



■ IMPROPER CONNECTION PREVENTION LOCK MECHANISM

- This improper connection prevention lock mechanism consists of the center airbag sensor assembly and the holder.
- The center airbag sensor assembly has a connector lock pin.
- The holder has a lever with a lock groove. The holder and the connectors are locked via a retainer and a lance.

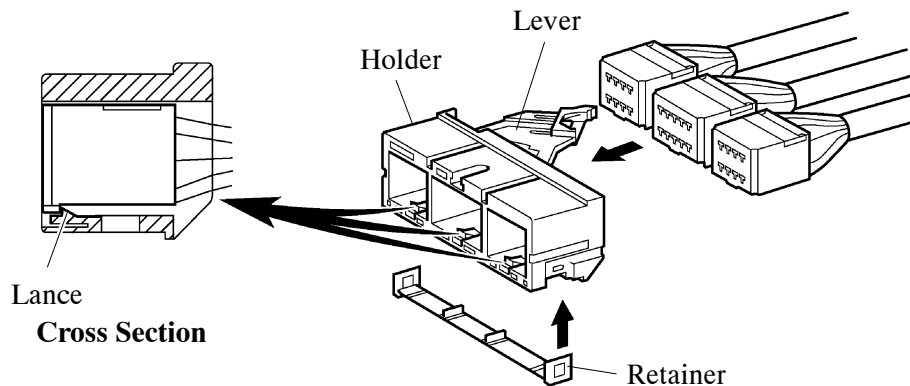

264BE45

- When connecting the holder and connectors to the center airbag sensor assembly, the lever is pushed into position and rotated around the axis of the connector lock pin in order to lock the holder securely.

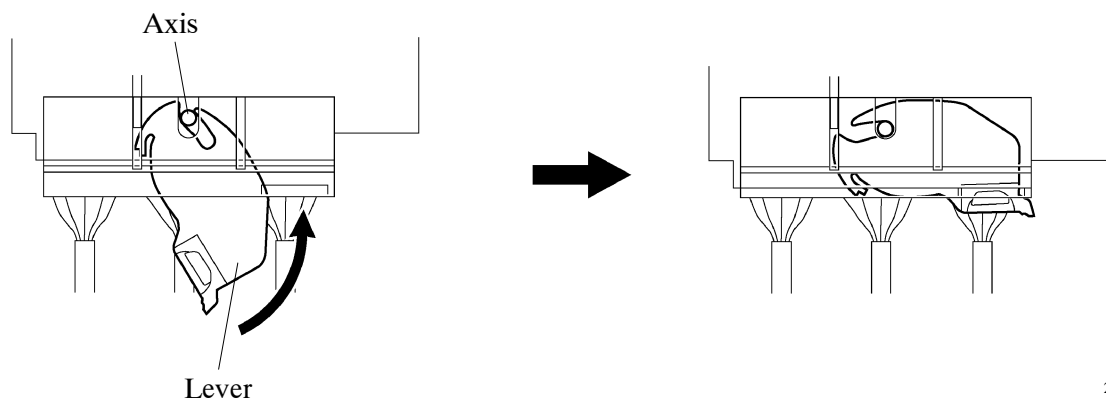

264BE46