


■ TORQUE CONVERTER CLUTCH

A compact, lightweight and high-capacity torque converter clutch is used. The torque converter clutch supports flex lock-up clutch control, thus allowing for improved fuel economy.

► Specifications ◀


Torque Converter Clutch Type	3-element, 1-step, 2-phase
Stall Torque Ratio	1.8

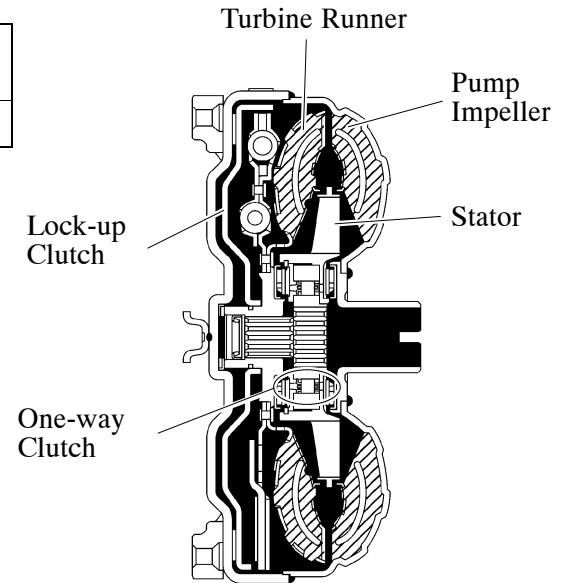

04E1CH03Z

■ OIL PUMP

The oil pump is driven by the torque converter clutch. It lubricates the planetary gear units and supplies operating fluid pressure for hydraulic control.

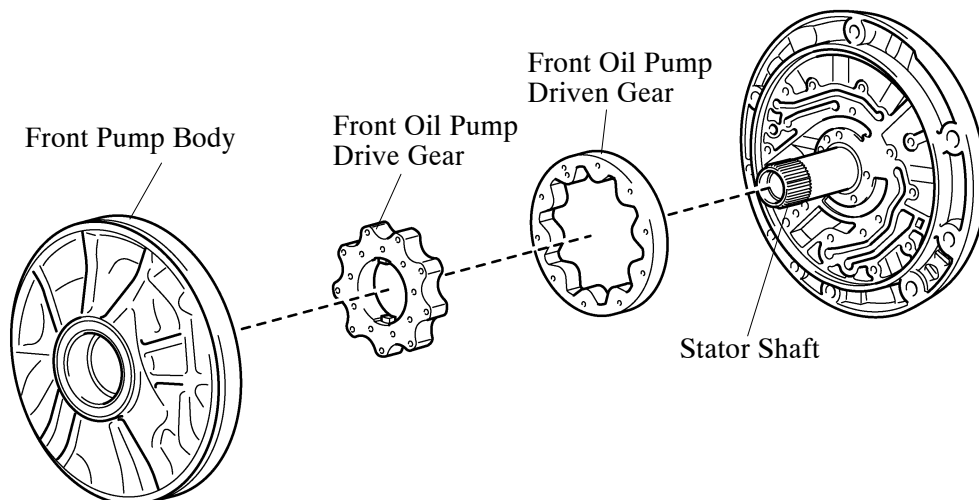

080CH01Y

■ ATF COOLING SYSTEM

- In order to cool down the ATF, both water cooled and air cooled oil coolers have been provided.
- The basic construction and operation are same as those of the A750F automatic transmission. For details, see [page CH-10](#).