



## REAR DIFFERENTIAL

- The rear differential uses the BD24A types.
- The limited slip differential and differential lock are available as options on all models except VX grade models.
- Low viscosity oil is used for the rear differential, thus lowering the fuel consumption.

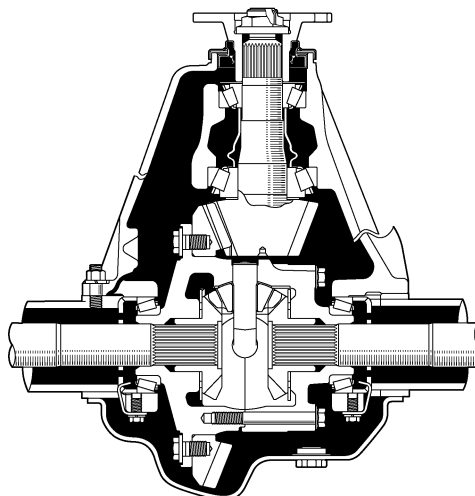


080CH20Y

**Standard**

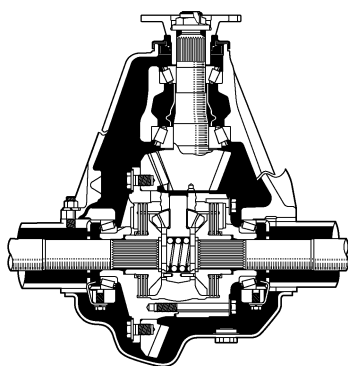

081CH21Y

**With Limited Slip Differential**

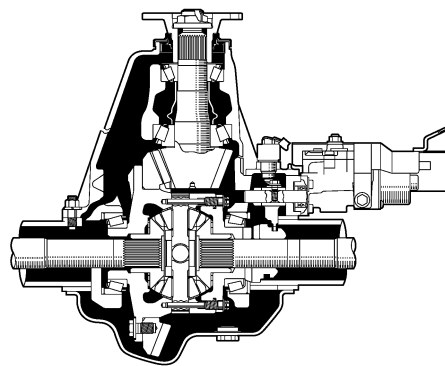

081CH22Y

**With Differential Lock**

### ► Specifications ◀

| Differential Type                 | BD24A                                                                   |         |
|-----------------------------------|-------------------------------------------------------------------------|---------|
| Engine Type                       | 2UZ-FE,<br>1GR-FE                                                       | 1VD-FTV |
| Differential Gear Ratio           | 4.100                                                                   | 3.909   |
| Ring Gear Size                    | mm (in.)                                                                | ←       |
| Oil Capacity                      | Liters (US qts, Imp.qts)                                                | ←       |
| Oil Viscosity                     | SAE 75W-85                                                              | ←       |
| Oil Grade                         | API GL-5                                                                | ←       |
| Weight (Reference) * <sup>1</sup> | kg (lb)                                                                 | ←       |
|                                   | 38.0 (83.8), 39.6 (87.3) * <sup>2</sup> ,<br>41.6 (91.7) * <sup>3</sup> |         |

\*<sup>1</sup>: Weight shows the figure with no fluids.

\*<sup>2</sup>: with limited slip differential

\*<sup>3</sup>: with differential lock