


2UZ-FE ENGINE


■ DESCRIPTION

The 2UZ-FE engine is a V8 4.7-liter, 32-valve DOHC. This engine is added the VVT-i (Variable Valve Timing-intelligent) system, ACIS (Acoustic Control Induction System), and Air Injection system* to achieve high performance and reduce exhaust emissions.

*: Only for European, Australian and Chinese models

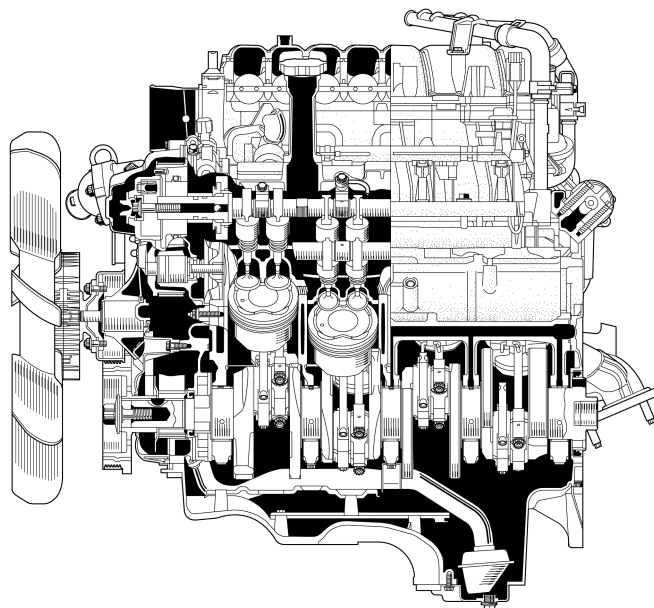

081EG24Z

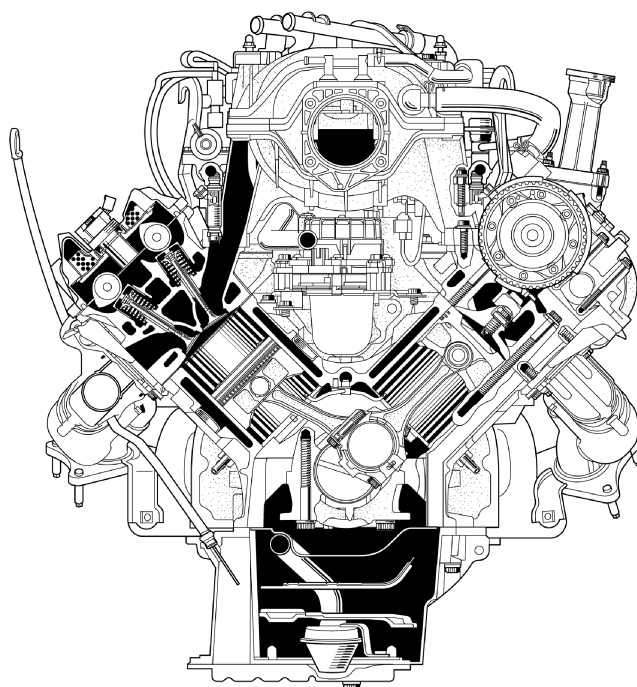

081EG25Z

► Engine Specifications ◀

No. of Cyls. & Arrangement			8-Cylinder, V Type
Valve Mechanism			32-Valve DOHC, Belt & Gear Drive (with VVT-i)
Combustion Chamber			Pentroof Type
Manifolds			Cross-flow
Fuel System			EFI
Ignition System			DIS
Displacement		cm ³ (cu. in.)	4664 (284.5)
Bore × Stroke		mm (in.)	94.0 × 84.0 (3.70 × 3.31)
Compression Ratio			10.0 : 1
Max. Output	Europe	[ECE]	212 kW @ 5400 rpm
	Except Europe* ¹	[SAE-NET]	202 kW @ 5400 rpm
Max. Torque	Europe	[ECE]	445 N·m @ 3400 rpm
	Except Europe* ¹	[SAE-NET]	410 N·m @ 3400 rpm
Valve Timing	Intake	Open	25° BTDC to 15° ATDC
		Close	19° ABDC to 59° ABDC
	Exhaust	Open	46° BBDC
		Close	3° ATDC
Firing Order			1-8-4-3-6-5-7-2
Oil Grade			API grade SL “Energy-Conserving”, SM “Energy-Conserving” or ILSAC
Research Octane Number (RON)		Europe	95 or higher* ³
		Except Europe* ¹	91 or higher
Emission Regulation		G.C.C. Countries	EURO III
		General Countries	
		Europe	EURO IV
		Australia	
		China	
Engine Service Mass* ² (Reference) kg (lb)		Models with Air Injection System	239 (527)
		Models without Air Injection System	235 (518)


*1: European models equipped with a pre-cleaner are included.

*2: The figure shown is the weight of the part without coolant and oil.

*3: Premium unleaded gasoline with a Research Octane Number 95 or higher required for optimum engine performance. If 95 octane cannot be obtained, you may use unleaded gasoline with a Research Octane Number as low as 91. Use of unleaded fuel with a Research Octane Number lower than 95 may result in engine knocking and significantly reduced performance. Persistent knocking can lead to engine damage and should be corrected by refueling with higher octane unleaded gasoline.


► Valve Timing ◀

 : Intake Valve Opening Angle
 : Exhaust Valve Opening Angle

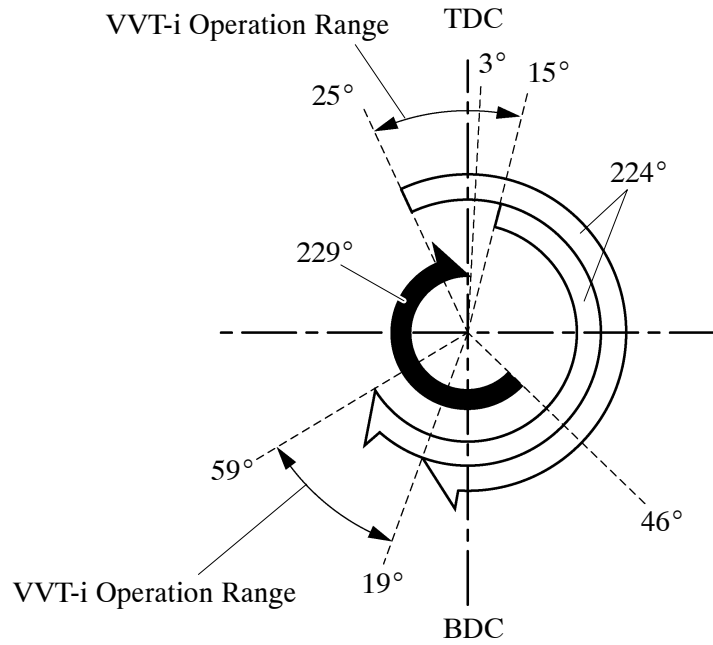


04E0EG75C

► Performance Curve ◀

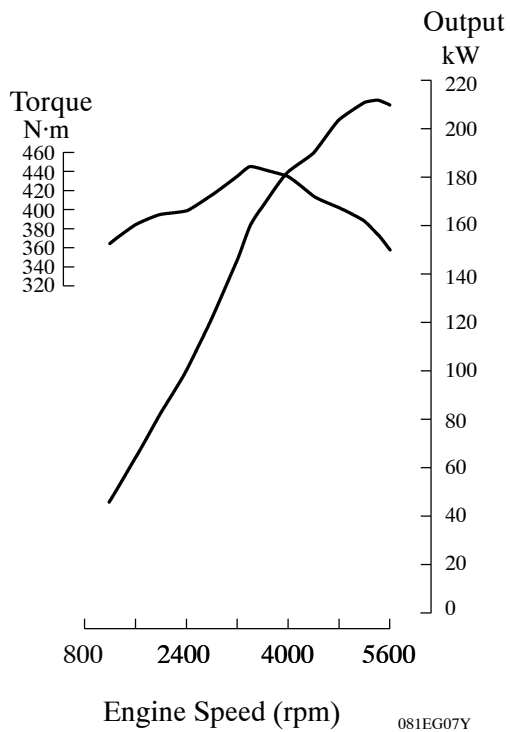

European Models

081EG07Y

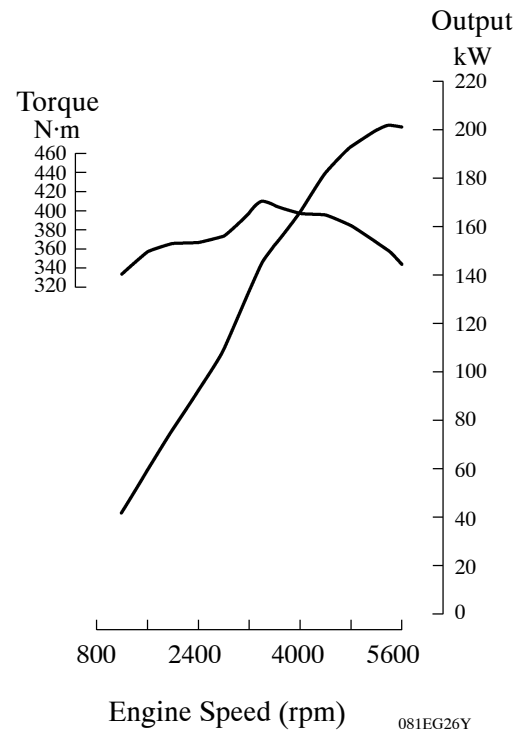

Except European Models*

081EG26Y

*: European models equipped with a pre-cleaner are included.