


■ LUBRICATION SYSTEM


1. General

- The lubrication circuit is fully pressurized and oil passes through an oil filter.
- A trochoid gear type oil pump is used. This pump is directly driven by the crankshaft.
- A water-cooled type engine oil cooler is used.

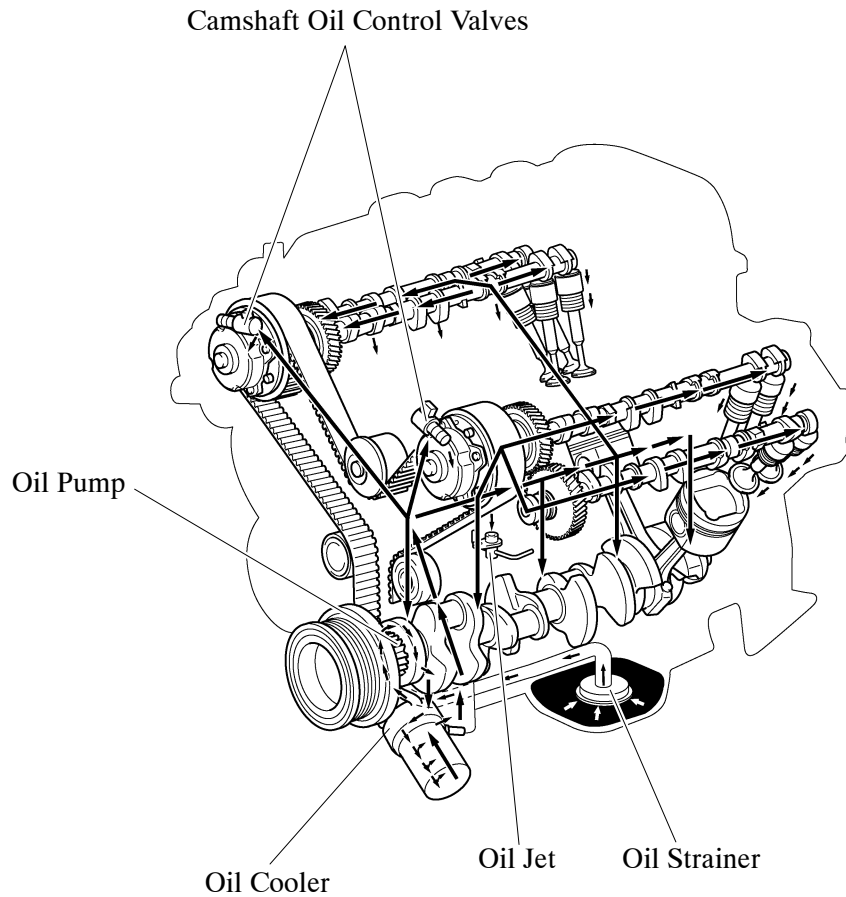

273GX05

► Oil Circuit ◀

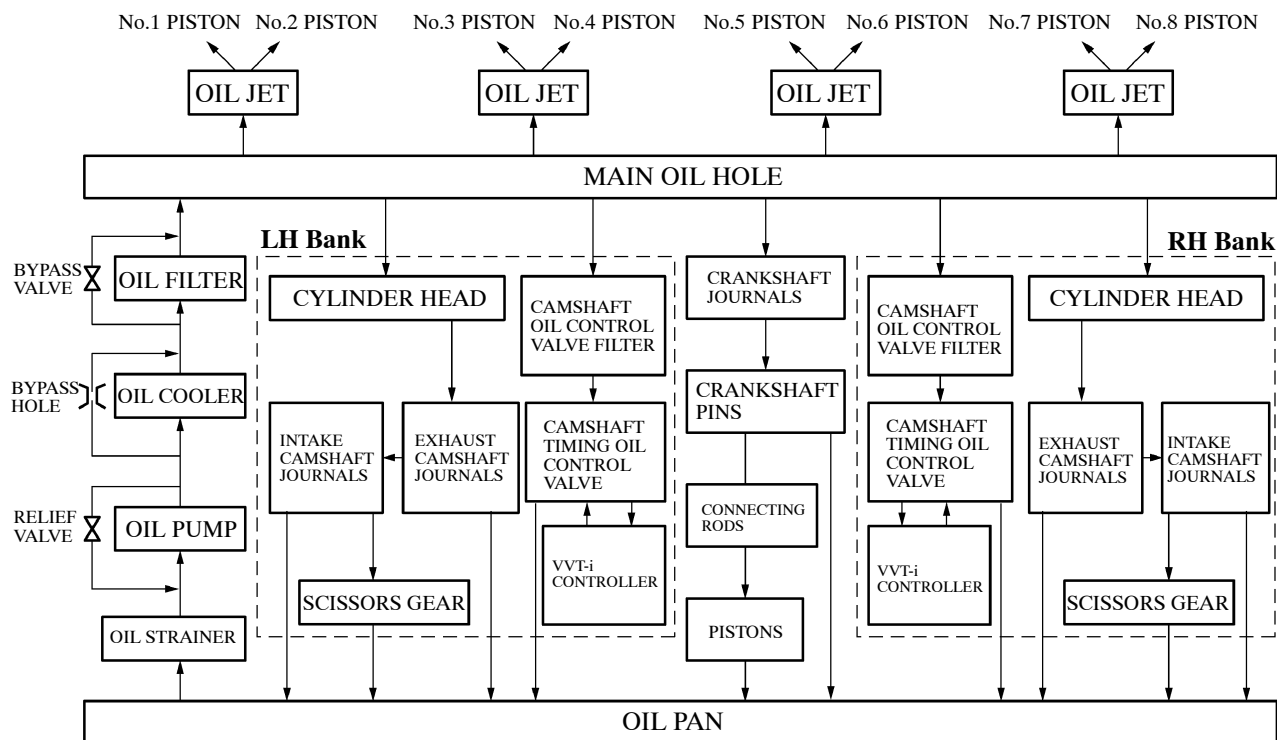


04E0EG46C

► Oil Capacity ◀

Oil Capacity [Liters (US qts, Imp. qts)]	Dry	7.1 (7.5, 6.2)
	with Oil Filter	6.2 (6.6, 5.5)
	without Oil Filter	5.7 (6.0, 5.0)

2. Oil Jet

- Four oil jets for cooling and lubricating the pistons are provided in the cylinder block, in the center of the right and left banks.
- These oil jets contain a check valve to prevent oil from being fed when the oil pressure is low. This prevents the overall oil pressure in the engine from dropping.

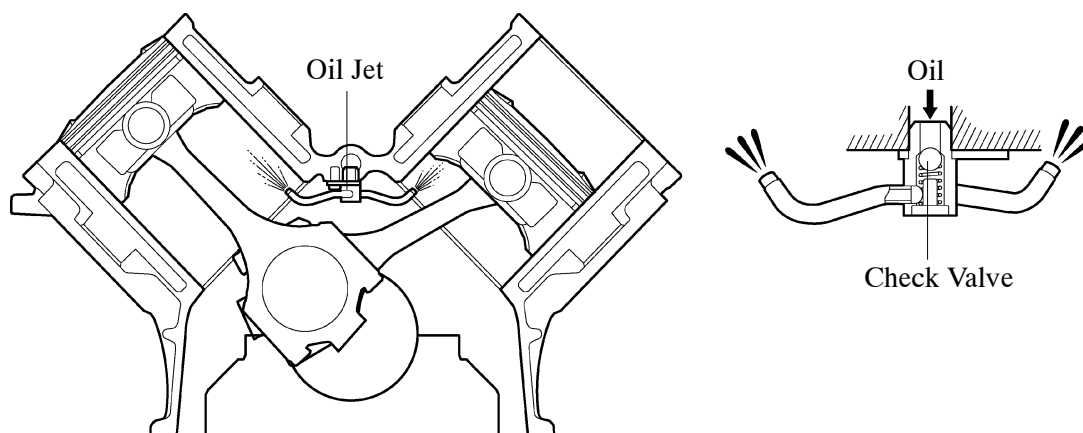

04E0EG47C