

PERFORMANCE

Power Train

Engine

Type		1GR-FE
No. of Cylinders & Arrangement		6-Cylinder, V Type
Valve Mechanism		24-Valve DOHC, Chain Drive (with VVT-i)
Displacement		3956 cm ³ (241.4 cu. in.)
Max. Output	[EEC-NET]	179 kW @ 5200 rpm
Max. Torque	[EEC-NET]	376 N·m @ 3800 rpm


Type			2UZ-FE
No. of Cylinders & Arrangement			8-Cylinder, V Type
Valve Mechanism			32-Valve DOHC, Belt & Gear Drive (with VVT-i)
Displacement			4664 cm ³ (284.5cu. in.)
Max. Output	Europe	[ECE]	212 kW @ 5400 rpm
	Except Europe*	[SAE-NET]	202 kW @ 5400 rpm
Max. Torque	Europe	[ECE]	445 N·m @ 3400 rpm
	Except Europe*	[SAE-NET]	410 N·m @ 3400 rpm

*: European models equipped with a pre-cleaner are included.

Type			1VD-FTV	
No. of Cylinders & Arrangement			8-Cylinder, V Type	
Valve Mechanism			32-valve, DOHC, Chain & Gear Drive	
Displacement			4461 cm ³ (272.2cu. in.)	
Max. Output [ECE]	Europe		210 kW @ 3600 rpm	
	Australia and Europe (Models with pre-cleaner)		195 kW @ 3400 rpm	
	G.C.C. Countries and General Countries	A/T	173 kW @ 3200 rpm	
		M/T	162 kW @ 3600 rpm	
Max. Torque [ECE]	Europe		650 N·m @ 1600 to 2800 rpm	
	Australia and Europe (Models with pre-cleaner)		650 N·m @ 1600 to 2600 rpm	
	G.C.C. Countries and General Countries	A/T	615 N·m @ 1800 to 2200 rpm	
		M/T	430 N·m @ 1200 to 3600 rpm	


Transmission

Type		5-speed Manual	5-speed Automatic	6-speed Automatic
		H150F	A750F	AB60F
Gear Ratio	1st	4.529	3.520	3.333
	2nd	2.464	2.042	1.960
	3rd	1.490	1.400	1.353
	4th	1.000	1.000	1.000
	5th	0.881	0.716	0.728
	6th	—	—	0.588
	Reverse	4.313	3.224	3.061

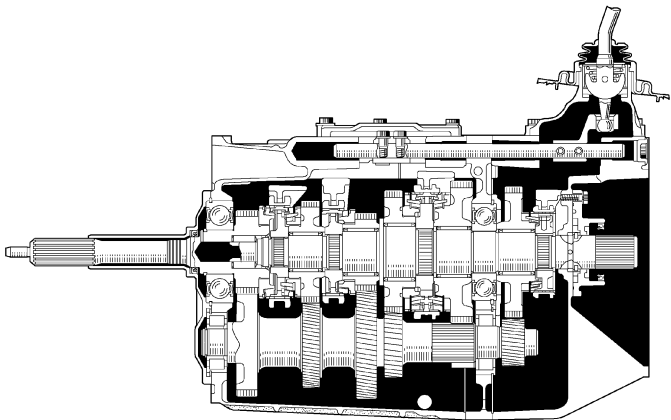


081CH05Y

H150F Manual Transmission

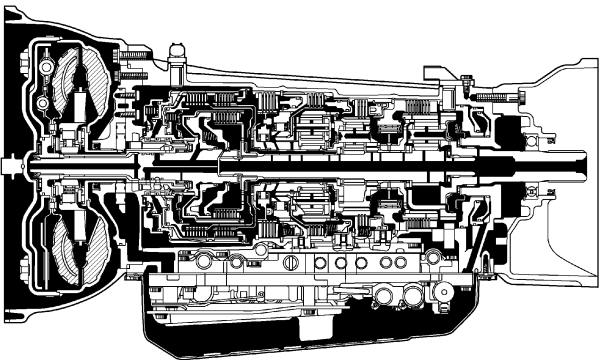

A750F Automatic Transmission

081CH06Y

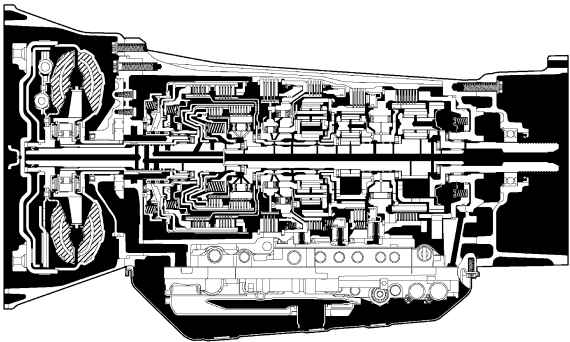


AB60F Automatic Transmission

04E1CH02Z

Transfer

Transfer Type	JF2A
AWD Type	Full-time
Center Differential Gear Type	TORSEN LSD

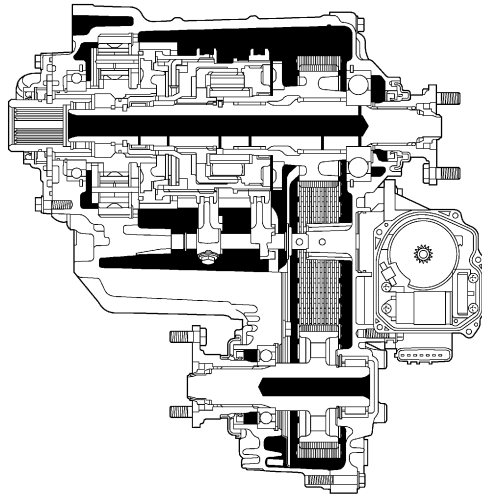


080CH30Y


MO

Differential

Engine Type		2UZ-FE, 1GR-FE	1VD-FTV
Front Differential	Type	SD22A	SD22A
	Gear Ratio	4.100	3.909
	Ring Gear Size mm (in.)	220 (8.7)	220 (8.7)
Rear Differential	Type	BD24A	BD24A
	Gear Ratio	4.100	3.909
	Ring Gear Size mm (in.)	241 (9.5)	241 (9.5)

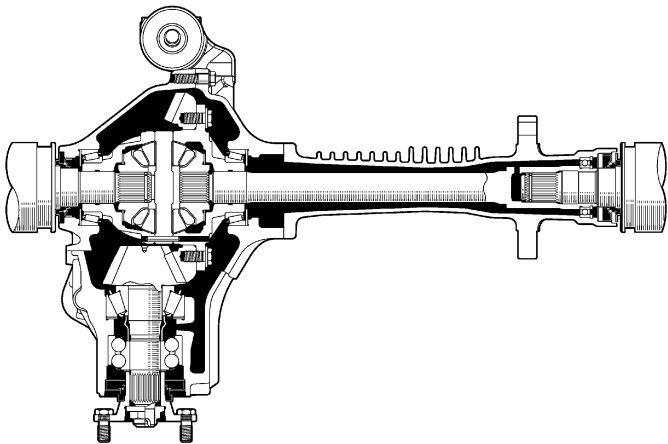

080CH19Y

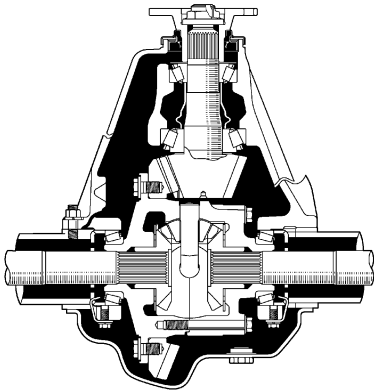

080CH20Y

Front Differential

Rear Differential