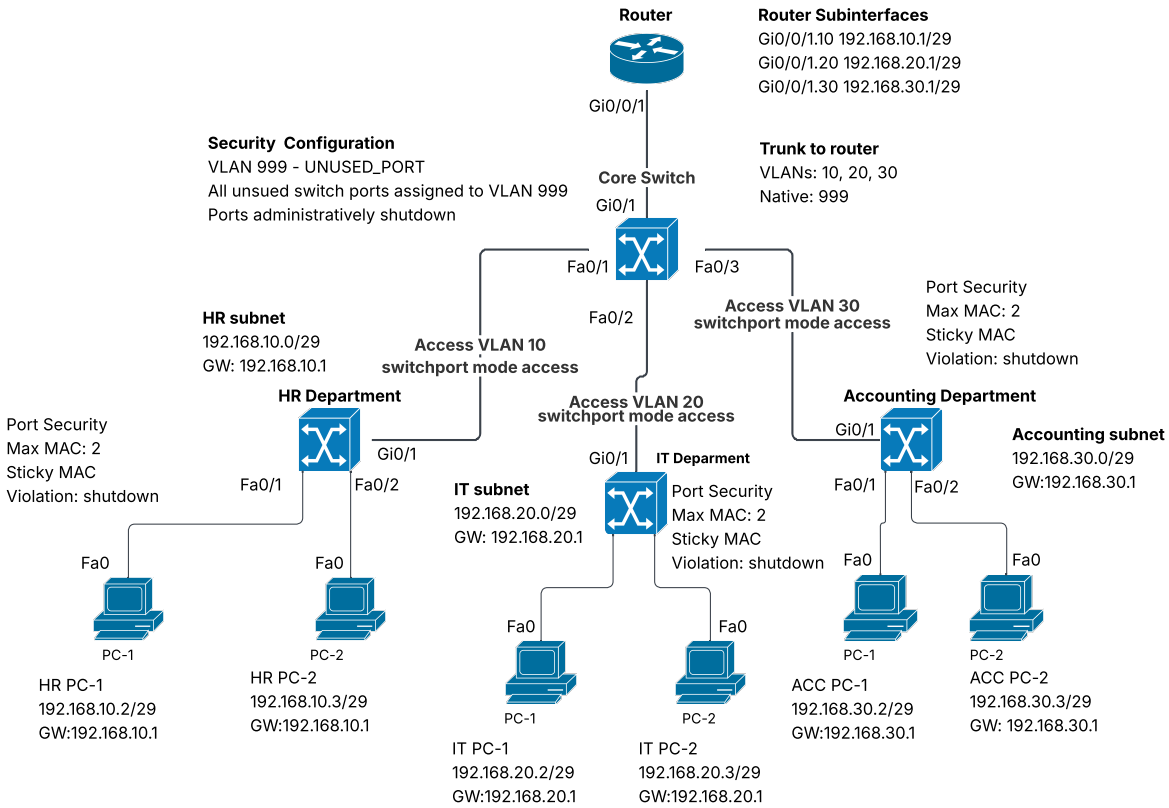
Router
Router Subinterfaces
Gi0/0/1.10 192.168.10.1/29
Gi0/0/1.20 192.168.20.1/29
Gi0/0/1.30 192.168.30.1/29
Gi0/0/1
Security Configuration
VLAN 999 - UNUSED_PORT
All unsued switch ports assigned to VLAN 999
Ports administratively shutdown
Core Switch
Trunk to router
VLANs: 10, 20, 30
Native: 999
Gi0/1
Fa0/1
Fa0/3
Fa0/2
HR subnet
192.168.10.0/29
GW: 192.168.10.1
Access VLAN 10
switchport mode access
Access VLAN 30
switchport mode access
Port Security
Max MAC: 2
Sticky MAC
Violation: shutdown
HR Department
Access VLAN 20
switchport mode access
Accounting Department
Port Security
Max MAC: 2
Sticky MAC
Violation: shutdown
Gi0/1
Gi0/1
Gi0/1
Accounting subnet
192.168.30.0/29
GW:192.168.30.1
IT Deparment
IT subnet
192.168.20.0/29
GW: 192.168.20.1
Port Security
Max MAC: 2
Sticky MAC
Violation: shutdown
Fa0/1
Fa0/2
Fa0/1
Fa0/2
Fa0
Fa0
Fa0
Fa0
Fa0
Fa0
PC-1
PC-2
PC-1
PC-2
PC-1
PC-2
HR PC-1
192.168.10.2/29
GW:192.168.10.1
HR PC-2
192.168.10.3/29
GW:192.168.10.1
IT PC-1
192.168.20.2/29
GW:192.168.20.1
IT PC-2
192.168.20.3/29
GW:192.168.20.1
ACC PC-1
192.168.30.2/29
GW:192.168.30.1
ACC PC-2
192.168.30.3/29
GW: 192.168.30.1