
```
// key V Autentifikatsiyalash (tanish)
Serial.println(F("Authenticating again using key V..."));
// blokka axborotlarni yozish
Serial.print(F("Writing data into block "));
Serial.print(blockAddr);
Serial.printing(" ..."));
dump_byte_array(dataBlock, 2); Serial.println();
}
// NEX-koʻrinishda axborotlarni oʻqilgan natijasini chiqarish
void dump_byte_array(byte *buffer, byte bufferSize)
{
for (byte i = 0; i < bufferSize; i++)
{
Serial.print(buffer[i] < 0x10 ? " 0" : "");
Serial.print(buffer[i], HEX);
}
}</pre>
```

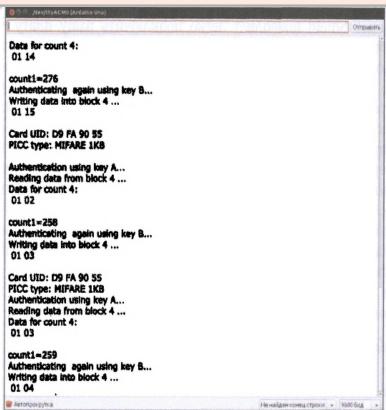

28.3 chizma. Ketma – ket portga belgidagi sanoq qurilma haqidagi axborotni chiqarish

Mavzu doirasidan qo'shimcha savollar.

- 1. RFID reader qanday ishlaydi?
- 2. RFID card yordamida eshik uchun qulf tayyorlash
- 3. Smart house loyihasi