


24V Thunder Tank (EC-1829)

Step By Step Assembly Procedures

Note : Please follow all procedures strictly to ensure assembly quality .


**Please check if all below parts are included in the package.
These are the parts needed for assembly .**

**For technical support and spare parts ,please contact below numbers :
Toll-Free : 1-866-424-0500 Local : 417-204-0563**

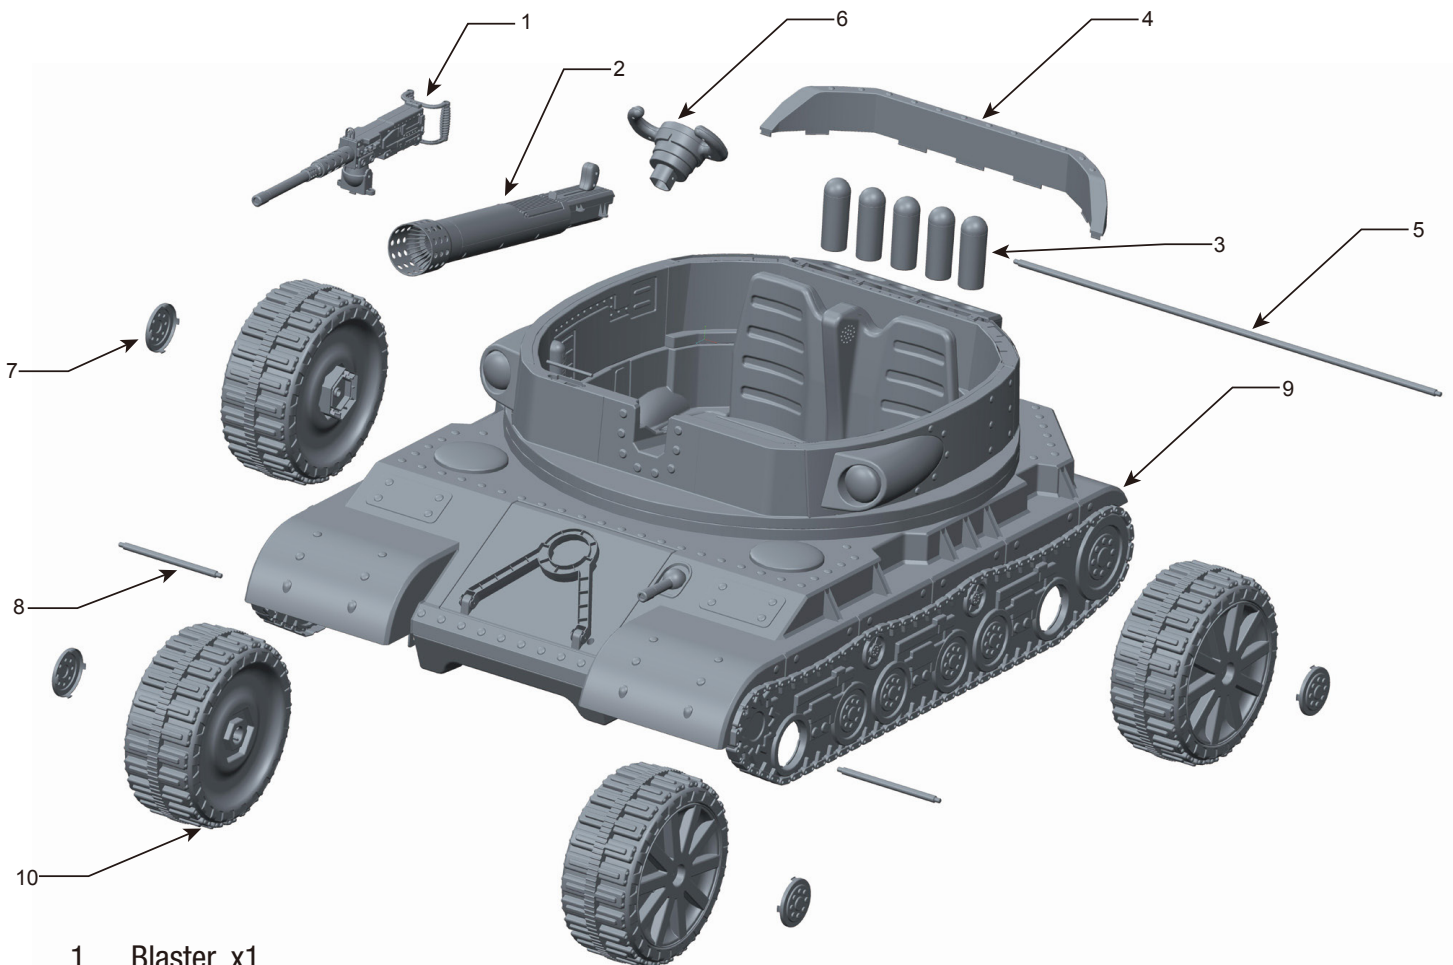

1. Blaster x1
2. Cannon x1
3. Cannon Shells x5
4. Backrest x1
5. Rear Axle x1
6. Steering Wheel x1
7. Side Plate Decorative Cover x4
8. Front Axle x2
9. Tank Body x1
10. Wheel x4

Tools






Socket Wrench x 2



Screwdriver x1

Assembly


Tools needed: Screwdriver

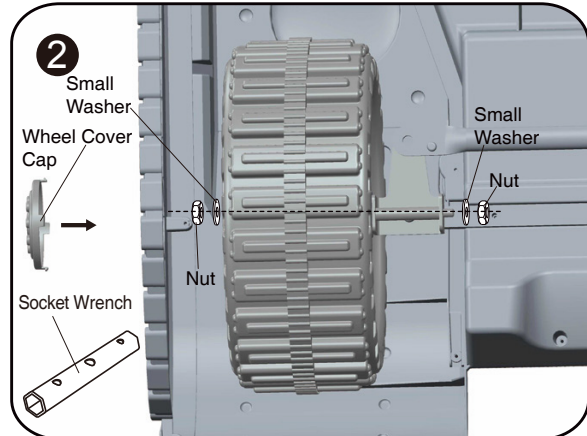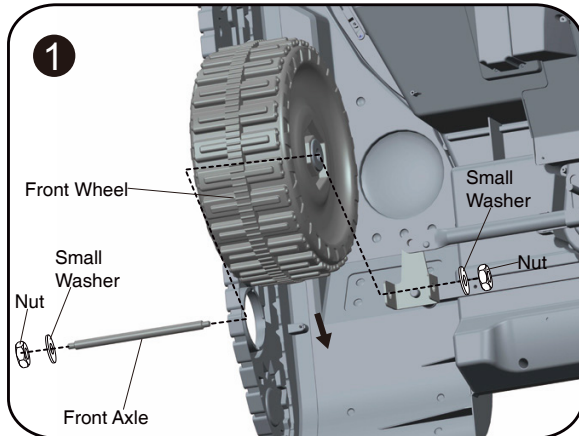

Install the Front Wheel


Find the front wheel and front axle, remove the nuts and small washers from the axle. Place the front wheel as shown in **Diagram 1**, and pass the front axle through the front wheel and front axle base. Insert the washer and nut at each end of the front axle and tighten with the socket wrench provided. Put the wheel cover cap in place as shown in **Diagram 2**.

Note: Repeat on the other side.

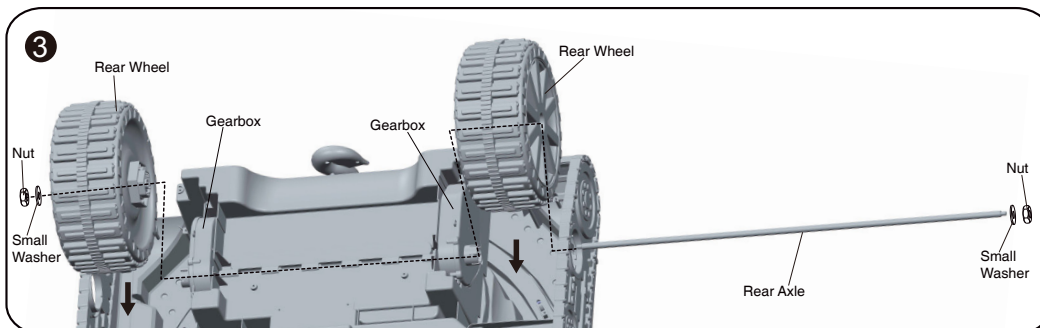

Install the Rear Wheel


Find the rear wheel and rear axle, remove the nuts and small washers from the axle. Place the rear wheel in position as shown in **Diagram 3**. Pass the rear axle through the rear wheel, gearbox, and rear axle base. Insert a washer and a nut at each end of the rear axle and tighten with the socket wrench provided at the same time. Add the wheel cover cap in place as shown in **Diagram 4**.

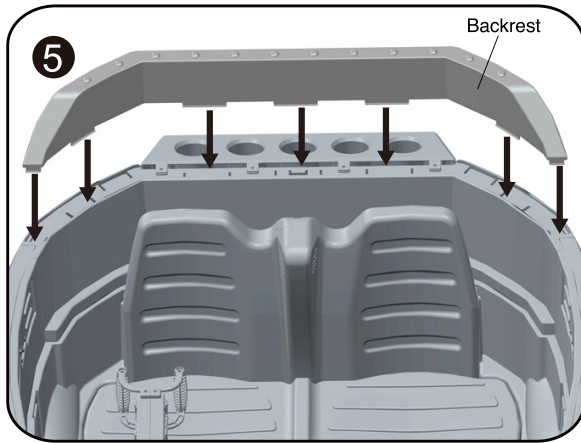

Install the Backrest

Find the backrest. Align the hooks on the backrest with the slots on the body and snap into place. You will hear a solid click sound when the backrest is correctly fitted. Double check that each hook is aligned properly.

Diagram 5

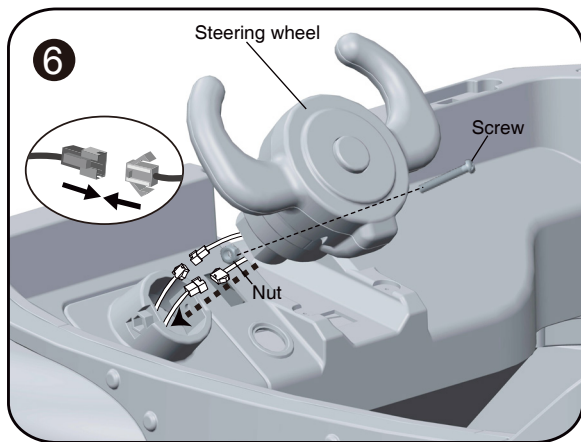


Install the Steering Wheel

Find the steering wheel. Connect the terminal on the steering wheel with the terminal on the body. (make sure the terminal are connected in the same color.)

Align the hole on the steering wheel with the hole on the body. As you insert it, make sure the screw hole on the steering wheel and on the body is on the same line. Tighten the screw.

Diagram 6

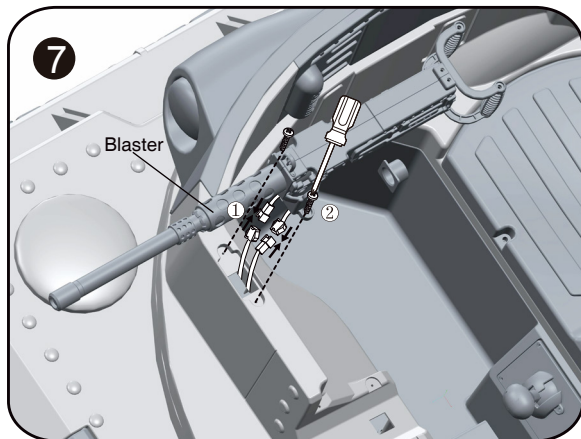


Install the Blaster

Find the blaster. Connect the wire terminal on the blaster to the body (make sure the terminal are connected in the same color).

Insert the wire terminal into the hole on the body. Install the blaster into position on the body. Tighten the 2 screws.

Diagram 7

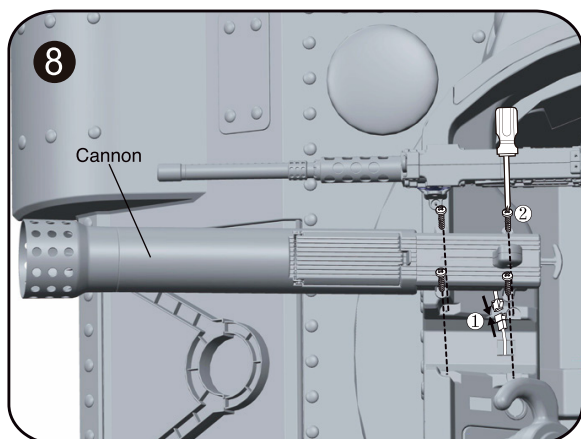

Install the Cannon

Find the cannon. Connect the wire terminal on the cannon to the body. Insert the wire terminal into the hole on the body. Install the cannon into position on the body. Tighten the 4 screws.

Diagram 8

Pictures of actual products

EC-1829

24V Thunder Tank

