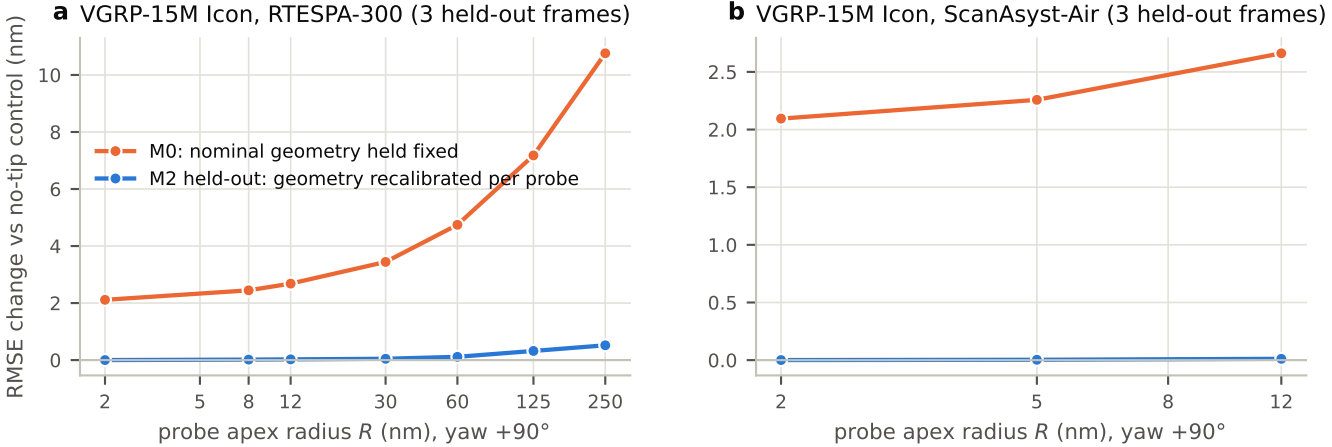
a VGRP-15M Icon, RTESPA-300 (3 held-out frames)
RMSE change vs no-tip control (nm)
M0: nominal geometry held fixed
M2 held-out: geometry recalibrated per probe
probe apex radius R (nm), yaw +90°
b VGRP-15M Icon, ScanAsyst-Air (3 held-out frames)
probe apex radius R (nm), yaw +90°