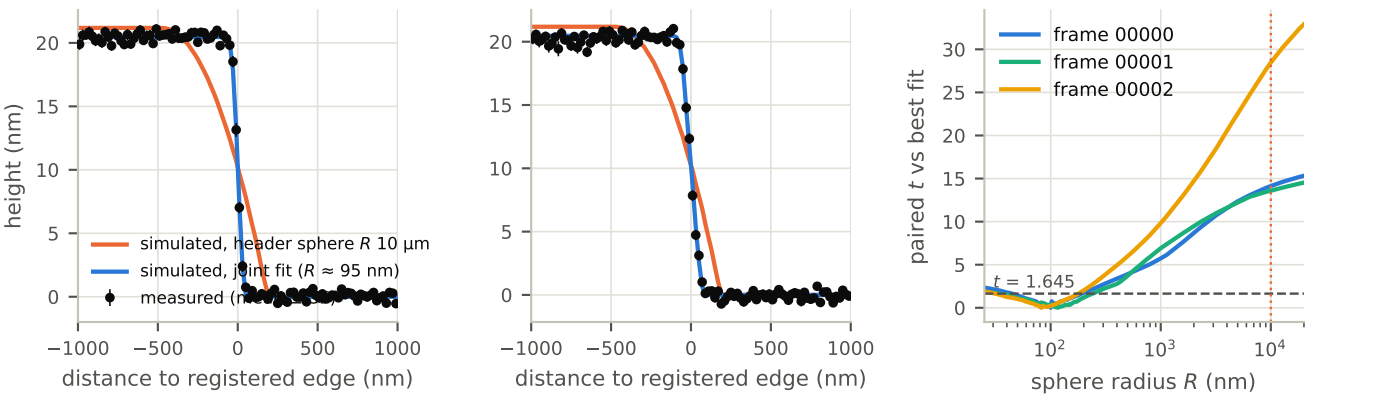
a slow-axis edges, frame 00000
b fast-axis edges, frame 00000
c joint fits, fitted fast-axis response
height (nm)
distance to registered edge (nm)
simulated, header sphere R 10 µm
simulated, joint fit (R ≈ 95 nm)
measured (noise)
paired t vs best fit
sphere radius R (nm)
frame 00000
frame 00001
frame 00002
t = 1.645