






KD 400 D - KD 400 PS

MITER SAW MACHINE
DERECELİ KESME MAKİNESİ

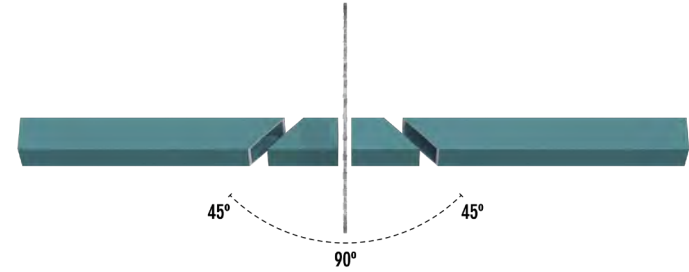

*The machine above is KD 400 PS.
*Fotoğrafta görülen makine KD 400 PS'dir.

				Bar	Air Cons.	WxLxH cm	
KD 400 D	2.2 kW 400V 3P PE 50-60 Hz.	D: Ø400 mm d: Ø30/32 mm	2.900 RPM	-	-	86x76x160	110
KD 400 PS				6-8	24 L/min.	86x76x160	137

GENERAL FEATURES

- Location points at 45° - 30° - 22.5° - 15° - 0° both left and right
- Pivoting range from 45° left to 45° right infinitely adjustable
- Aluminium construction of the body and machine stand made of steel sheet
- Robust mechanical construction enables the ease of adjustment for the requested cutting angles
- Strong spring system and protective shield

STANDARD ACCESSORIES

- Ø400 mm saw blade
- Machine stand
- 2x manual horizontal clamps (KD 400 D)
- 2x pneumatic horizontal clamps (KD 400 PS)
- Air gun (KD 400 PS)
- Spray saw blade lubrication system (KD 400 PS)

OPTIONAL ACCESSORIES

- 2 x pneumatic vertical clamps (KD 400 PS)
- MKN 300 length stop-right (3 m)
- MKN 300 length stop-left (3 m)
- DKN 302 length stop (3 m)
- DKN 602 length stop (6 m)
- Spare saw blade, Ø 400 mm
- Brake unit working with motor stop button (KD 400 PS)

GENEL ÖZELLİKLER

- 45° - 30° - 22.5° - 15° - 0° açılarda sağ ve sol yönde susta ile kesim
- 45° sol - 45° sağ ara derecelerde hassas kesim
- Alüminyumdan imal edilmiş makine gövdesi ve çelik sacdan üretilmiş makine sehpa
- İstenilen açılara kolay ayarlanabilir mekanik altyapı
- Sağlam yay sistemi ve koruyucu siper

STANDART AKSESUARLAR

- Ø400 mm testere
- Makine sehpa
- 2x manuel yatay mengene (KD 400 D)
- 2x pnömatik yatay mengene (KD 400 PS)
- Hava tabancası (KD 400 PS)
- Testere soğutma sistemi (KD 400 PS)

OPSİYONEL AKSESUARLAR

- 2 x pnömatik dikey mengene (KD 400 PS)
- MKN 300 konveyör sağ (3 m)
- MKN 300 konveyör sol (3 m)
- DKN 302 konveyör sağ (3 m)
- DKN 602 konveyör (sağ (6 m)
- Yedek Ø 400 mm testere
- Motor durdurma düğmesi ile çalışan fren ünitesi (KD 400 PS)

