

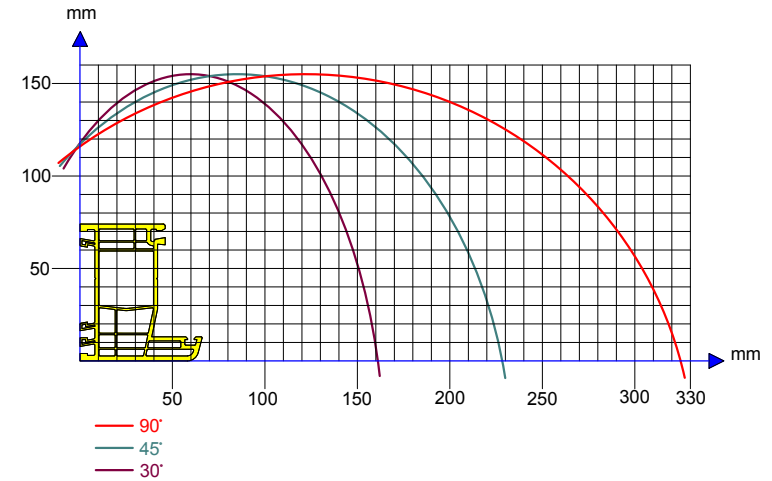


MK 420 - MK 420 PS MK 450

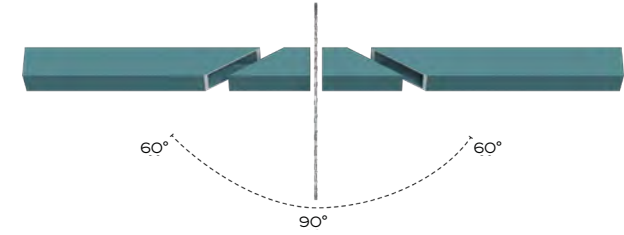

MANUAL UP-CUTTING SAW MACHINE
MANUEL ALTTAN ÇIKMA KESME MAKİNESİ



							
				WxLxH cm	Bar	Air Cons.	
MK 420	2.2 kW 230V AC 1P PE 50-60 Hz,	D: Ø420 mm d: Ø30/32 mm	2.900 RPM	72.5x86.5x135	-	-	115
							142
MK 420 PS	2.2 kW 400V AC 3P PE 50-60 Hz,	D: Ø420 mm d: Ø30/32 mm	2.900 RPM	72.5x86.5x135	6-8	7 L/min.	131
							159
MK 450	2.2 kW 4A 400V AC 3P PE 50-60 Hz,	D: Ø450 mm d: Ø30/32 mm	2.900 RPM	72.5x86.5x135	-	-	120
							143

GENERAL FEATURES

- Manual upward saw stroke
- The back fence is adjustable to allow the most effective use of the saw blade capacity for wide and flat profiles
- Location points at 60°, 45°, 30°, 22.5°, 15°, 0° for both left and right
- Wide angle cutting range up to 60° to the right and 60° to the left
- Adjustable machine working direction by means of rotatable (360°) platform via. foot pedal
- Easy saw blade change
- It has the ability of lateral and longitudinal cutting operations

STANDARD ACCESSORIES

- Equipped with saw blade Ø420 mm
- Equipped with saw blade Ø 450 mm (MK 450)
- Miter stop
- Profile length stop
- Pneumatically working spray saw blade lubrication system (MK 420 PS)
- Electrically working spray saw blade lubrication system (MK 420- MK 450)
- 2x mechanic top clamps (MK 420)
- 2x pneumatic top clamps (MK 420 PS)
- Safety guard for lateral cutting operations (MK 420 PS)

OPTIONAL ACCESSORIES

- Safety guard for longitudinal cutting operations (MK 420 PS)
- 2 x vertical clamps
- MKN 300 length stop (3m)
- Connection kit for MKN and DKN length stops
- Spare saw blade, Ø420 mm
- Spare saw blade, Ø450 mm (MK 450)

GENEL ÖZELLİKLER

- Manuel olarak yukarı hareket eden testere mekanizması
- Ayarlanabilir arka dayama ile geniş ve uzun profillerde testere kapasitesini optimum olarak kullanılır
- 60°, 45°, 30°, 22.5°, 15°, 0° açılarda sağ ve sol yönde susta ile kesim
- 60° sağ ve 60° sol tarafa dönebilen geniş açılı kesme kapasitesi
- Ayak pedalı ile 360° dönen özel kesim ünitesi ile makine çalışma yönü ayarlanabilir
- Kolay testere değiştirme
- Enine ve boyuna kesme (biçme) yapabilme imkanı

STANDART AKSESUARLAR

- Ø420 mm testere
- Ø450 mm testere takılı olarak (MK 450)
- Gönye dayama
- Profil dayama
- Pnömatik olarak çalışan püskürtmeli testere soğutma sistemi (MK 420 PS)
- Elektrik ile çalışan testere soğutma sistemi (MK 420 - MK 450)
- 2x mekanik üst mengene (MK 420)
- 2x pnömatik üst mengene (MK 420 PS)
- Enine kesme için güvenlik kapağı (MK 420 PS)

OPSİYONEL AKSESUARLAR

- Boyuna kesme (biçme) için güvenlik kapağı (MK 420 PS)
- 2x dikey mengene
- MKN 300 konveyör (3m)
- MKN ve DKN konveyörler için bağlantı kiti
- Ø420 mm yedek testere
- Ø450 mm yedek testere (MK 450)

