


ENGINE OIL

Ensure there is sufficient engine oil. Checks should be done with a cold engine and the motorcycle parked on a flat surface for accuracy.

How to check level of motorcycle engine oil


- Position the motorcycle upright.
- Remove the dipstick and wipe the oil with a clean cloth.
- Insert the dipstick without screwing it in, remove it and check the oil level.
- If the oil level is below or near the lower level line on the dipstick, remove the oil filler cap and add the recommended engine oil to the upper level line through the oil filler hole.

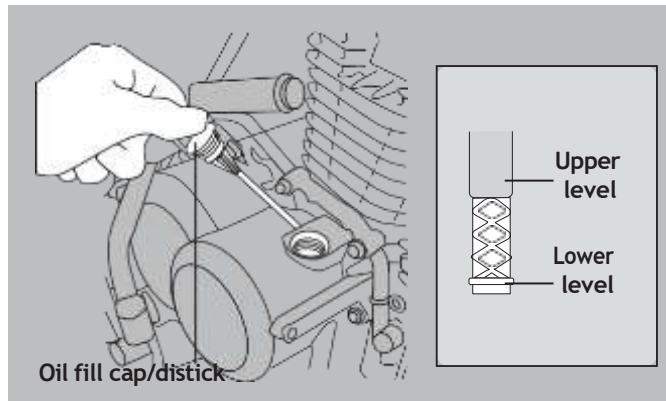


TYRES

Check the tyres for air pressure (under/over inflation), inspecting for damage, abnormal wear and tread depth (treads with a depth of less than 1.6 mm should be replaced).


INSPECTING FOR DAMAGE

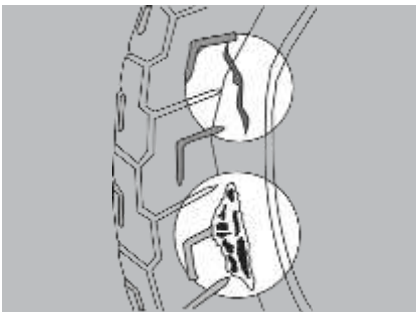

INSPECTING FOR ABNORMAL WEAR

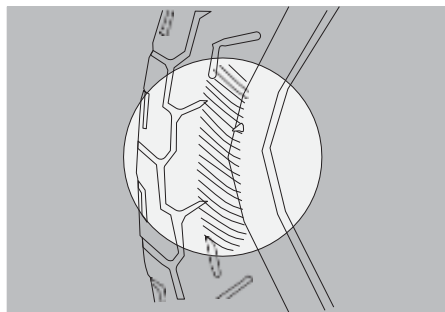

INSPECTING TREAD DEPTH

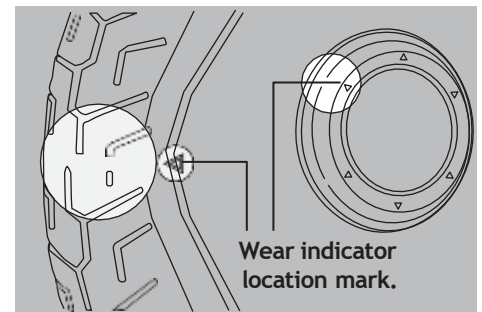

CHAIN

Check the tension. It should not be too tight or too loose. Find the midway point of the chain between the front and rear sprockets. Push up on the bottom of the chain and note the distance between the full-slack (lower) position and the no-slack (upper) position on the bottom. The proper amount of slack is about 20mm.

