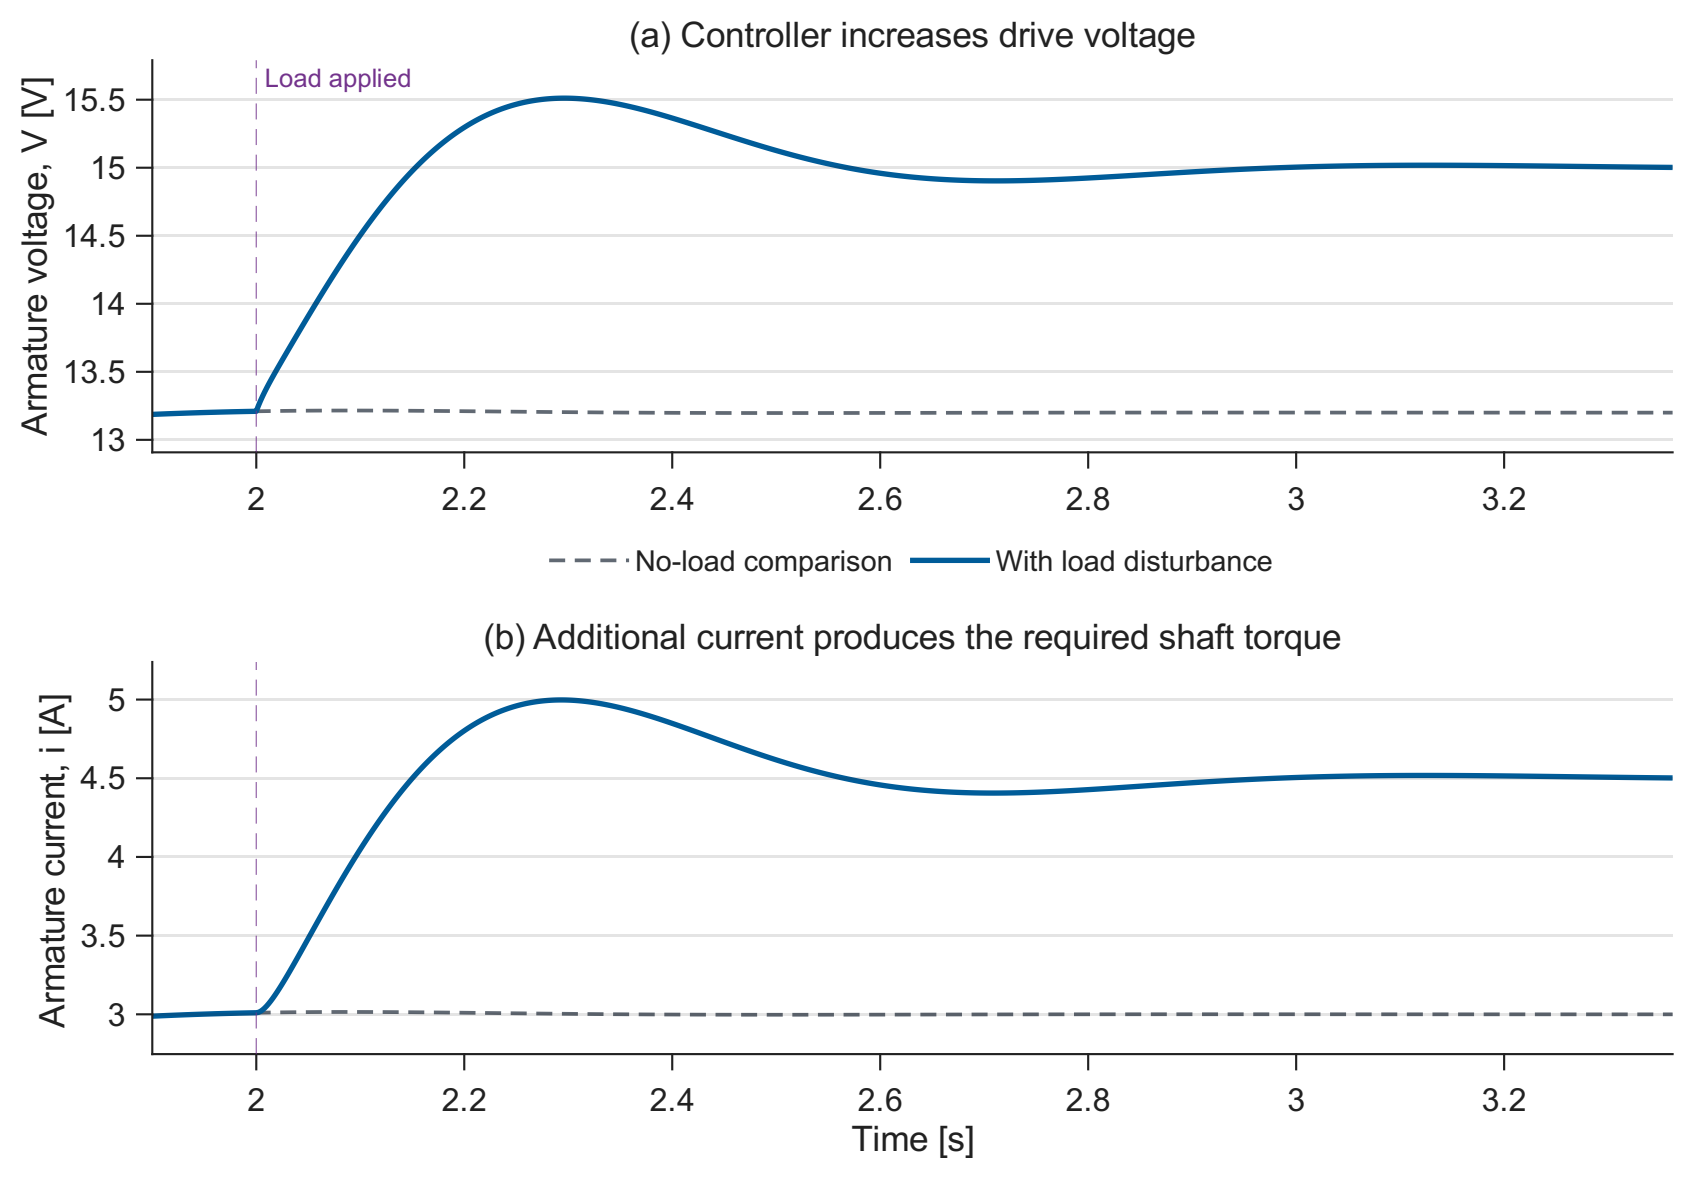
(a) Controller increases drive voltage
Load applied
Armature voltage, V [V]
15.5
15
14.5
14
13.5
13
2
2.2
2.4
2.6
2.8
3
3.2
No-load comparison
With load disturbance
(b) Additional current produces the required shaft torque
Armature current, i [A]
5
4.5
4
3.5
3
2
2.2
2.4
2.6
2.8
3
3.2
Time [s]