

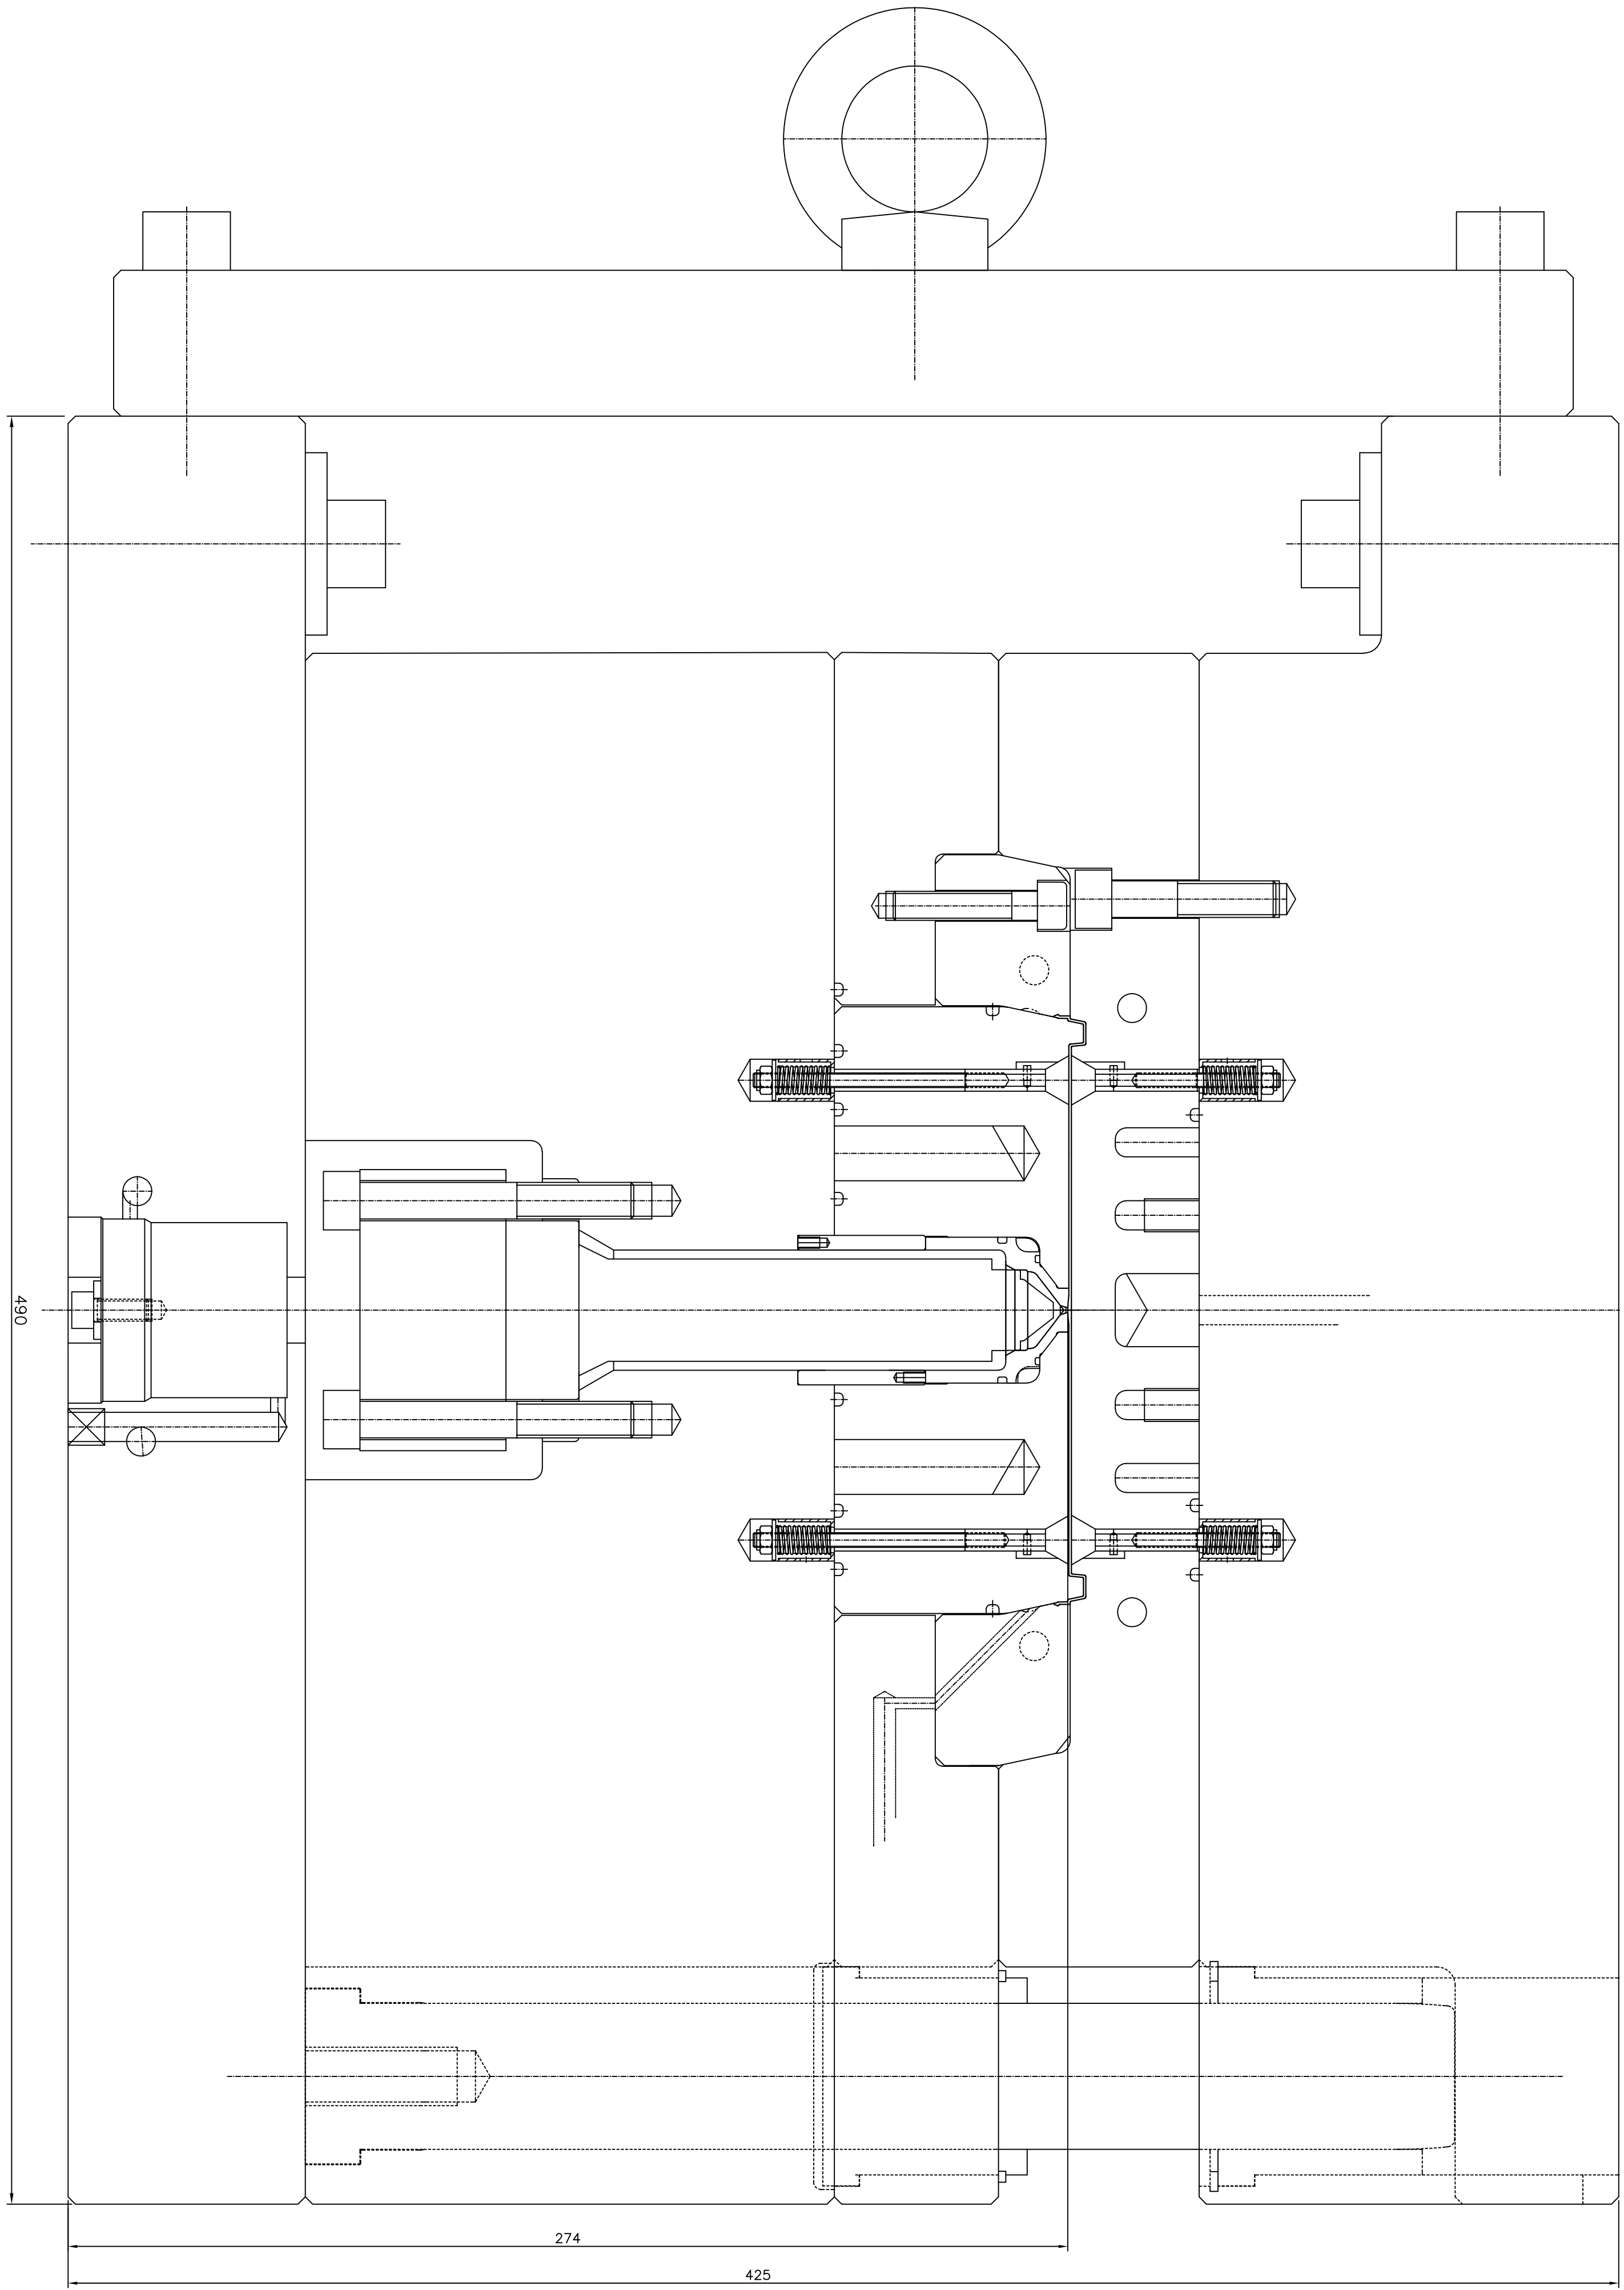


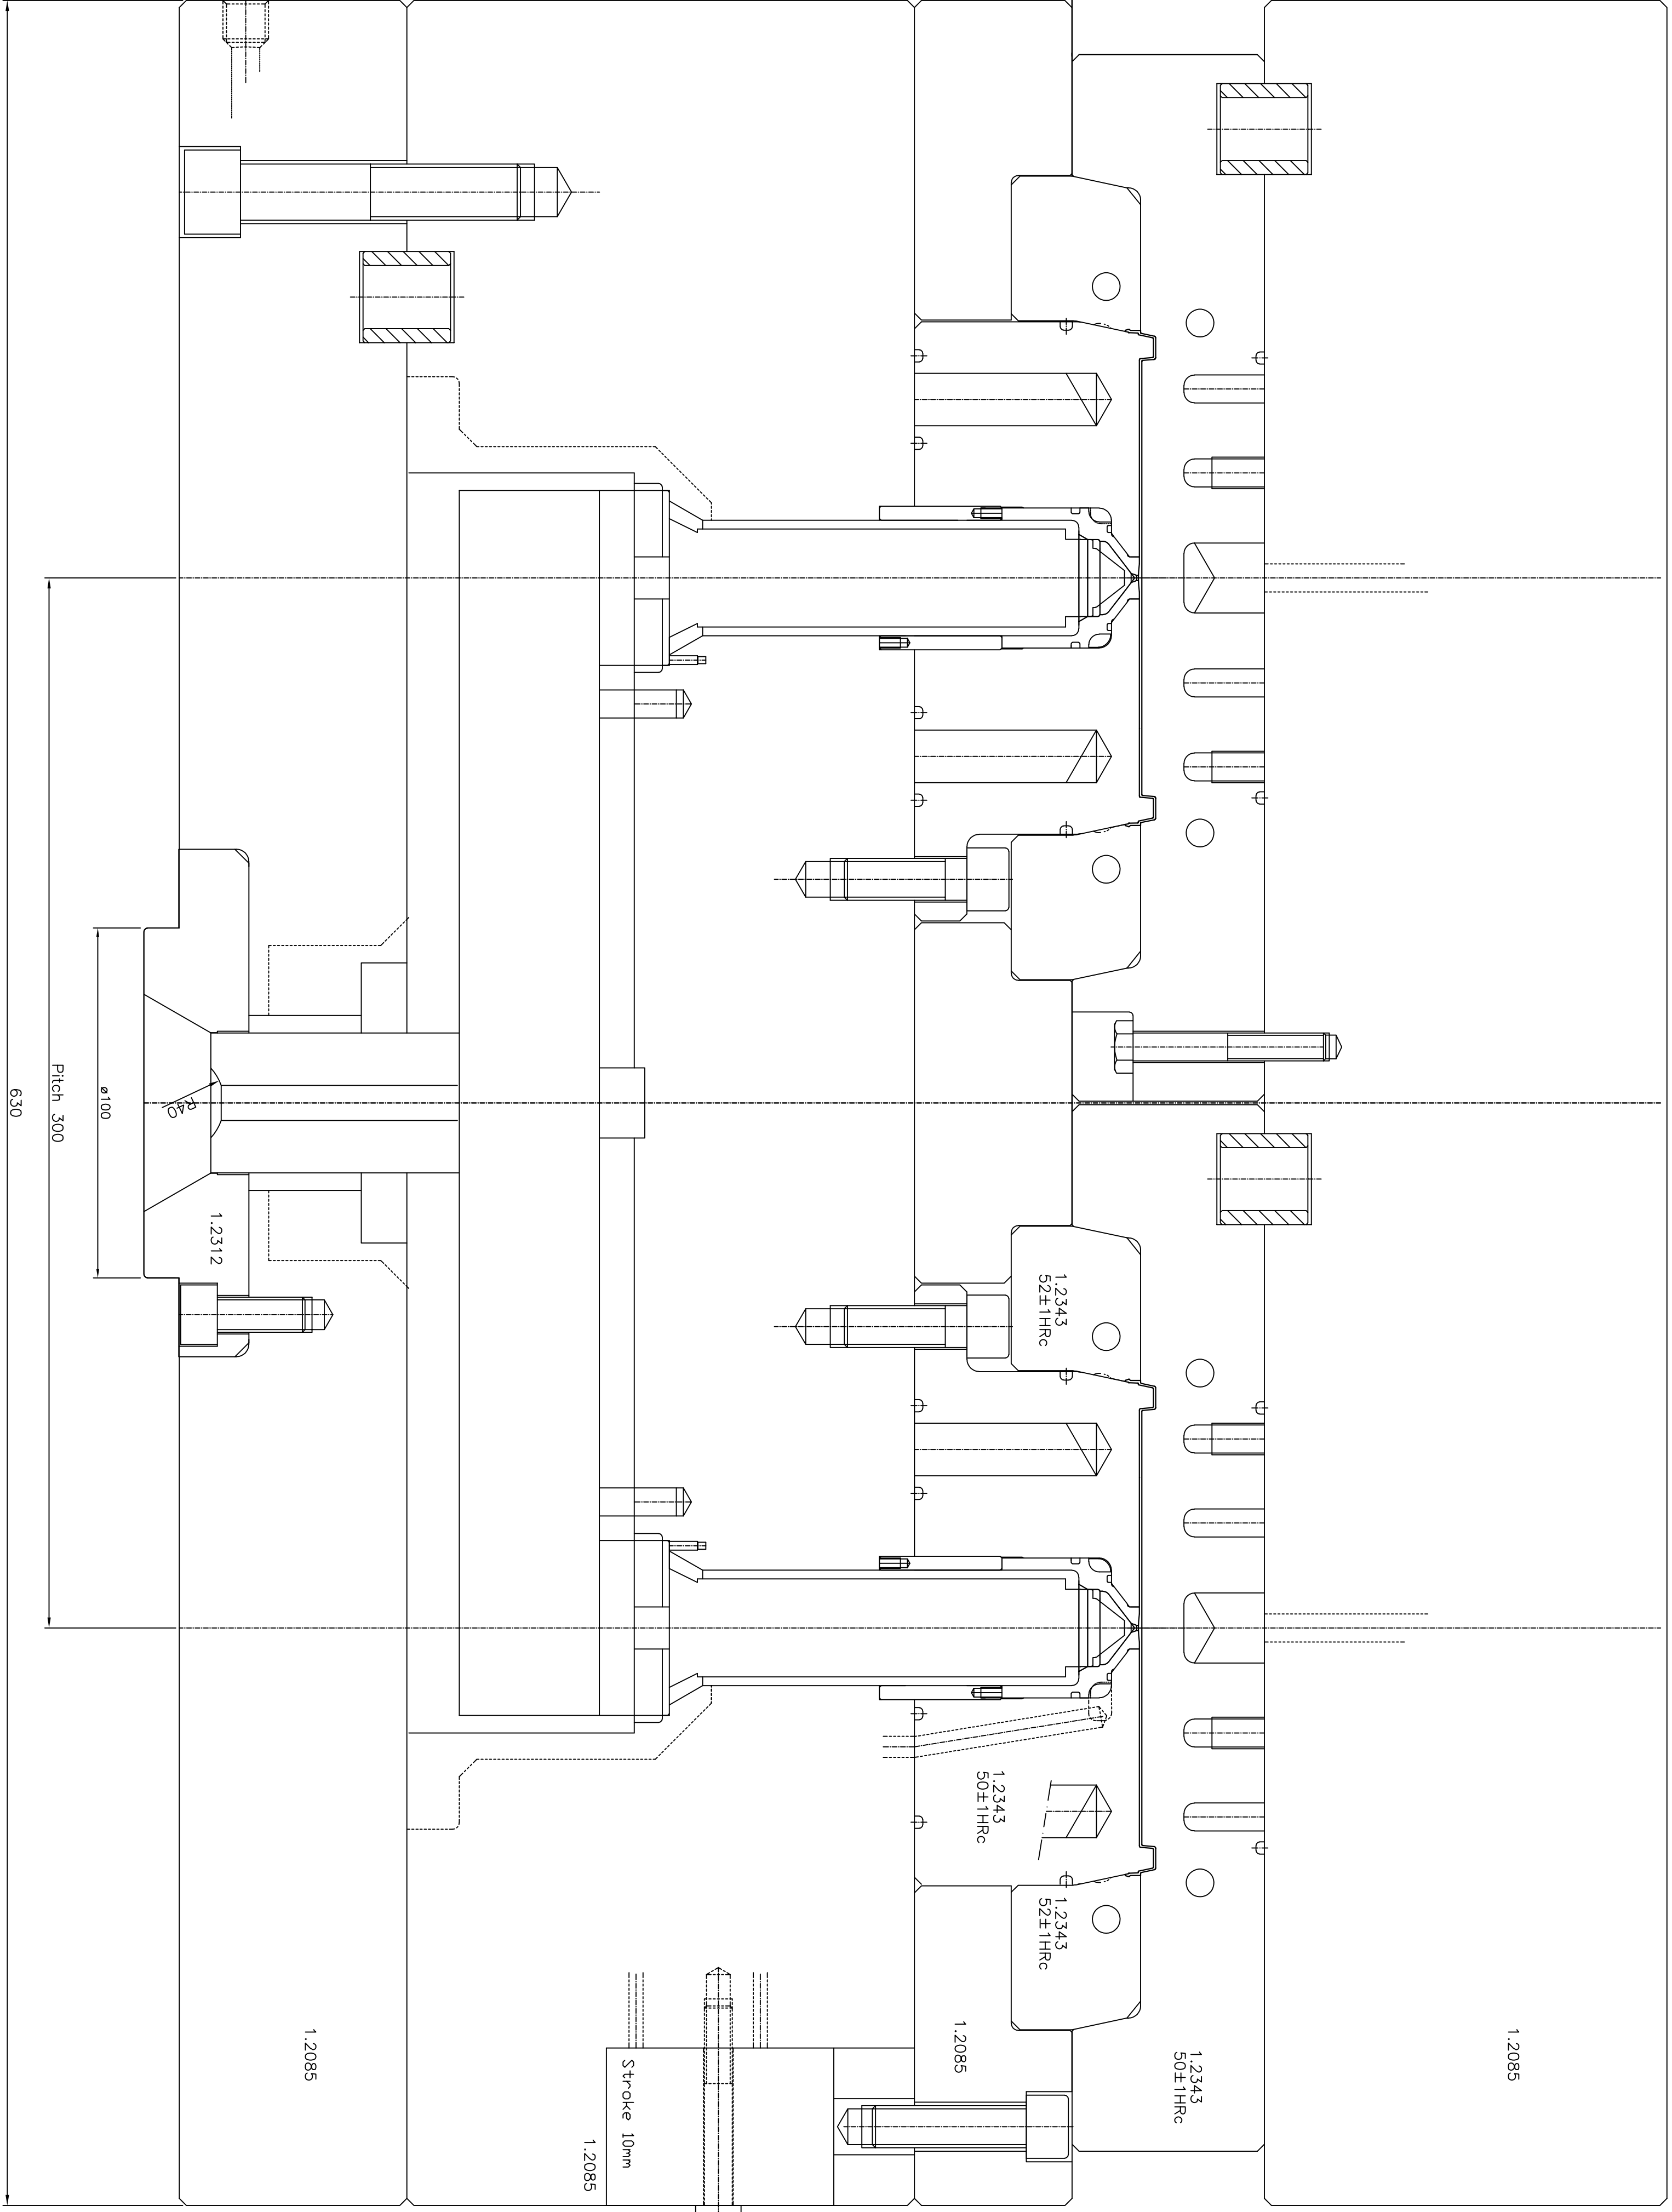

Engel e-motion 740/220T

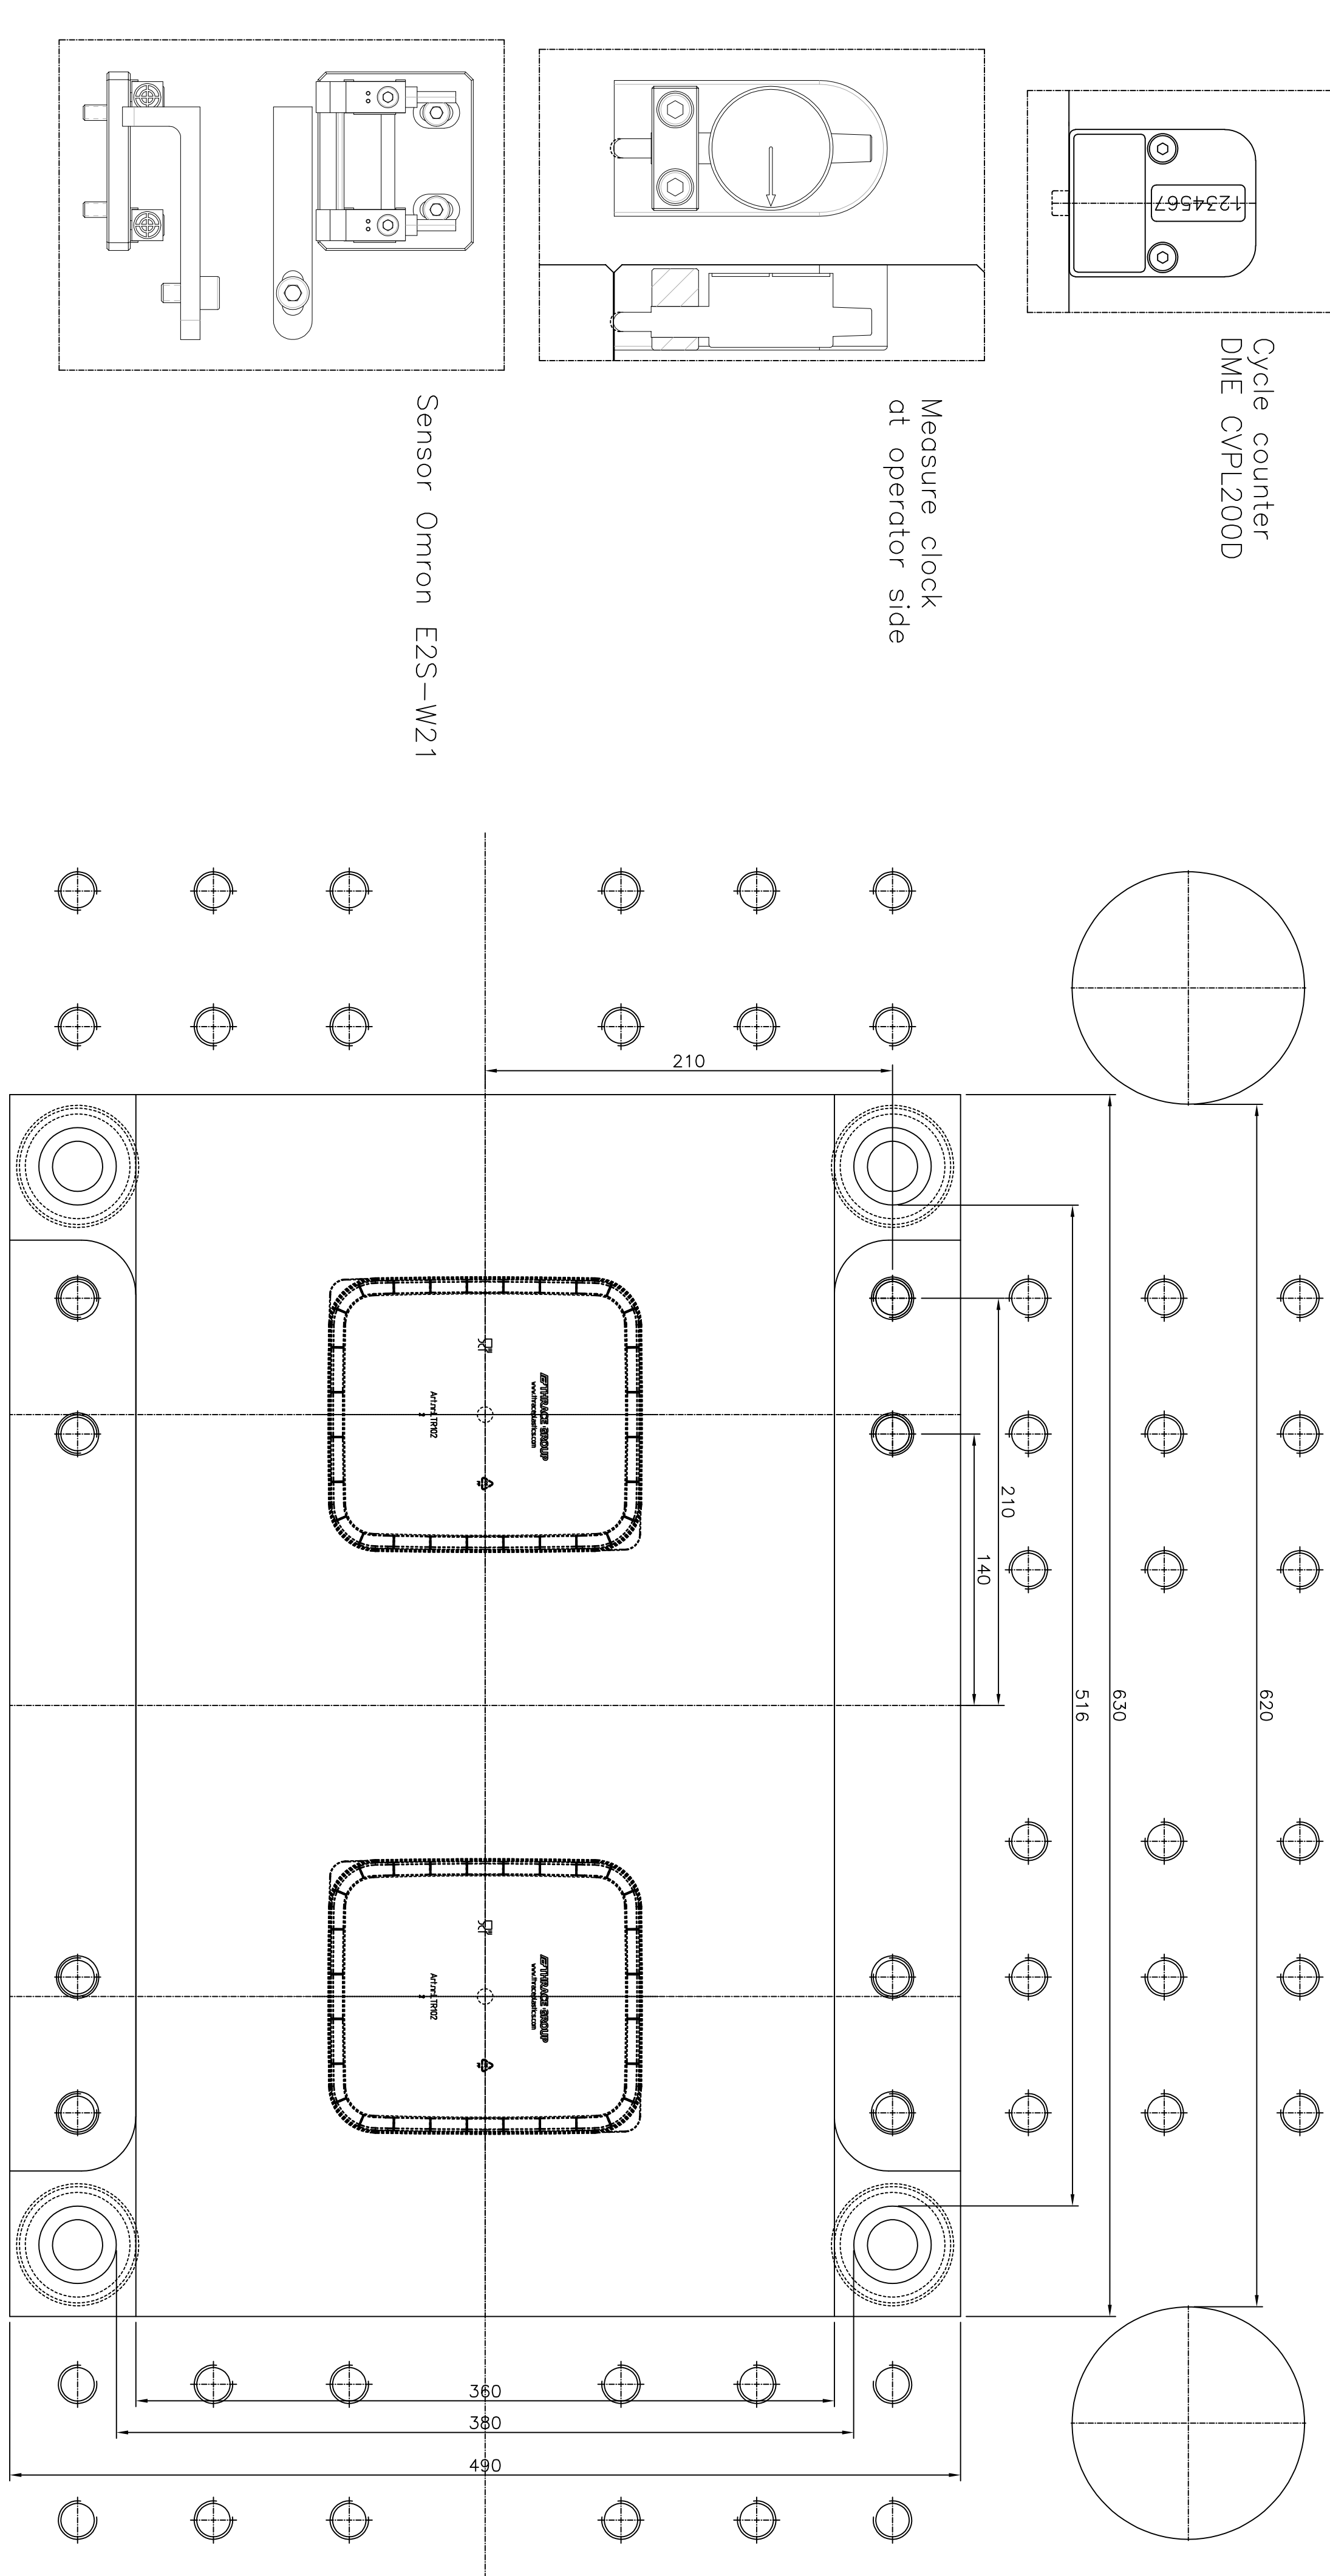

General information		Air connectors	
– Mouldheight	= ±425 mm	– Festo 1/4"G 8mm	
– Pitch	= 300 mm	– Position: Top & (non) operator side	
– Mould dimensions	= 490x 630		
– Hotrunner zones	= 5	<u>Electrical Connectors</u>	
<u>Central cooling per Mould half</u>		1 connector for Heater:	
– 1x IN/OUT Fixed side		– Connectorhouse:	HAN E 16 pins 0930 016 0307
– 1x IN/OUT Movable side		– Insert male:	HAN E 16 pins 0933 016 2601
– 1 1/2"G Kamlock		1 connector for Thermocouple:	
– Hosco Z81/R13/1/4"G separate for coolingbushes		– Connectorhouse:	HAN A 16 pins 0920 016 0301
– Position: Bottom		– Insert female:	HAN A 16 pins 0920 016 2812
<u>Hydraulic connector</u>		– Position: Top	
– Voss 1/4" G (for pipe ø8)			
– Position: Non-operatorside or Bottom			

Concept draft, do not use for production

Engineer: Nils H.	Material: –	Quantity: –	Technical drawing: –
Date: 22-04-2019	Revision: 1,0X Shrinkage		
Project: Moulding-1		Client: Thence Ipomo od	
Product: 1,5ltr 2cov lid rei bulgarian tea		Order No: A190031	Sheet: 000
BRINK		Horskamp Holland	
Horskamp Holland		Horskamp Holland	