




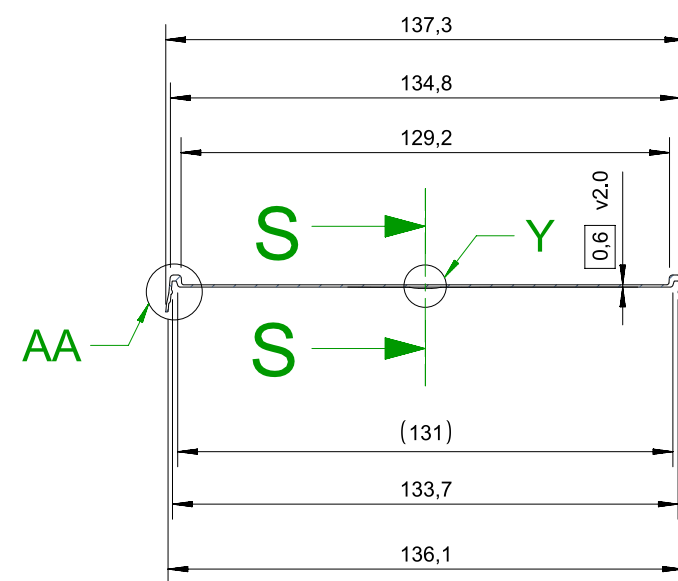


WIDTH  
SECTION R-R

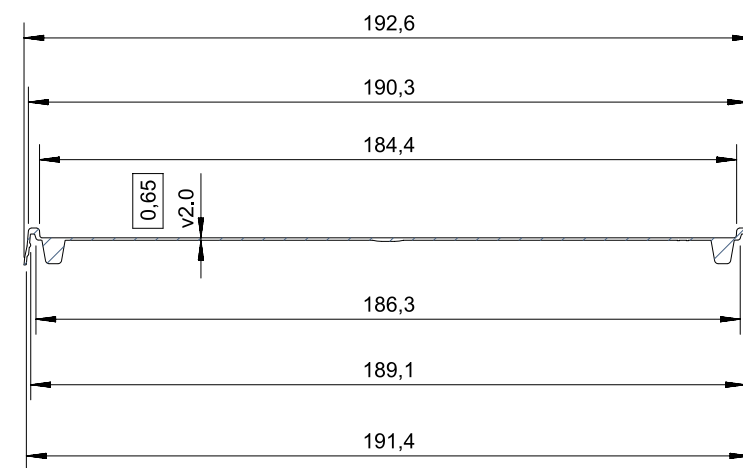




LENGTH  
SECTION S-S

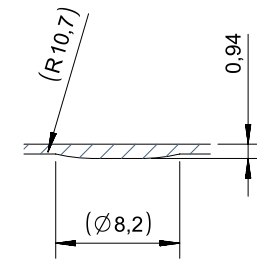


DETAIL Y  
SCALE 2:1

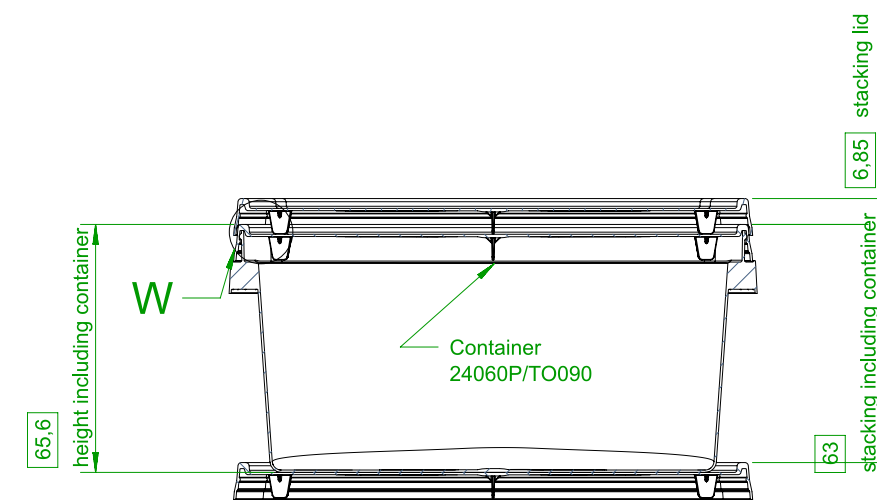


## STACKING VIEW WITH CONTAINER WIDTH

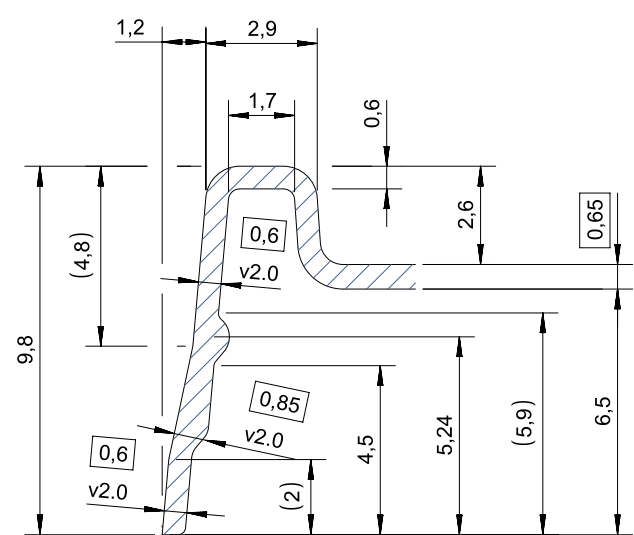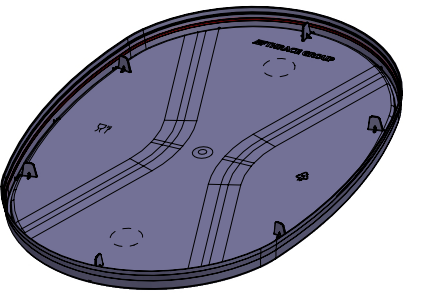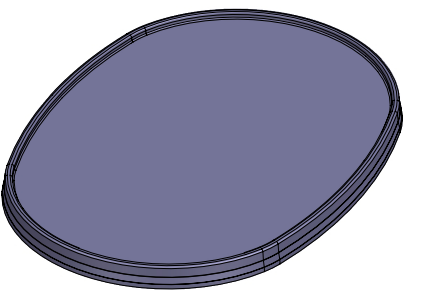

SECTION AB-AB 

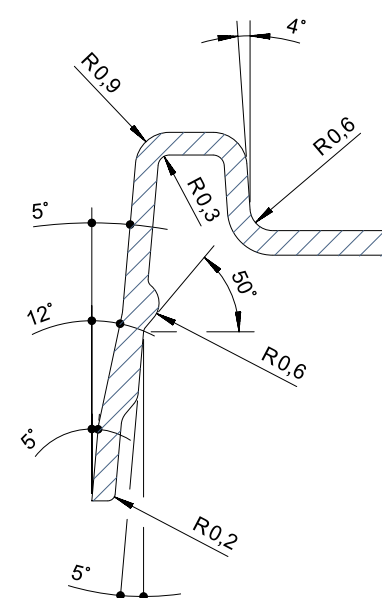


DETAIL AC

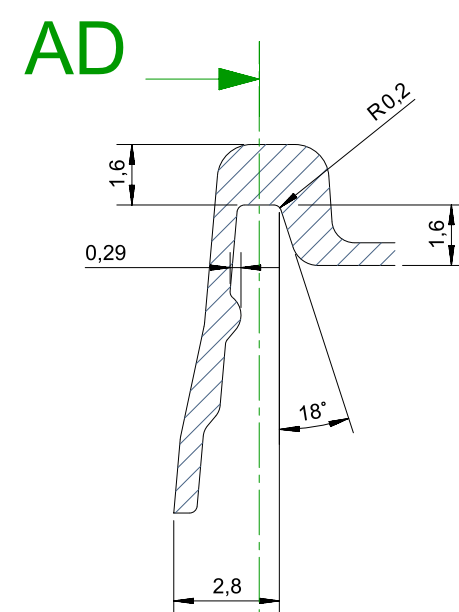


AD  


DETAIL AA  
SCALE 5:1

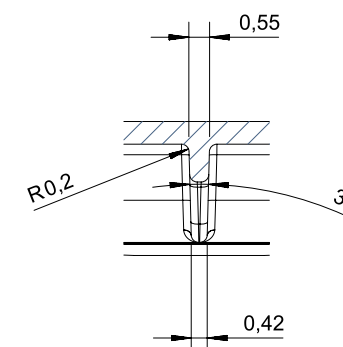


## SECTION AD-AD

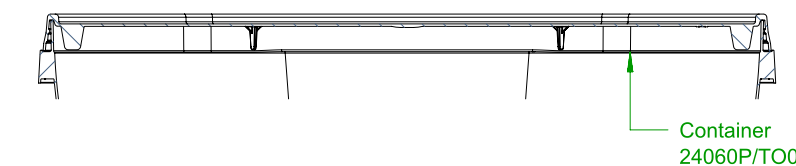


## STACKING VIEW WITH CONTAINER LENGTH

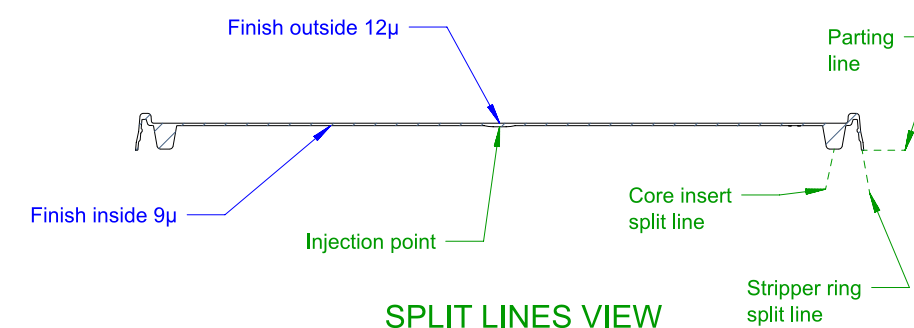


## SPLIT LINES VIEW

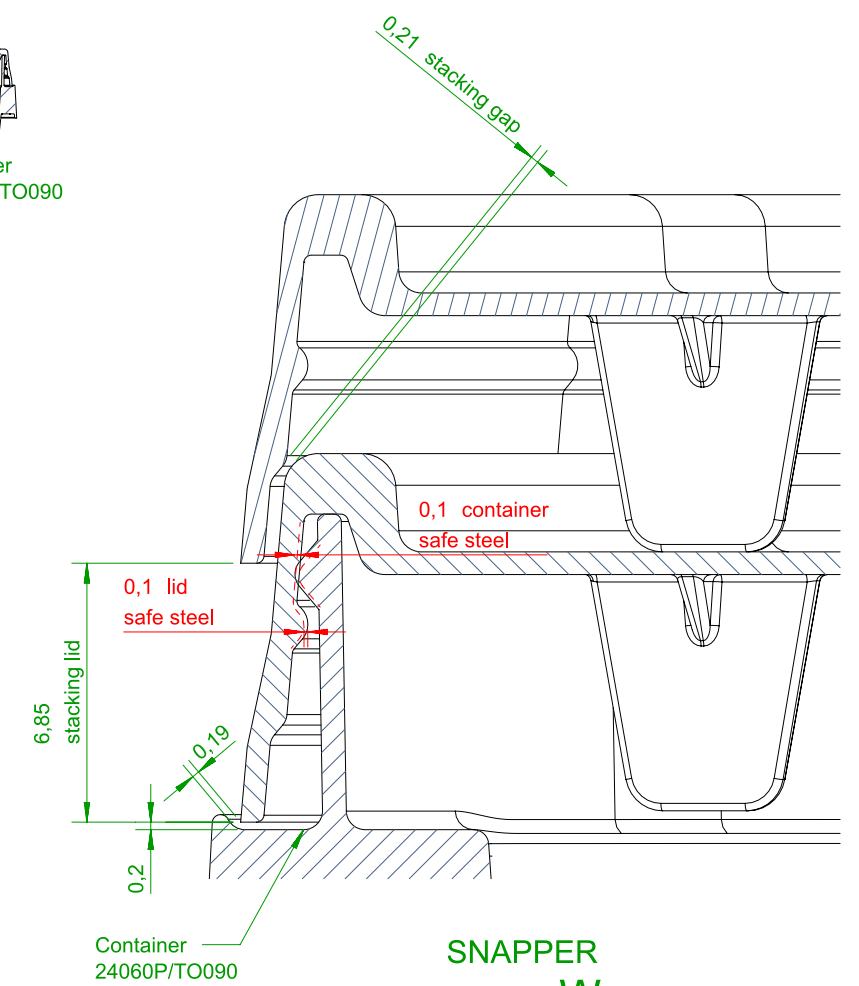


SNAPPER  
DETAIL W  
SCALE 5:1

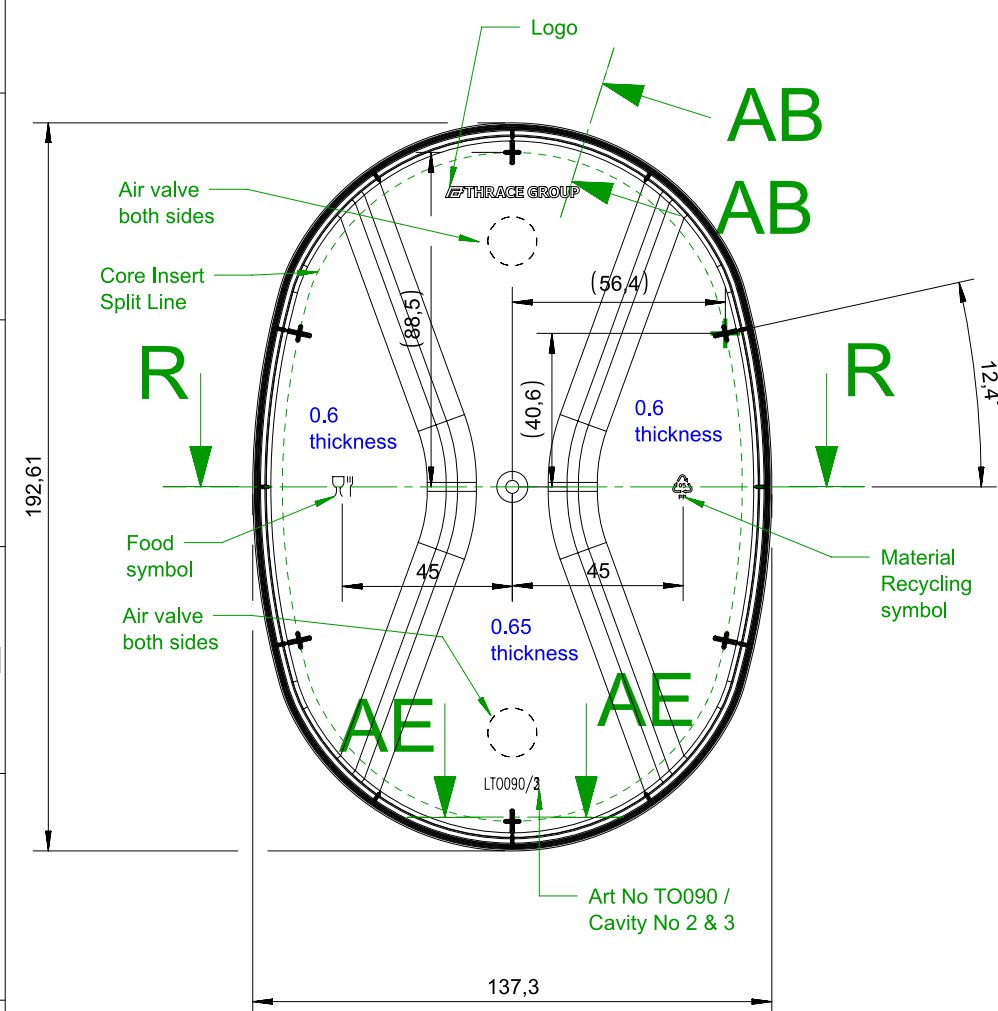


## INSIDE VIEW

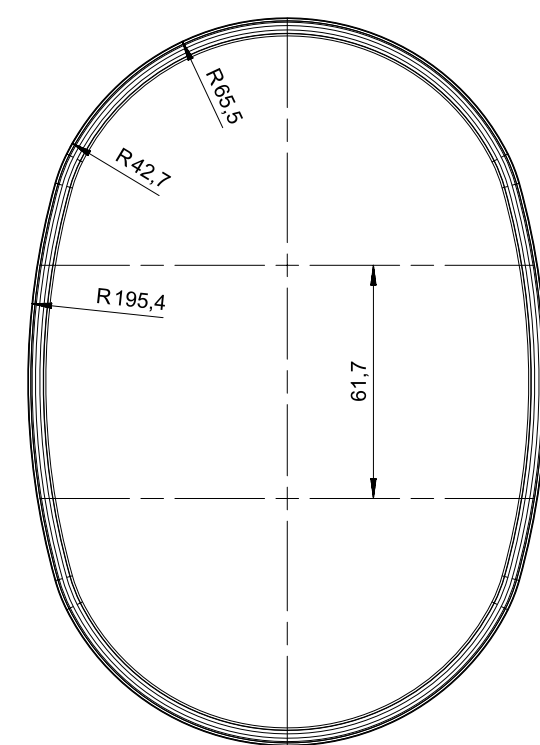

## OUTSIDE VIEW

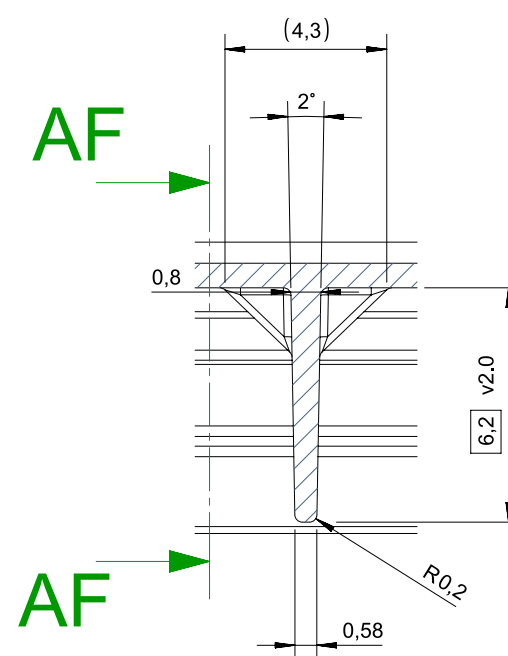


STACKING RIBS  
SECTION AE-AE  
SCALE 5:1

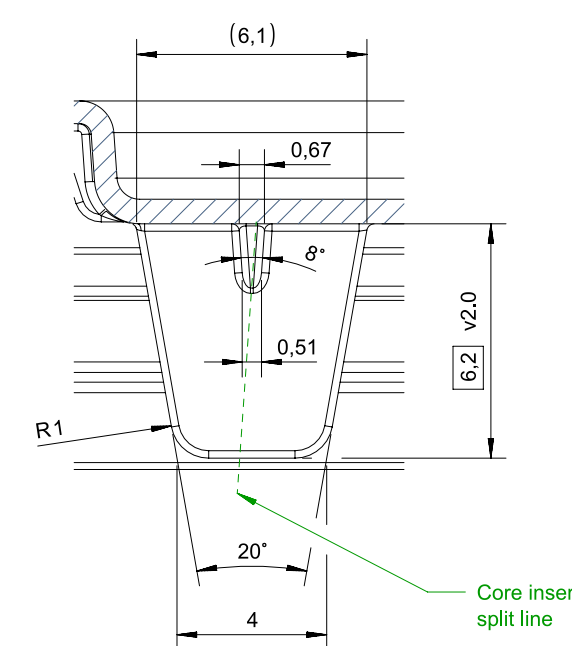

STACKING RIBS  
SECTION AF-AF

|                           |                      |                     |
|---------------------------|----------------------|---------------------|
| Test 1                    | Fit Lid on container |                     |
| Test 2                    | Interchangeable copy |                     |
| -                         | -                    |                     |
| -                         | -                    |                     |
| Finish Core (277 cm2)     |                      | 9μ                  |
| Finish Cavity (272 cm2)   |                      | 12μ                 |
| Flow Length (L)           |                      | 110                 |
| Thickness (T)             |                      | 0.55mm              |
| L/T Ratio                 |                      | 200                 |
| Weight Tolerance          |                      | +3%                 |
| Weight Cavity Differences |                      | +3%                 |
| Wall Thickness Tolerance  |                      | +5%                 |
| Wall Thickness Difference |                      | max. 0.03mm         |
| -                         |                      |                     |
| -                         |                      |                     |
| -                         |                      |                     |
| -                         |                      |                     |
| v2.0                      | 30/04/2024           | 9% weight reduction |
| v1.0                      | 29/03/2024           | Initial drawing     |
| Version No.               | Date                 | Description         |

|                                                                                                                             |                   |                                               |                |                                         |  |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|----------------|-----------------------------------------|--|
|  <b>BAZIGOS</b><br>Precision and Trust |                   | Order No.: 10456<br>Engineer: C. Salodimitris |                | Description:<br>Date: 30/04/2024        |  |
| Project<br>24061P                                                                                                           |                   | Customer<br>Thrace Ipoma                      |                | Tolerances otherwise specified<br>±0.5% |  |
| Product Name<br>900ml 2cav Lid Oval<br>LTO090                                                                               |                   |                                               | Units<br>mm    |                                         |  |
|                                        |                   |                                               |                |                                         |  |
| Material<br>PP                                                                                                              | Shrinkage<br>1.8% | Weight<br>15.79g (0.90g/100g)                 | Version<br>2.0 | Scale<br>1:2                            |  |