


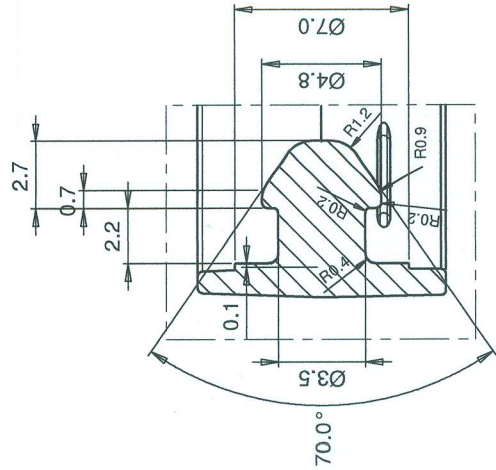
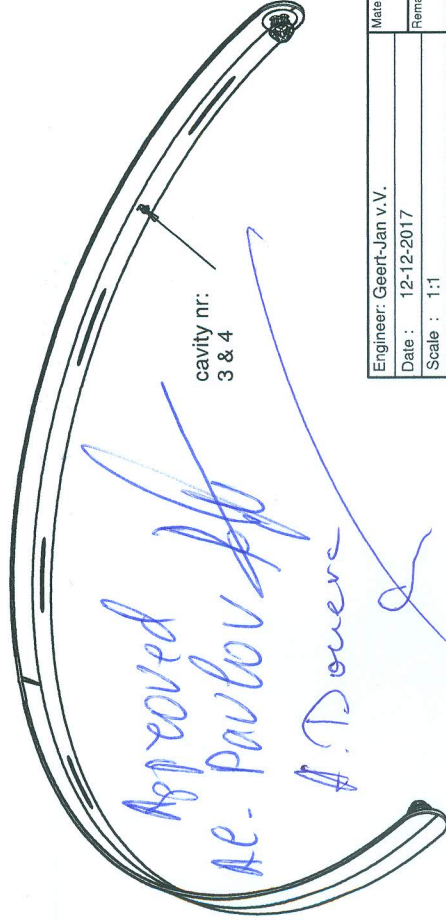

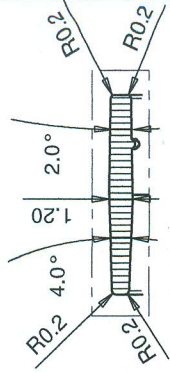

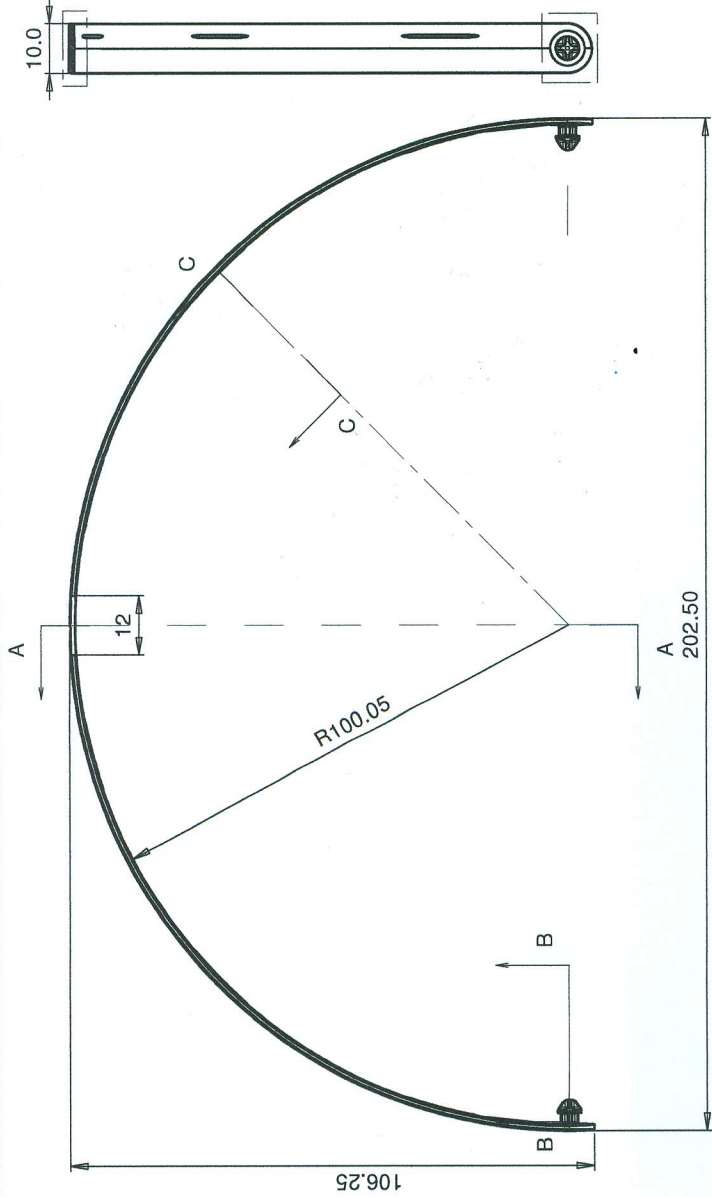

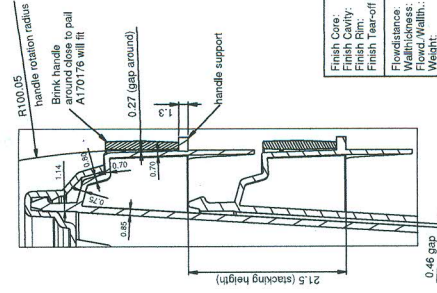
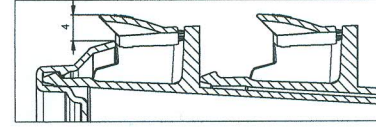


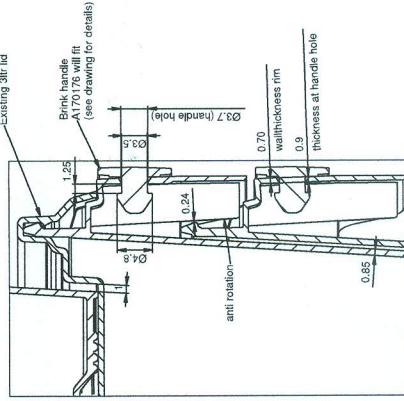

Finish Core:	VDI 3400 st24
Finish Cavity:	VDI 3400 st28
Finish Rim:	-
Finish Tear-off tab:	-
Flowdistance:	165 mm
Wallthickness:	1.2 mm
Flowd./Wallth.:	138
Weight:	3.3 gram
Contents:	-
Weight tolerance:	±0.18 gram
Weight differences:	0.18 gram
Wallthickness tolerance:	±3 %
Wallthickness difference:	0.04 mm

Engineer: Geert-Jan v.V.	Material: PP (type to be specified)	Tolerances (not specified): ±0.5%
Date: 12-12-2017	Remarks:	
Scale: 1:1		
Project: Product drawing-v1		
3ltr 2cav handle rnd		
	Client: Thrace - Ipoma ad	
	Drawing no.: A170176	
	Projection: Units: mm	
	Harskamp Holland	
	Tel: (31)318-465500 Web: www.brinkbv.com	

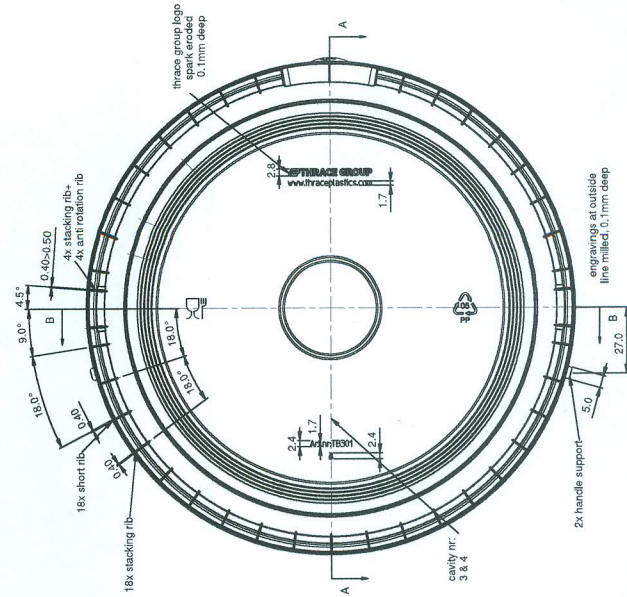

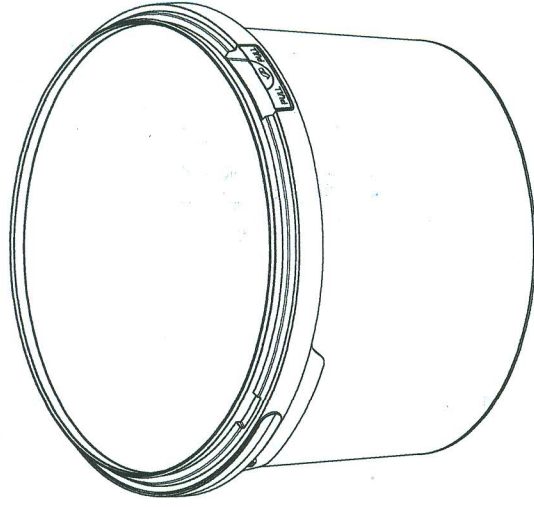

Finish Core:	VDB 7 Mirror 9u
Finish CoreV:	VDB 8 Mirror 3u
Finish CoreH:	VDB 8 Mirror 3u
Finish Tear-off lab:	VDB 8 Mirror 3u
Flange thickness:	544 mm
Wall thickness:	0.85 mm
Flange Width:	287
Weight:	352.0 gram
Content:	3917mm Emerald, 3000mm $\pm$ 12mm under topsurface pall
Weight tolerance:	$\pm$ 0.96 gram
Weight differences:	0.96 gram
Weight differences:	0.96 gram
Wall thickness difference:	0.04 mm

Engineer: Gaur-Jay V.V.	Material: pvc (type to be specified)	Accessories: see page 12
Date: 15-12-2017	Scale: 1:1	
Project: Product drawing of	Client:	
31W 2cav rail rnd		
 Harskamp Holland tel 0318 631 200 - fax 0318 631 400 info@wvbrink.com		 ISO 9001:2015 ISO 14001:2015
Thruax - Ipmalad		A17015

Approved 
J. Pavlov
ST-22-2012
A. Doreva