

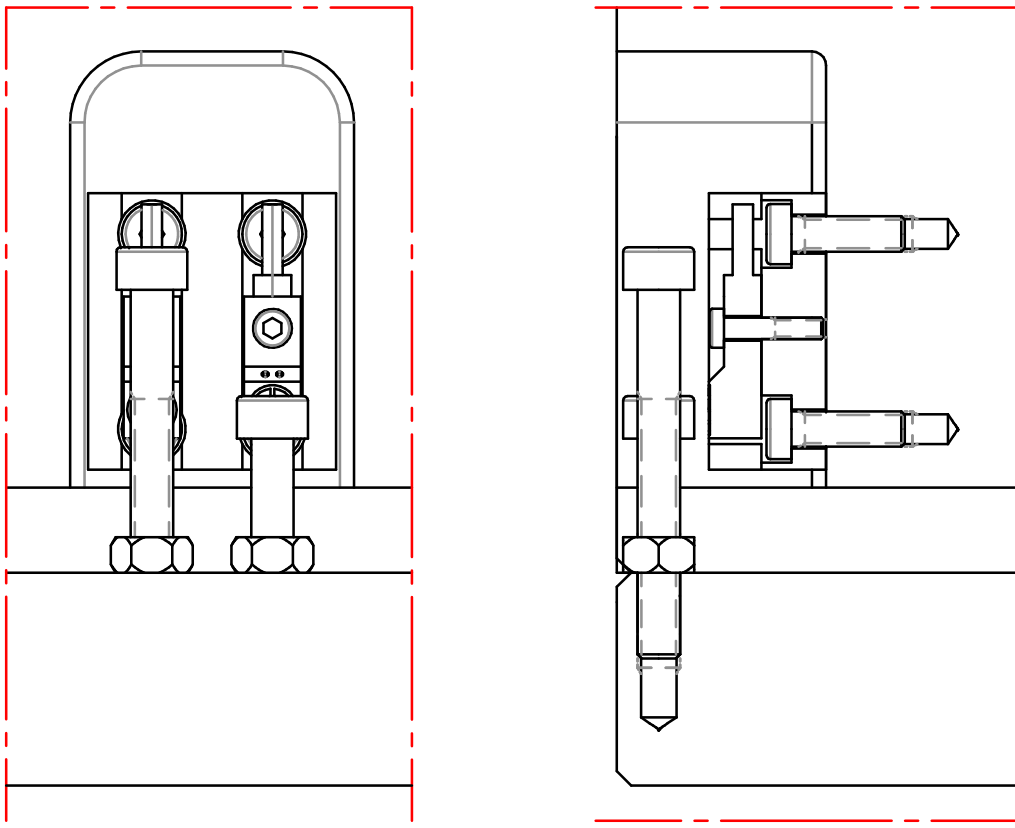


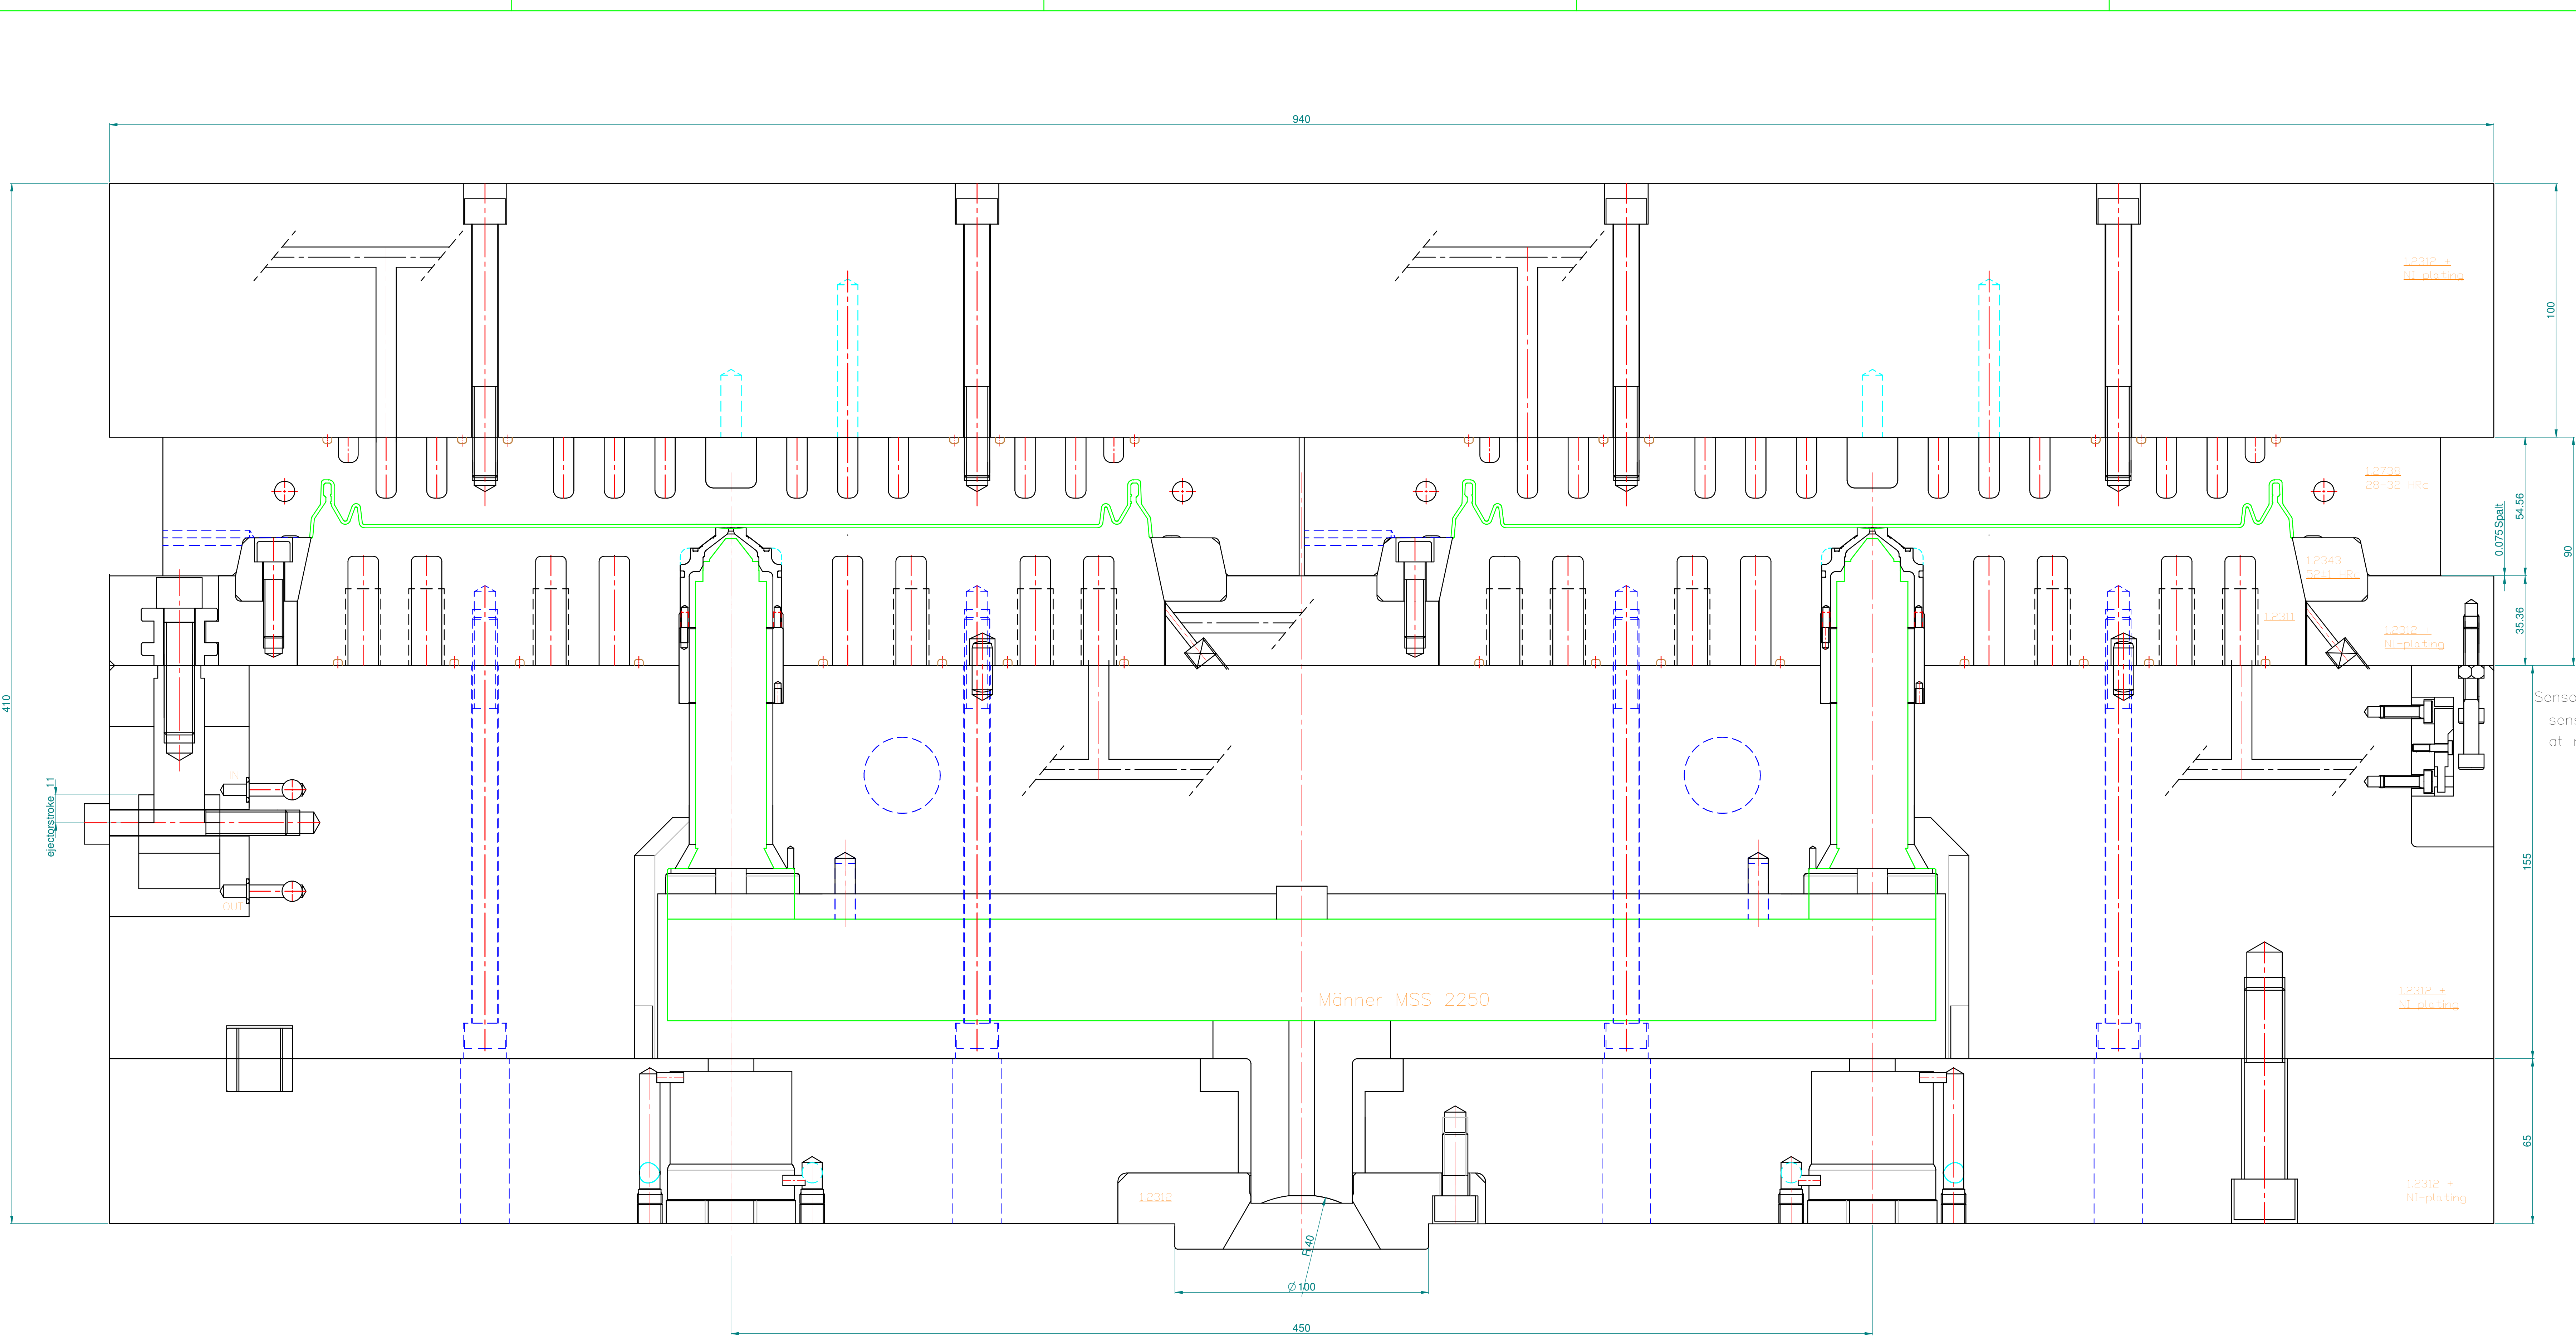


Sensor Omron E2S-W21
Non operator side

Sensor Omron E2S-W21
sensors ejectionplate
at non-operator side

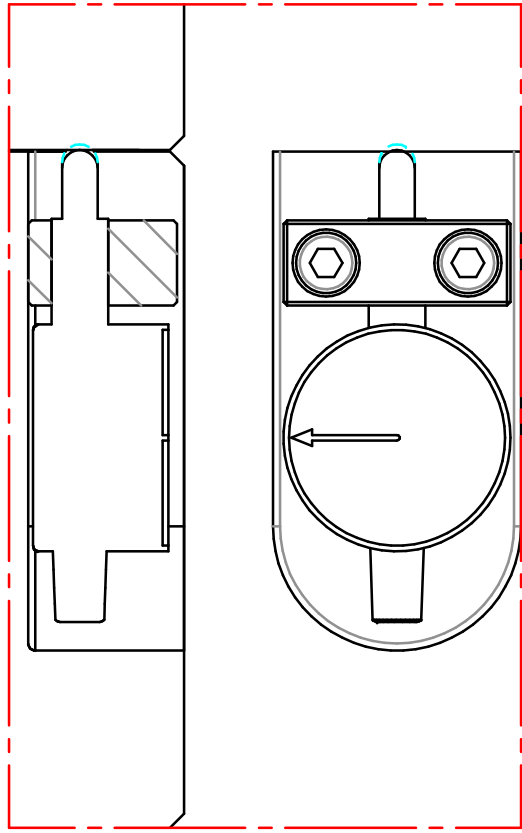

Measure clock
at operator side

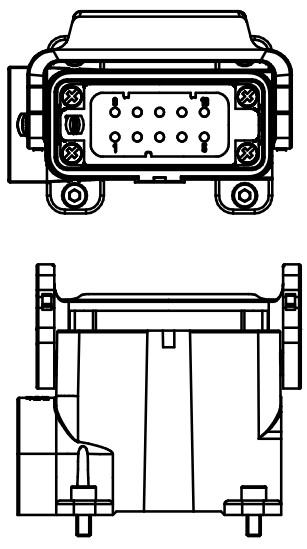

PLUGHOUSING for detection sensors
ejectionplate with HARTING connector:
(on top / non operator side)

Connectorhouse:
1920 010 0251
Insert male: HAN A 10 pins
0920 010 2612

Cooling:
-Central cooling (if possible, internal)
-Kamlock $1\frac{1}{2}$ "G
-Hasco $\frac{1}{4}$ " G" Z-81-13-R1-4 (for Nozzle)
-Under
-not countersunk

Air:
-Festo QS- $\frac{1}{4}$ "G - Ø8
-Top, non-operator side, operator side
-not countersunk

Hydraulic:
-Voss $\frac{1}{4}$ "G
-Under, non-operator side
-not countersunk

Thermocouple
-Harting Han 16A
-Base housing: 09 20 016 0301
-Female insert: 09 20 016 2812

Heater
-Harting Han 16E
-Base housing: 09 30 016 0307
-Male insert: 09 33 016 2601

Concept drawing, don't
use for production.

			0822.1372.2	
			Sheet 1; 2 sheets	
<u>Author:</u>	MG	<u>See drawing</u>	<u>1</u>	<u>Sheet</u>
<u>Date:</u>	23-11-2017	<u>Shrink is 1.8%</u>		<u>1</u>
<u>Project:</u>	111			<u>2</u>
<u>Assembly</u>				<u>3</u>
2cav_18ltr_Lid_Round		Thrace Iploma		
BRINK Harskamp, Holland		A170169 00A		
http://www.brink-holland.com				