

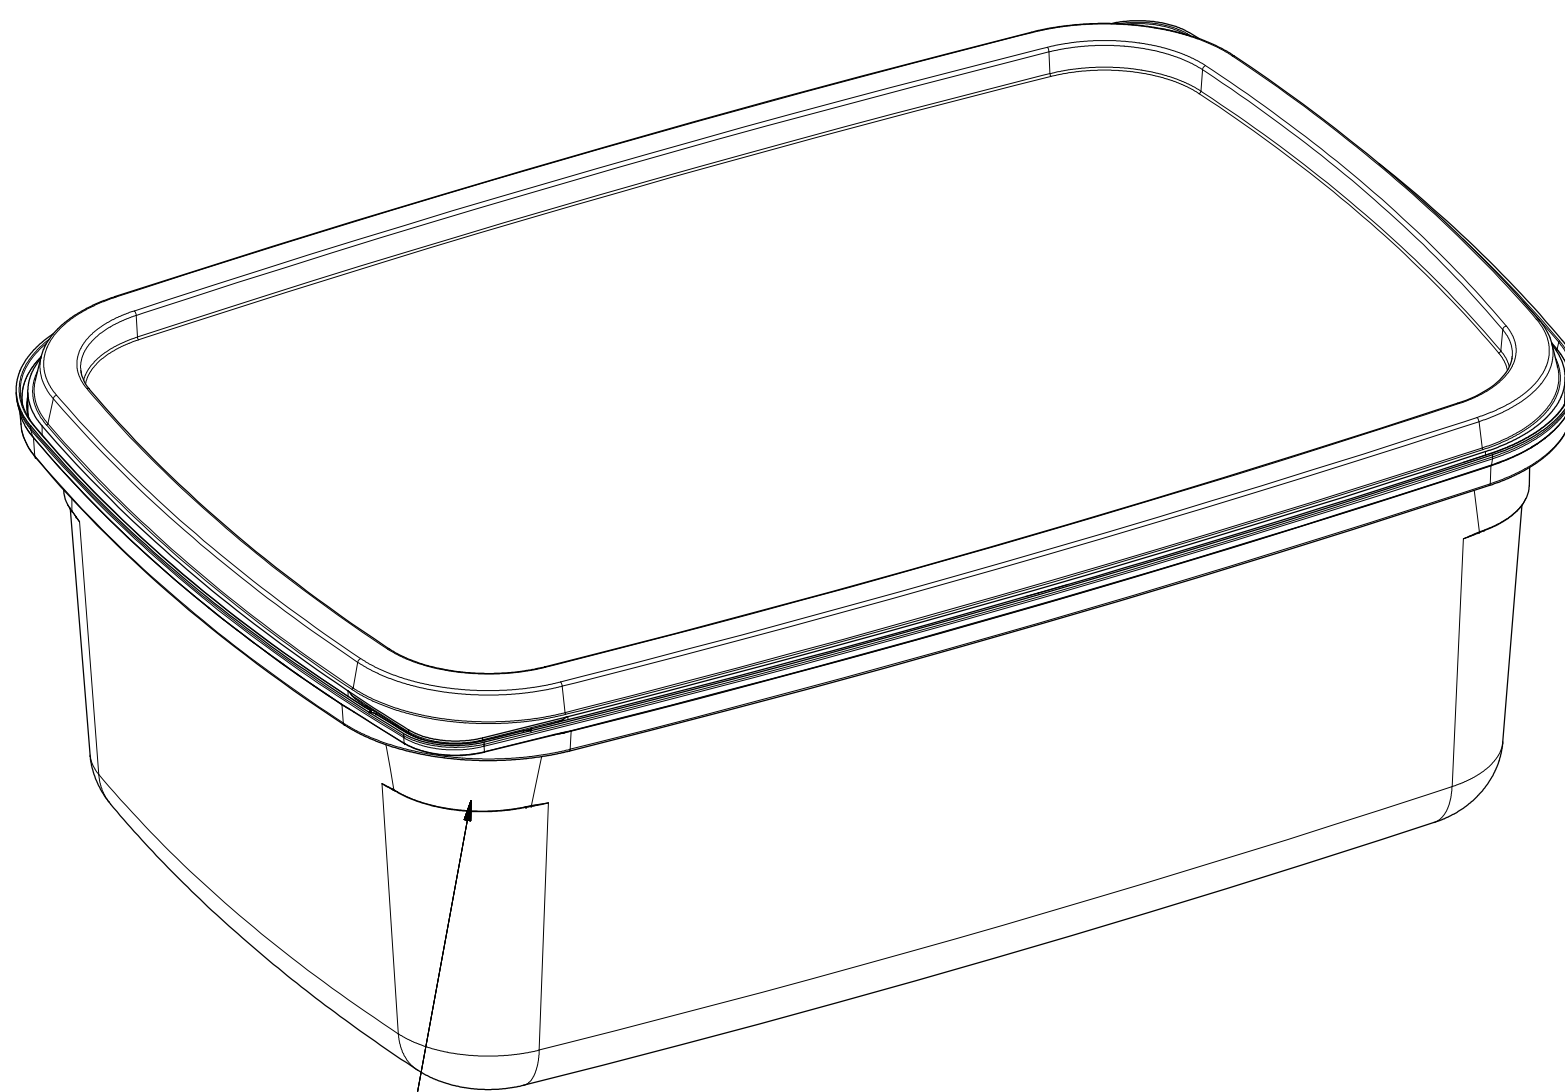
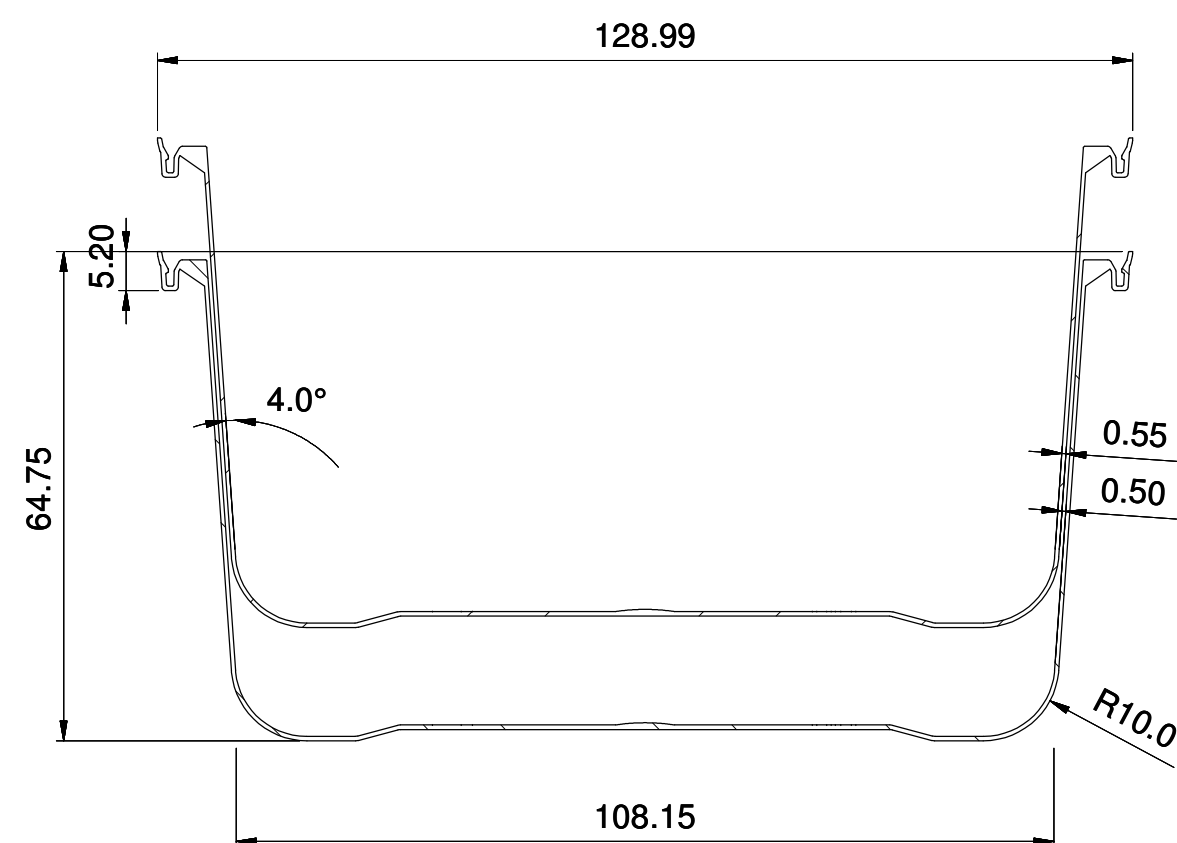
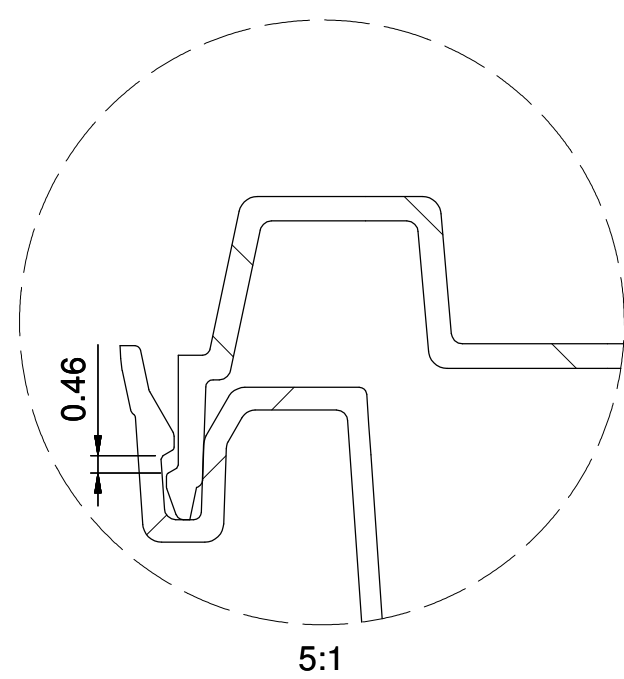
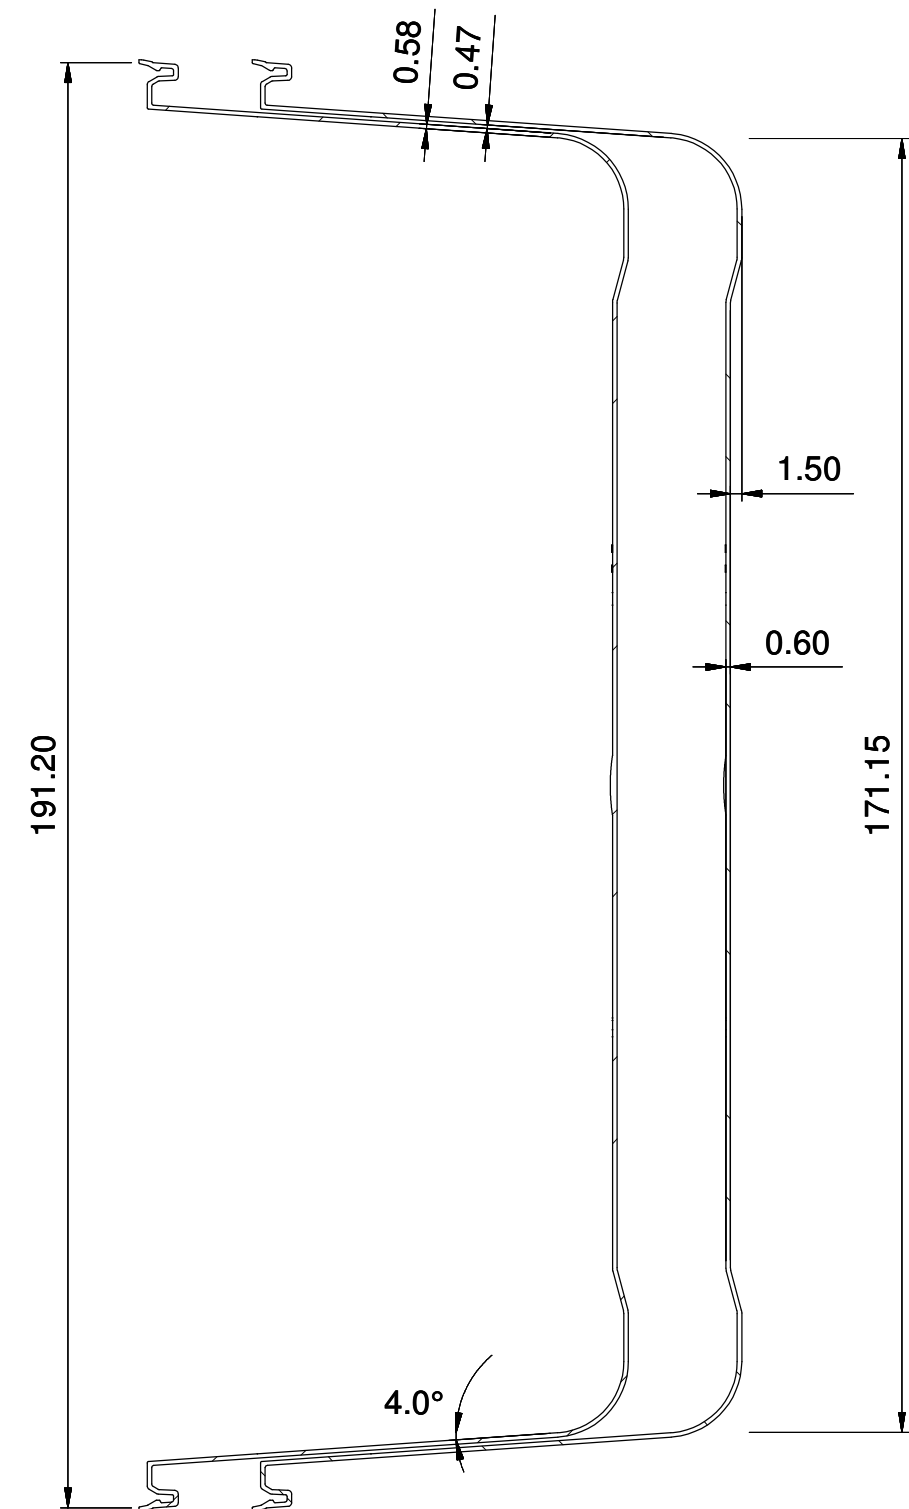


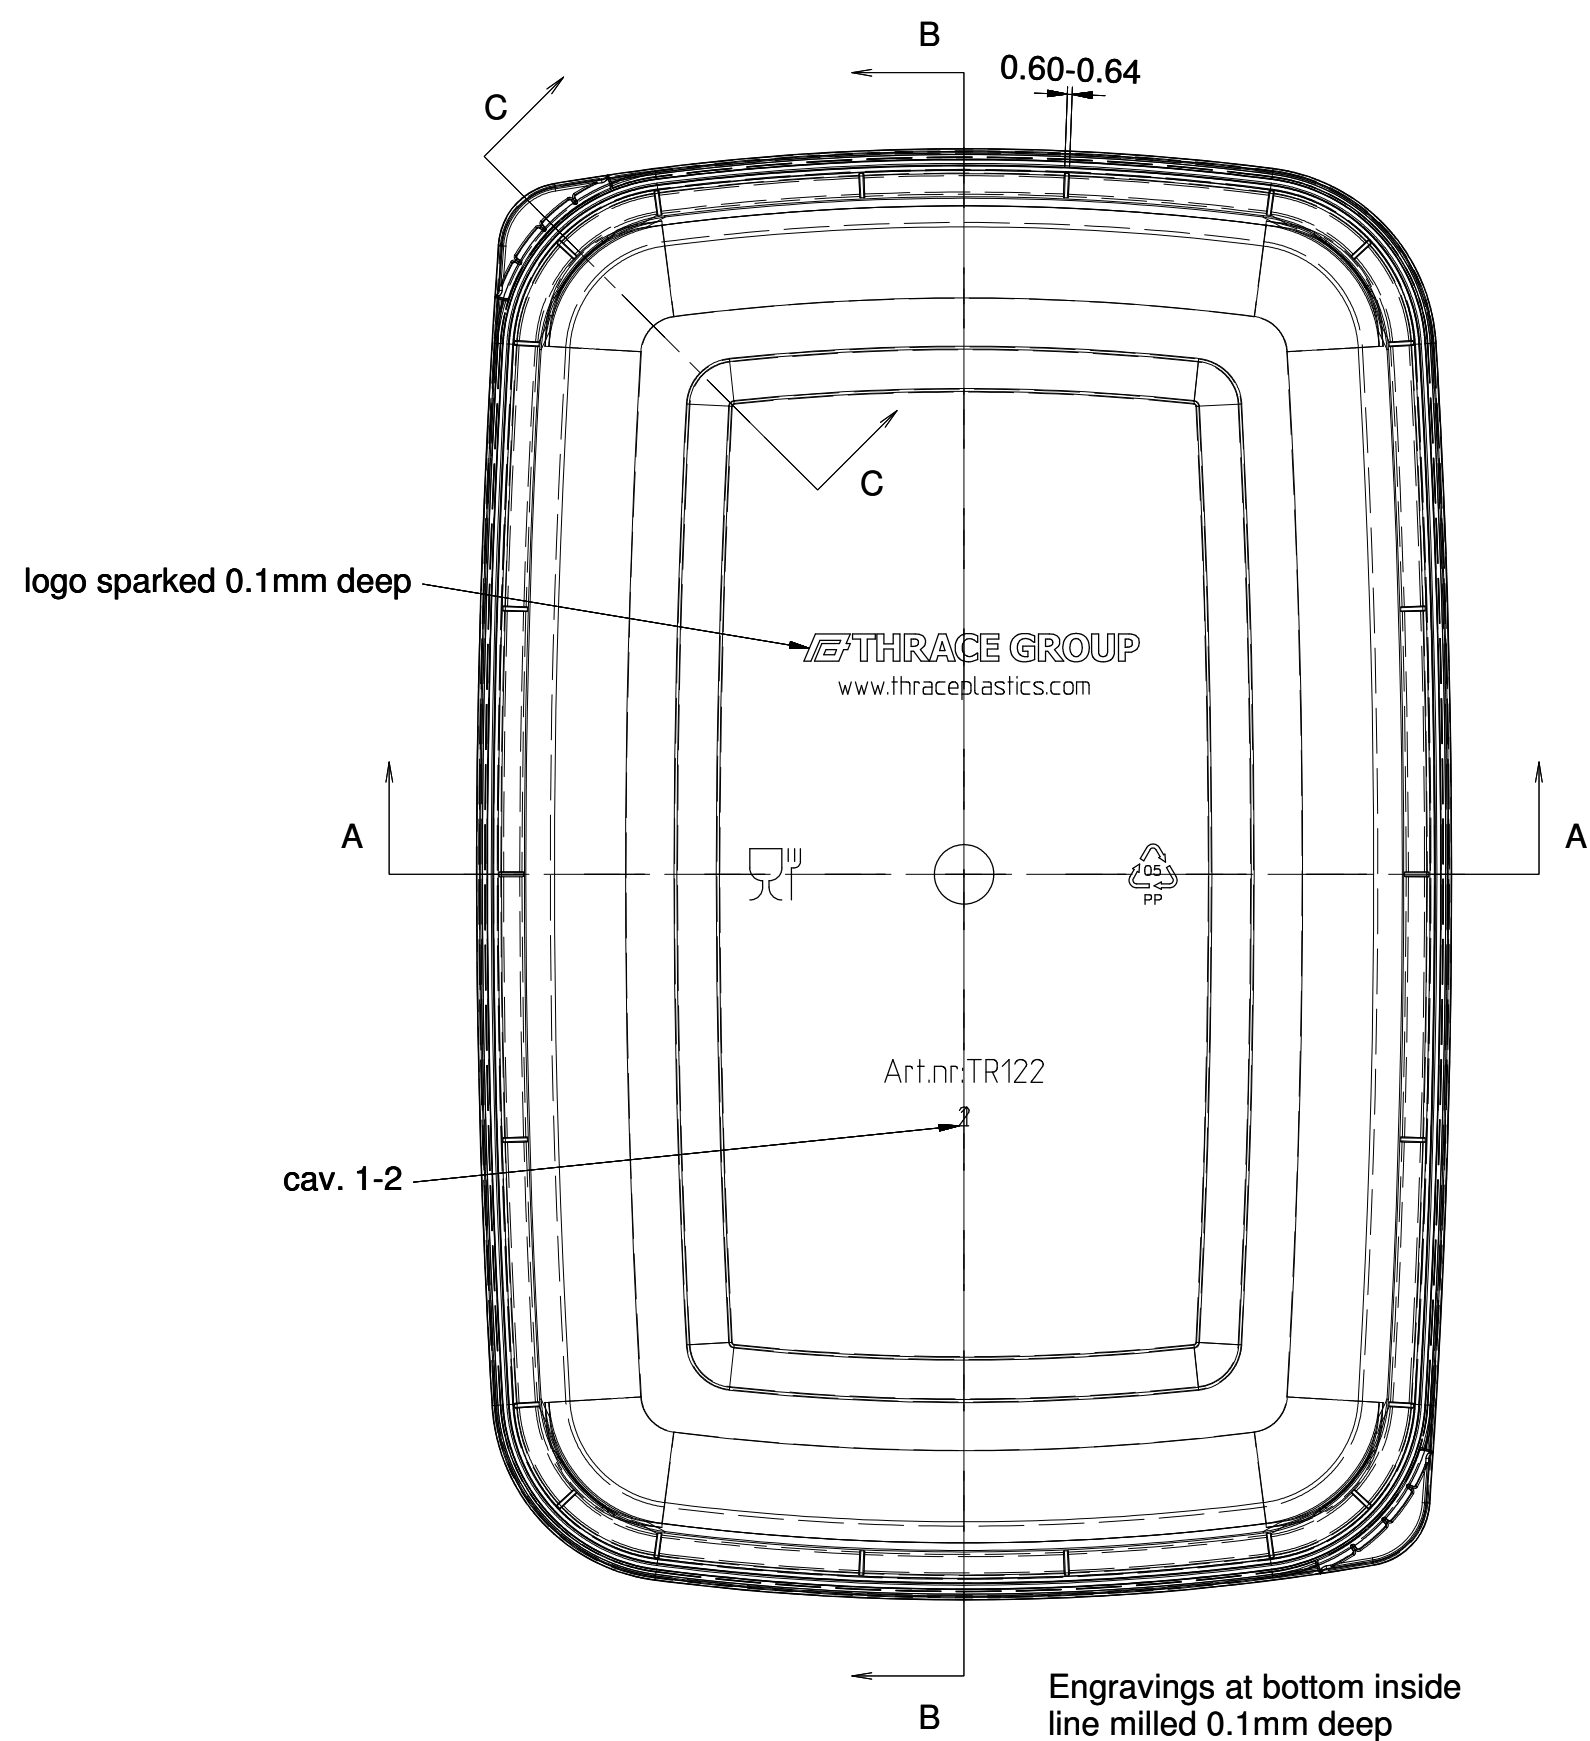

required height for stacking,
no need to make narrower because of 3-sided IML

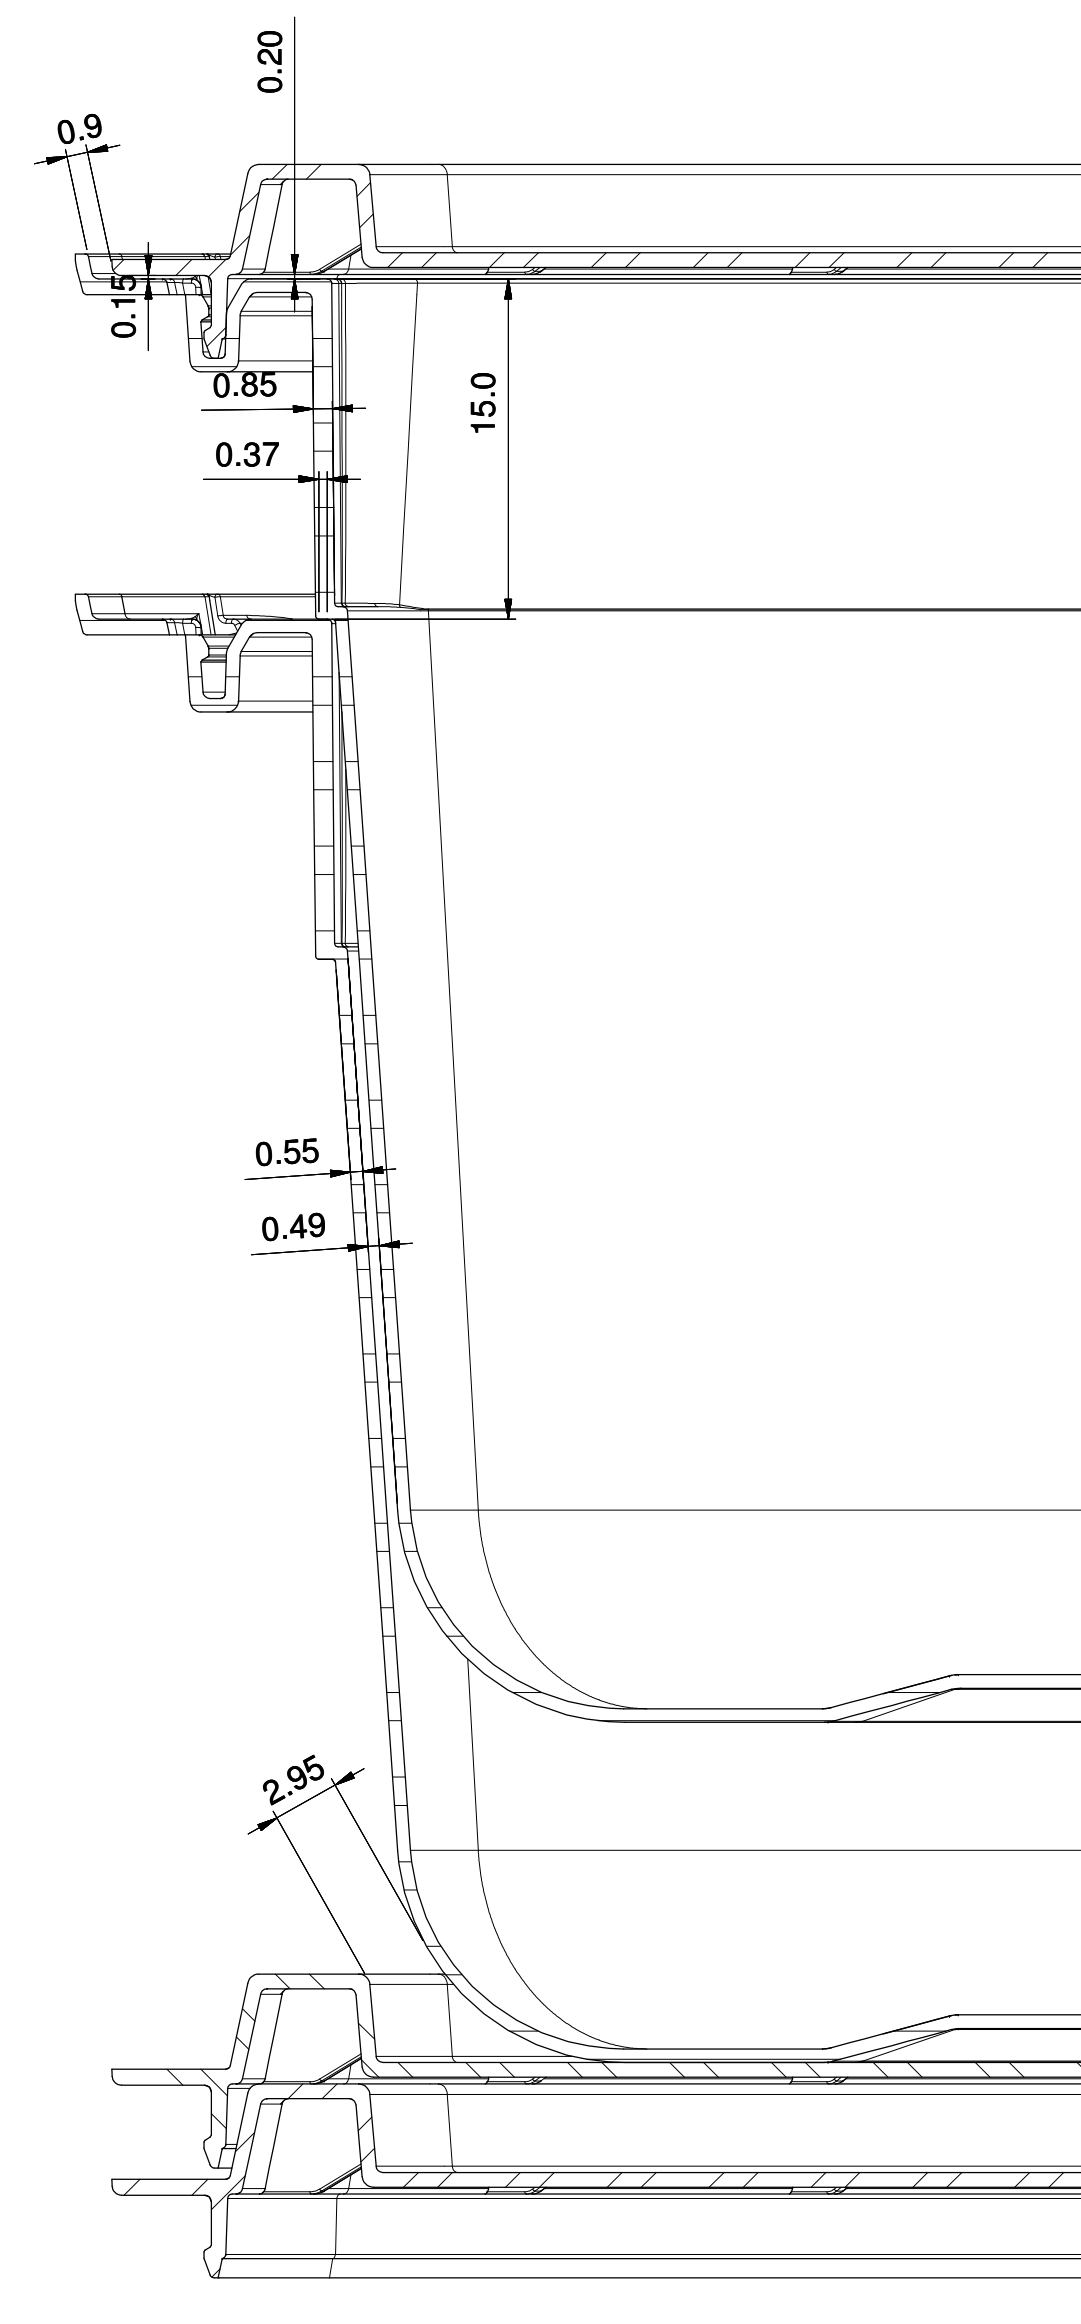

C-C | 3:1

Finish Core:	VDB #7 (Mirror 9μ)	
Finish Cavity:	VDB #8 (Mirror 3μ)	
Finish Rim:	VDB #7	
Finish Tear-off tab:	VDB #7	
Flowdistance:	168 mm	A190028 (Bazigos)
Wallthickness:	0.55 mm	
Flowd./Wallth.:	305	
Weight:	30.6 gram (36.5 gram)	
Contents:	1154 mL (1191 mL)	
Watertight:	Yes 24h	
Weight tolerance:	± 0.56 gram	
Weight differences:	0.56 gram	
Wallthickness tolerance:	± 5 %	
Wallthickness difference:	0.03 mm	

Engineer: Bob Vandevliet	Material: Please specify	Tolerances if not specified: ±0.5%
Date : 2019-05-22	Remarks: -	
Scale : 1:1		
Project: Product-1ltr 2cav container rct-v5 1ltr 2cav container rct	Client: THRACE - IPOMA AD	
BRINK Harskamp Holland Tel: (31)318-452500 Web: www.brinkbv.com	Projection: Units: mm	Drawing no.: A190028