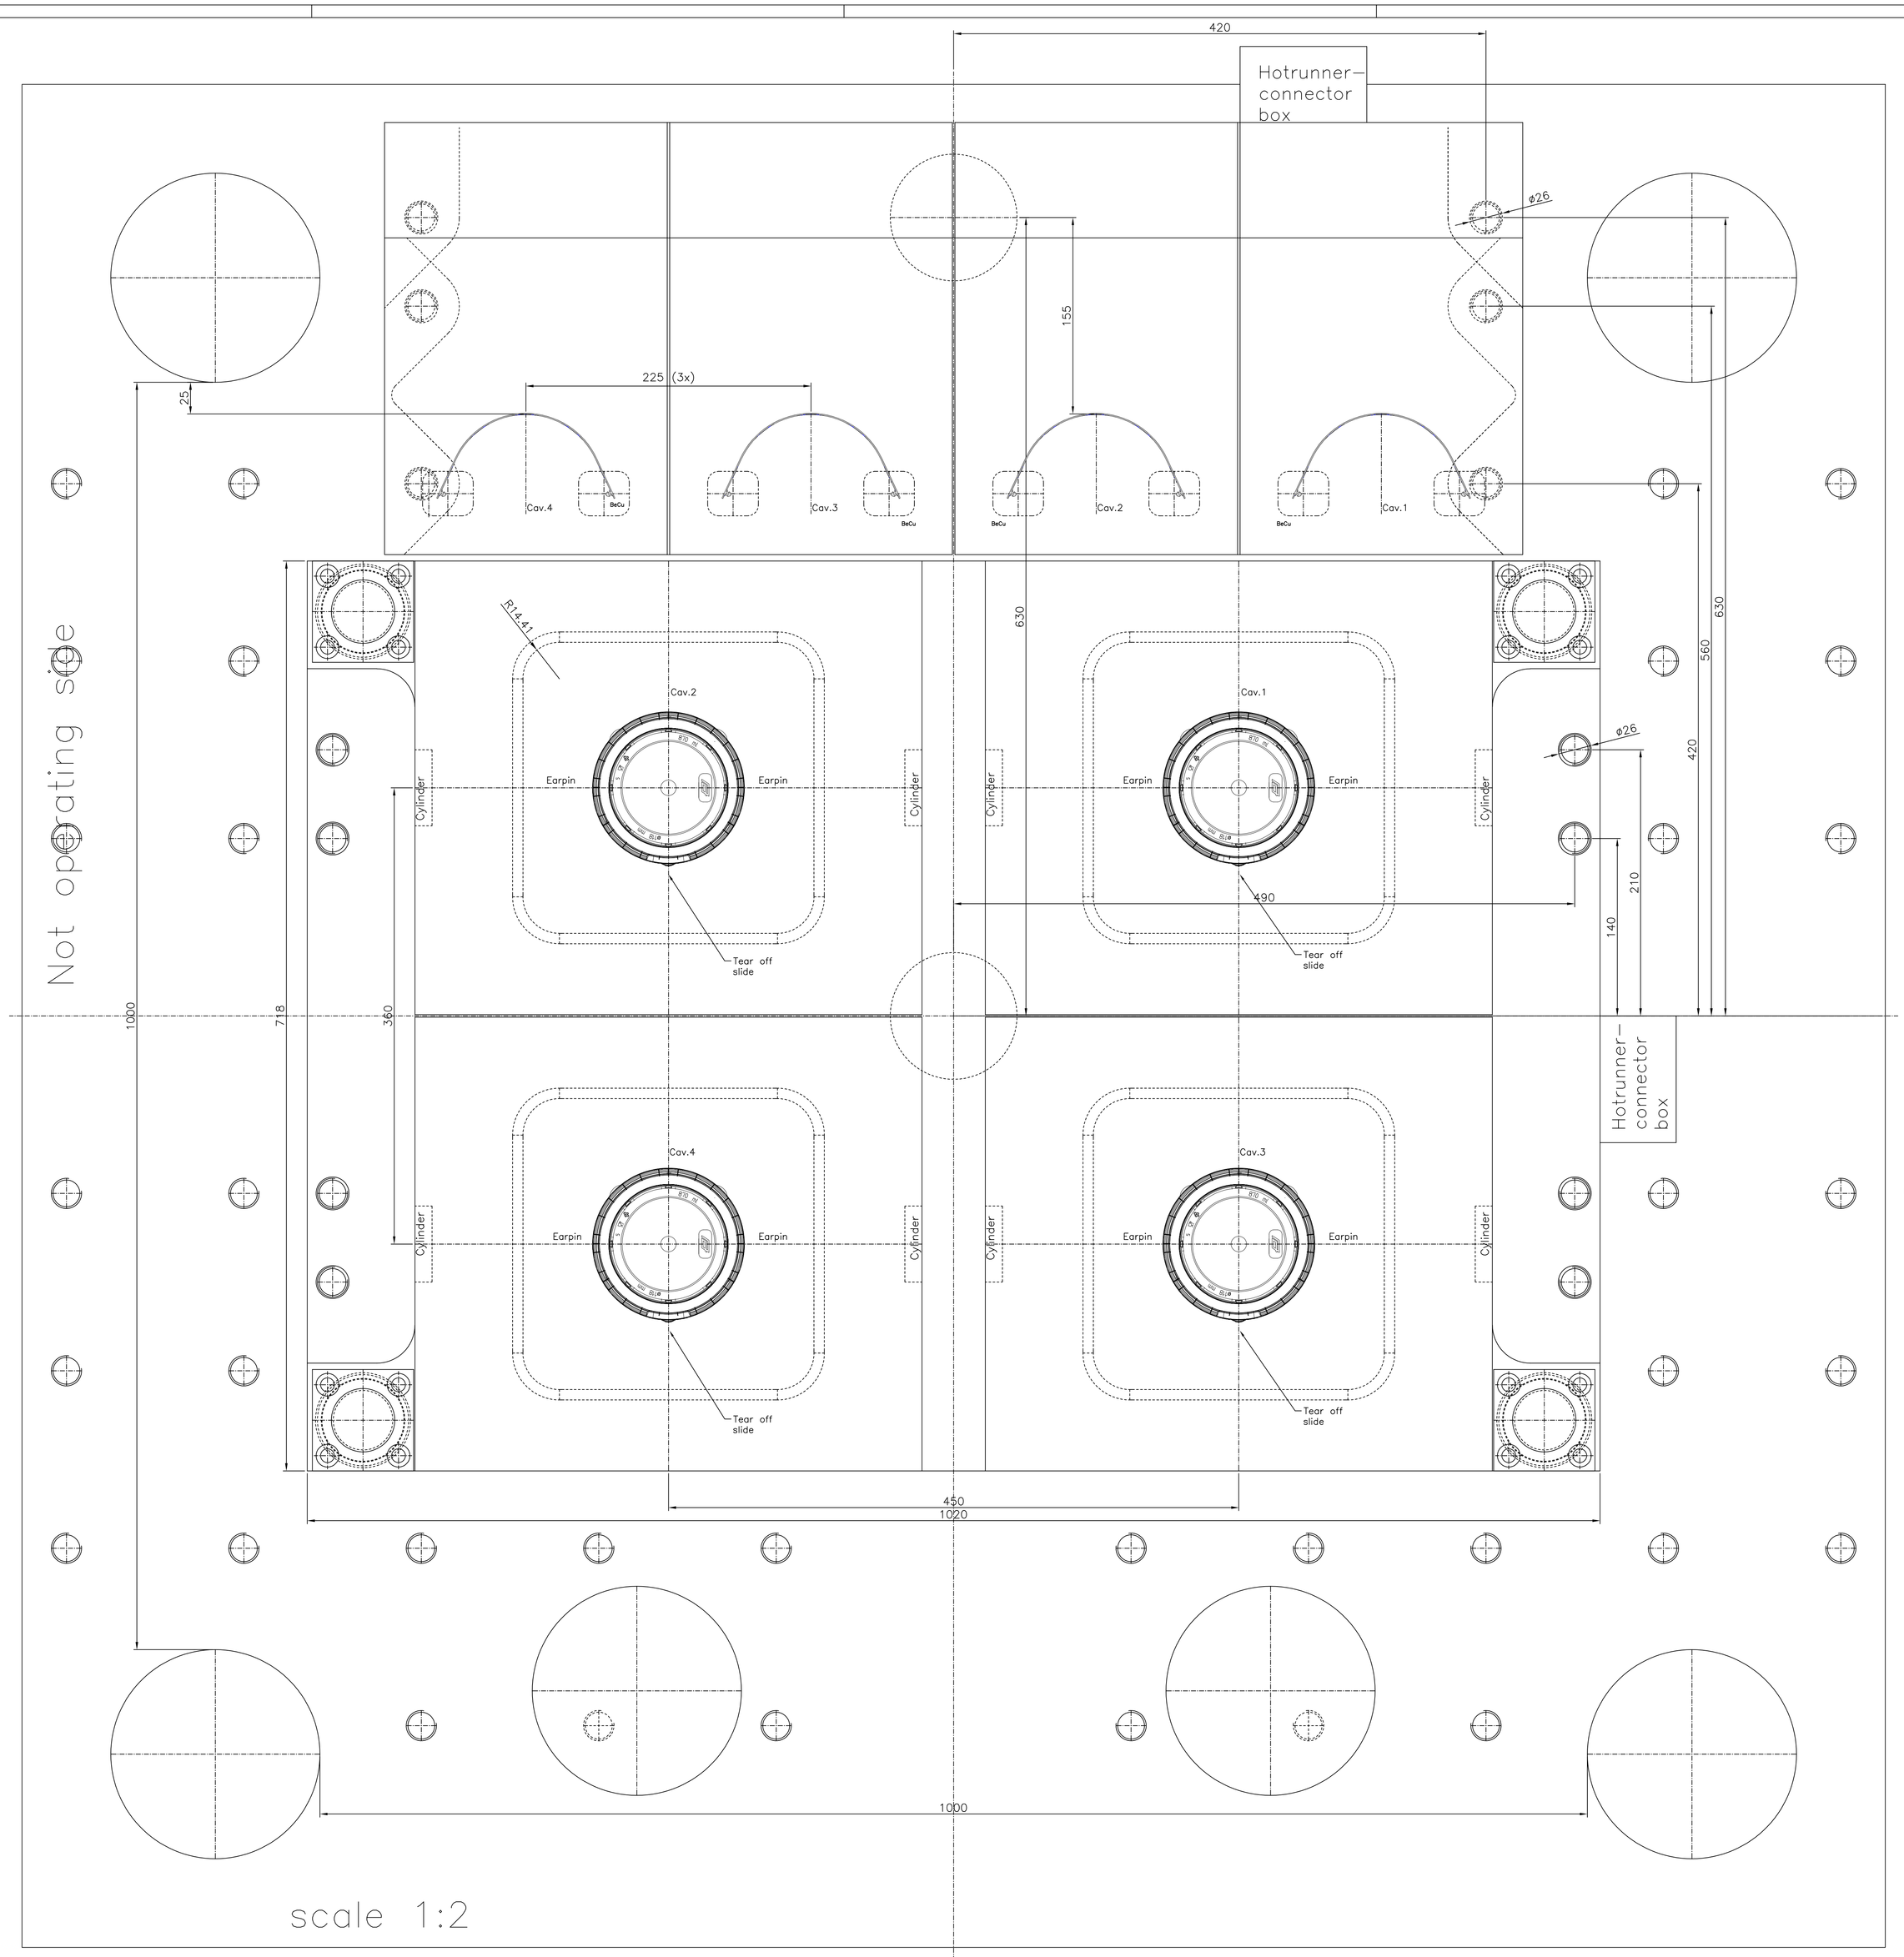


Handle mould

- Weight = ±1400 Kg.
- Mouldheight = 631 mm
- Pitch machinenozzles = 630 mm
- Mould dimensions = 898x341
- Hotrunner zones = 10

Central cooling per Mould half

- 1x IN/OUT Fixed side
- 1x IN/OUT Movable side
- 1"G Kamlock
- Hasco Z81/R13/1/4"G separate for coolingbushes

Hydraulic connectors

- 3/8"G Voss

Air connectors

- Festo 1/4"G 8mm

Electrical Connectors

1 connector for Heater:

- Connectorhouse: HAN E 24 pins 0930 024 0307
- Insert male: HAN E 24 pins 0933 024 2601

1 connector for Thermocouple:

- Connectorhouse: HAN E 24 pins 0930 024 0307
- Insert female: HAN E 24 pins 0933 024 2701

Pail mould

- Weight = ±3200 Kg.
- Mouldheight = 631 mm
- Pitch machinenozzles = 630 mm
- Mould dimensions = 1020x718
- Hotrunner zones = 9

Central cooling per Mould half

- 1x IN/OUT Fixed side
- 1x IN/OUT Movable side
- 1–1/2"G Kamlock
- Hasco Z81/R13/1/4"G separate for coolingbushes

Air connectors

- Festo 1/4"G 8mm


Electrical Connectors

1 connector for Heater:


- Connectorhouse: HAN E 24 pins 0930 024 0307
- Insert male: HAN E 24 pins 0933 024 2601

1 connector for Thermocouple:

- Connectorhouse: HAN E 24 pins 0930 024 0307
- Insert female: HAN E 24 pins 0933 024 2701

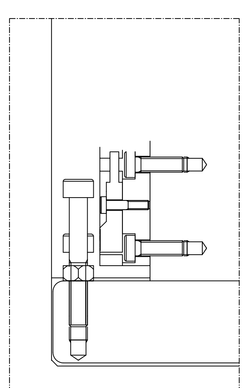

Sensors ejectioncross handle

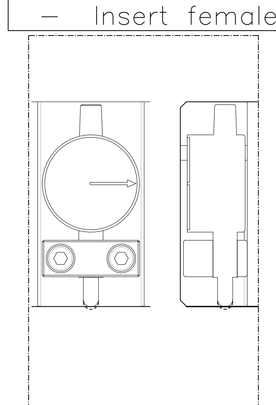

Measure clock at operator side

Concept draft,
don't use for production

Stork 5500-2150R/65 - 2K With special machine plates + special tiebar distance

Engineer: HVW	Material: /	Quantity: 1	Tolerances unless otherwise specified: 0 ±0.5 0.5 ±0.05 0.05 ±0.005 angles ±0° 30'
Date : 09-06-2017	Remarks: Shrinkage is 1.8%		
Scale : 1:1			
Project: Assembly-v1 870ml 4cav pail tomato		Client: Thrace-Ipoma	
van den BRINK Harskamp Holland Tel.(31)318-452500 Fax.(31)318-456378	Projection:	Order no.: A160151/152	Posnr.: 000-3