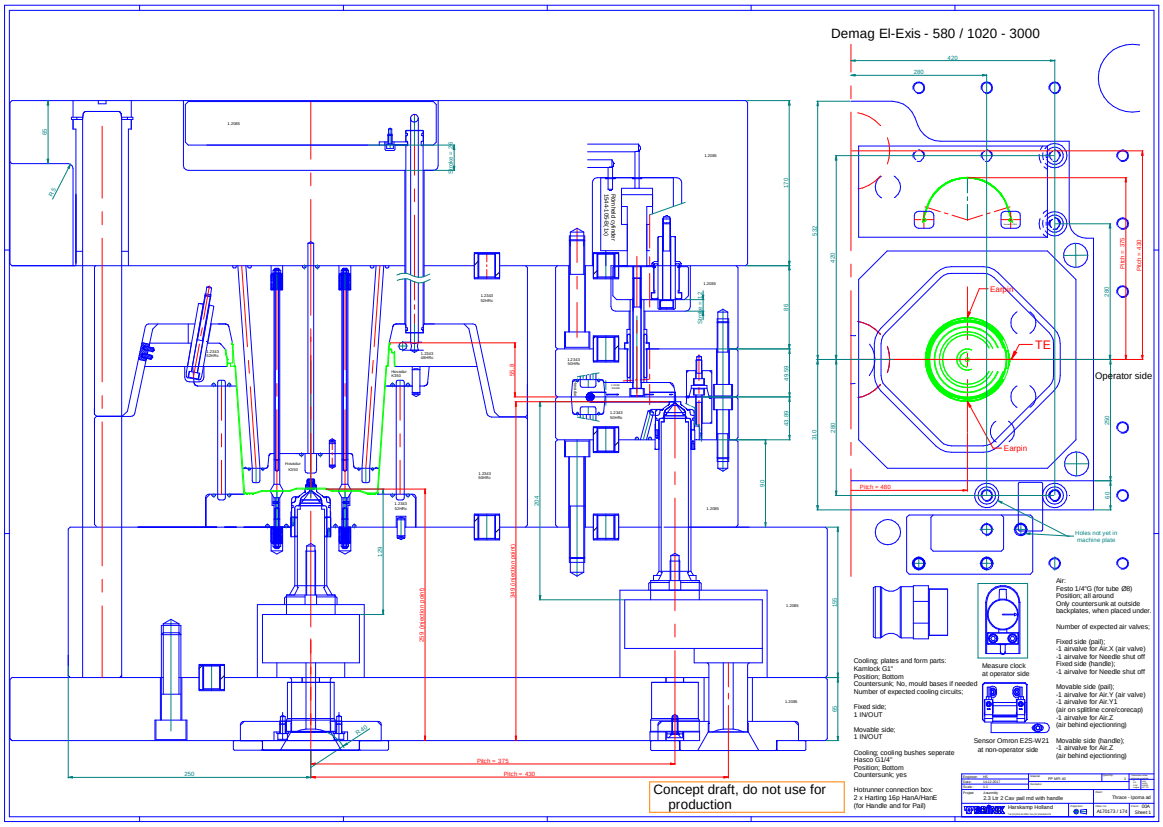

Demag El-Exis - 580 / 1020 - 3000
Earpin
TE
Earpin
Operator side
Pitch = 480
Holes not yet in machine plate
Pitch = 375
Pitch = 430
Concept draft, do not use for production
Cooling; plates and form parts:
Kamlock G1"
Position; Bottom
Countersunk; No, mould bases if needed
Number of expected cooling circuits;
Fixed side;
1 IN/OUT
Movable side;
1 IN/OUT
Cooling; cooling bushes seperate
Hasco G1/4"
Position; Bottom
Countersunk; yes
Hotrunner connection box:
2 x Harting 16p HanA/HanE
(for Handle and for Pail)
Measure clock
at operator side
Sensor Omron E2S-W21
at non-operator side
Air:
Festo 1/4"G (for tube Ø8)
Position; all around
Only countersunk at outside backplates, when placed under.
Number of expected air valves;
Fixed side (pail);
-1 airvalve for Air.X (air valve)
-1 airvalve for Needle shut off
Fixed side (handle);
-1 airvalve for Needle shut off
Movable side (pail);
-1 airvalve for Air.Y (air valve)
-1 airvalve for Air.Y.1
(air on splitline core/corecap)
-1 airvalve for Air.Z
(air behind ejectioning)
Movable side (handle);
-1 airvalve for Air.Z
(air behind ejectioning)
2.5 Lip 2 Cav pail mil with handle
Thrace - Izoma air
Hanskamp Holland
AI76173 / 174
Sheet 1