



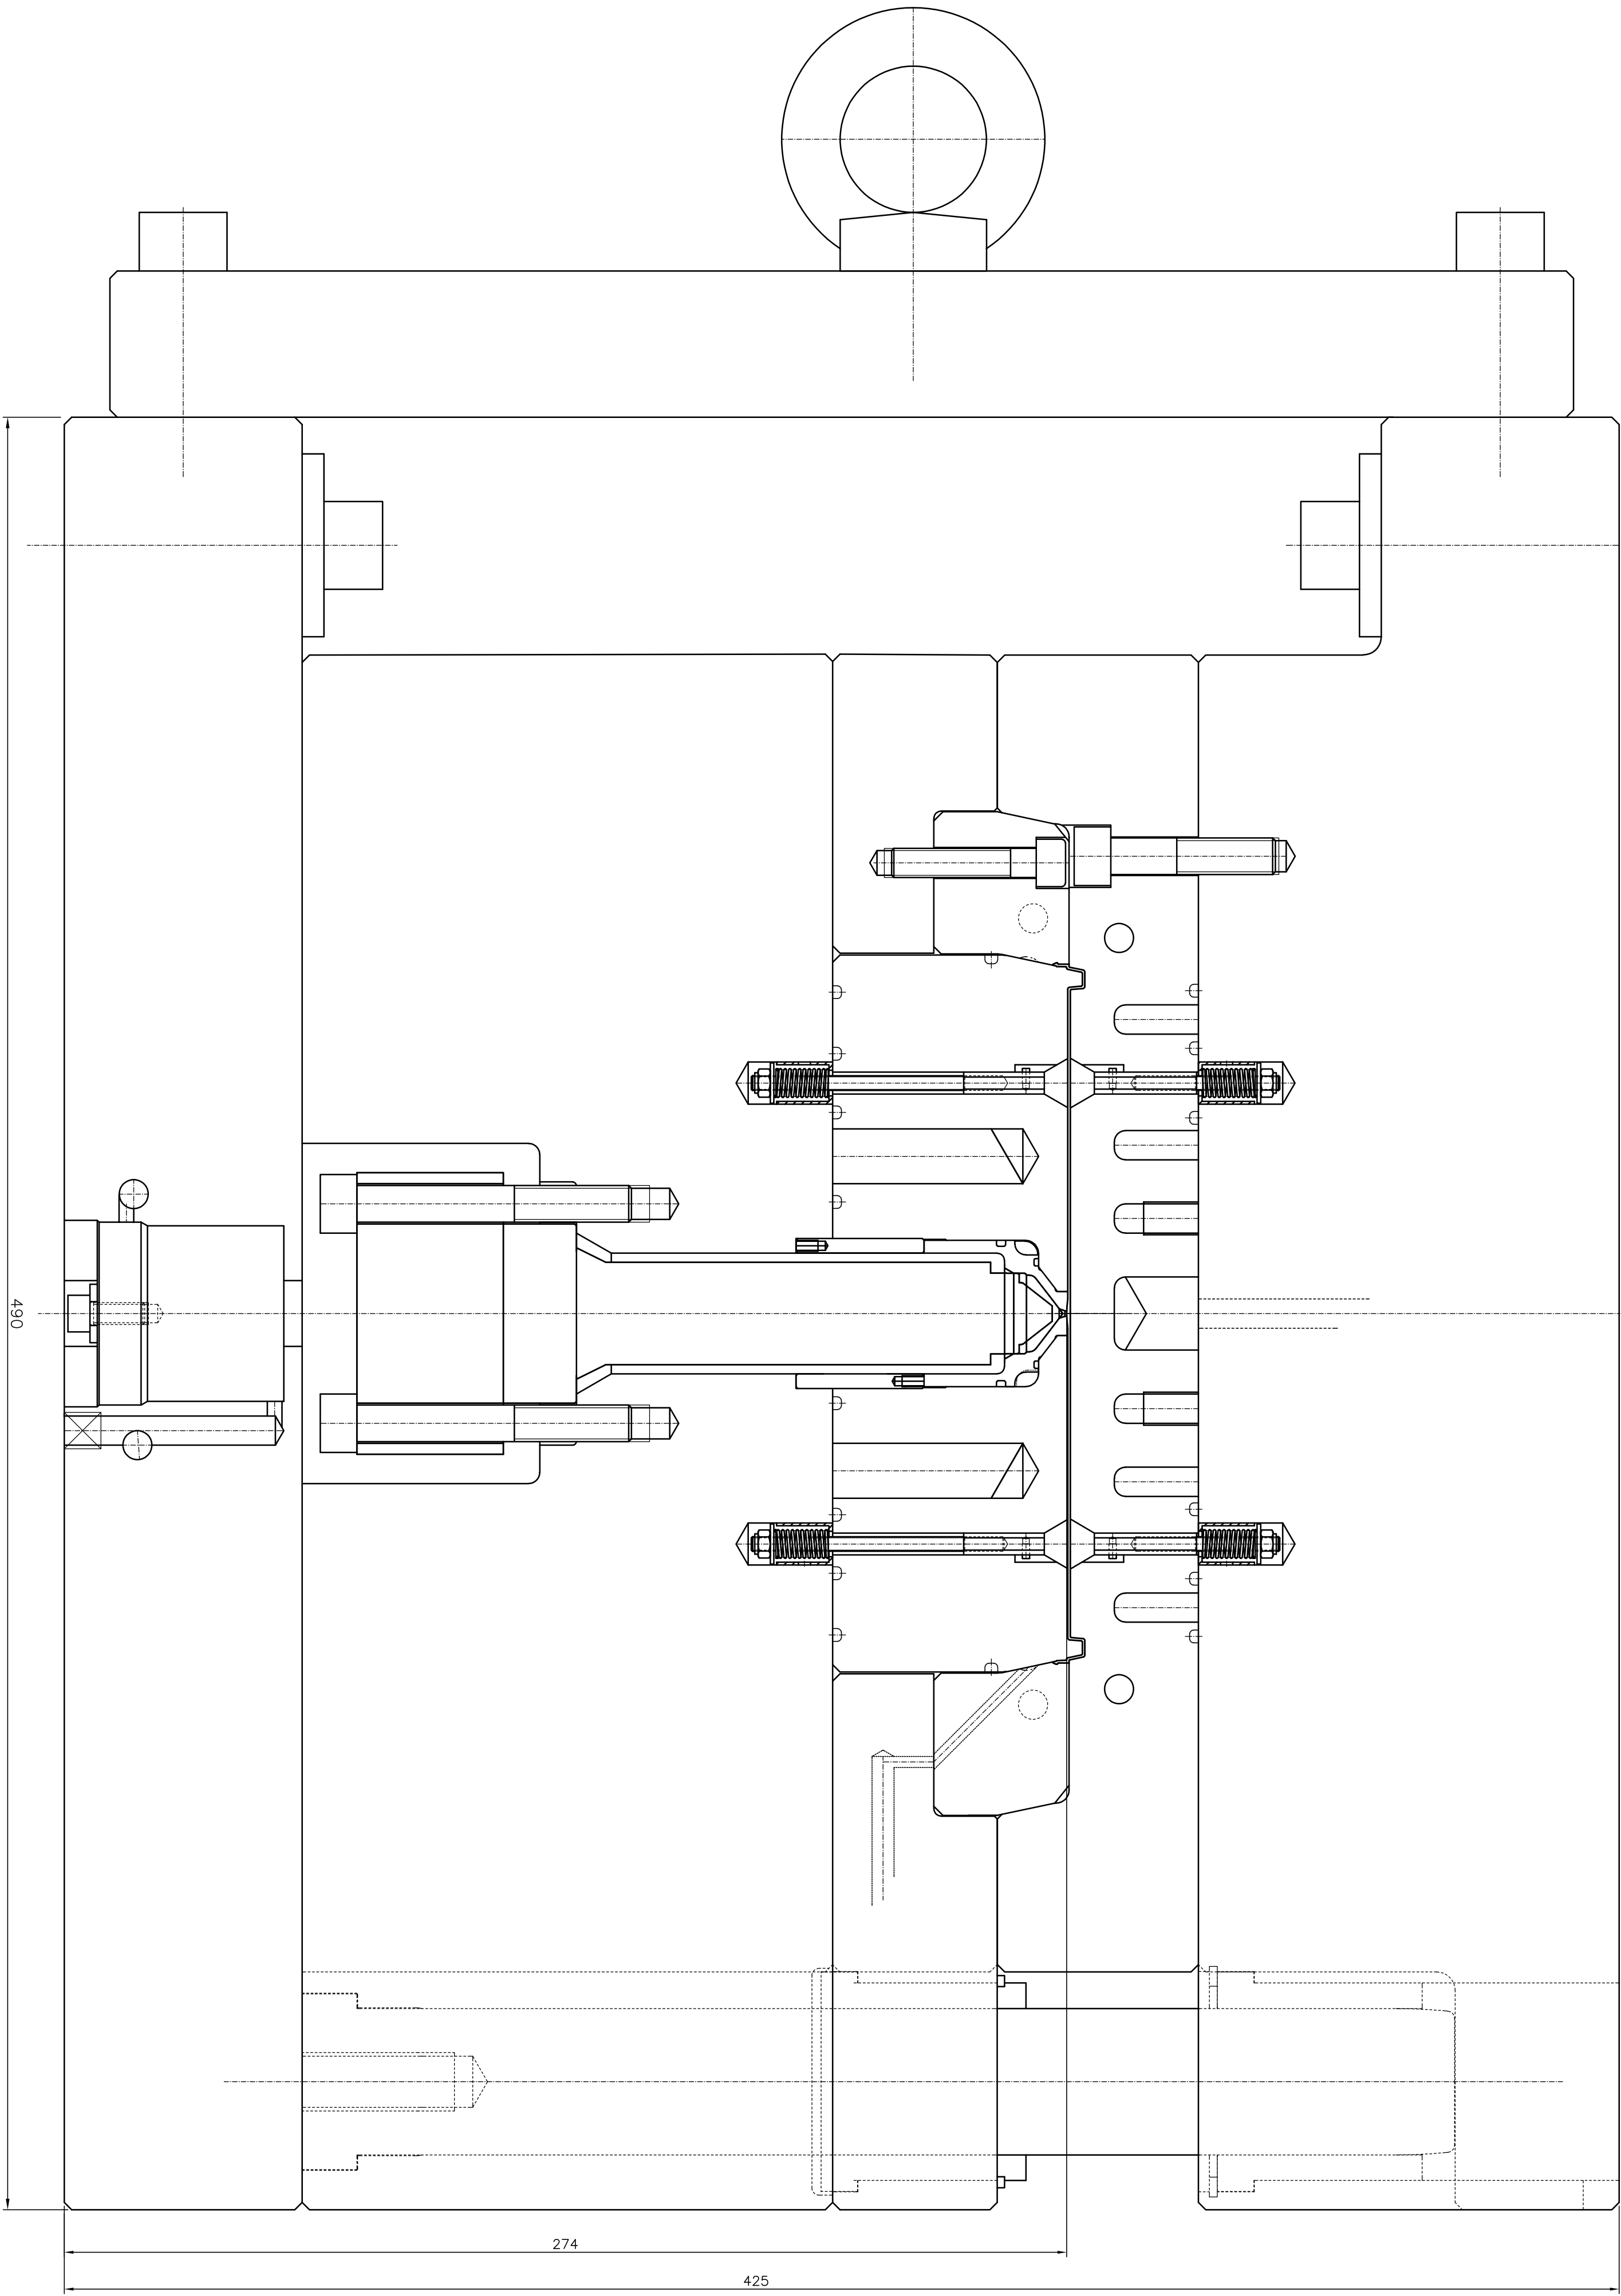


Engel e-motion 740/220T

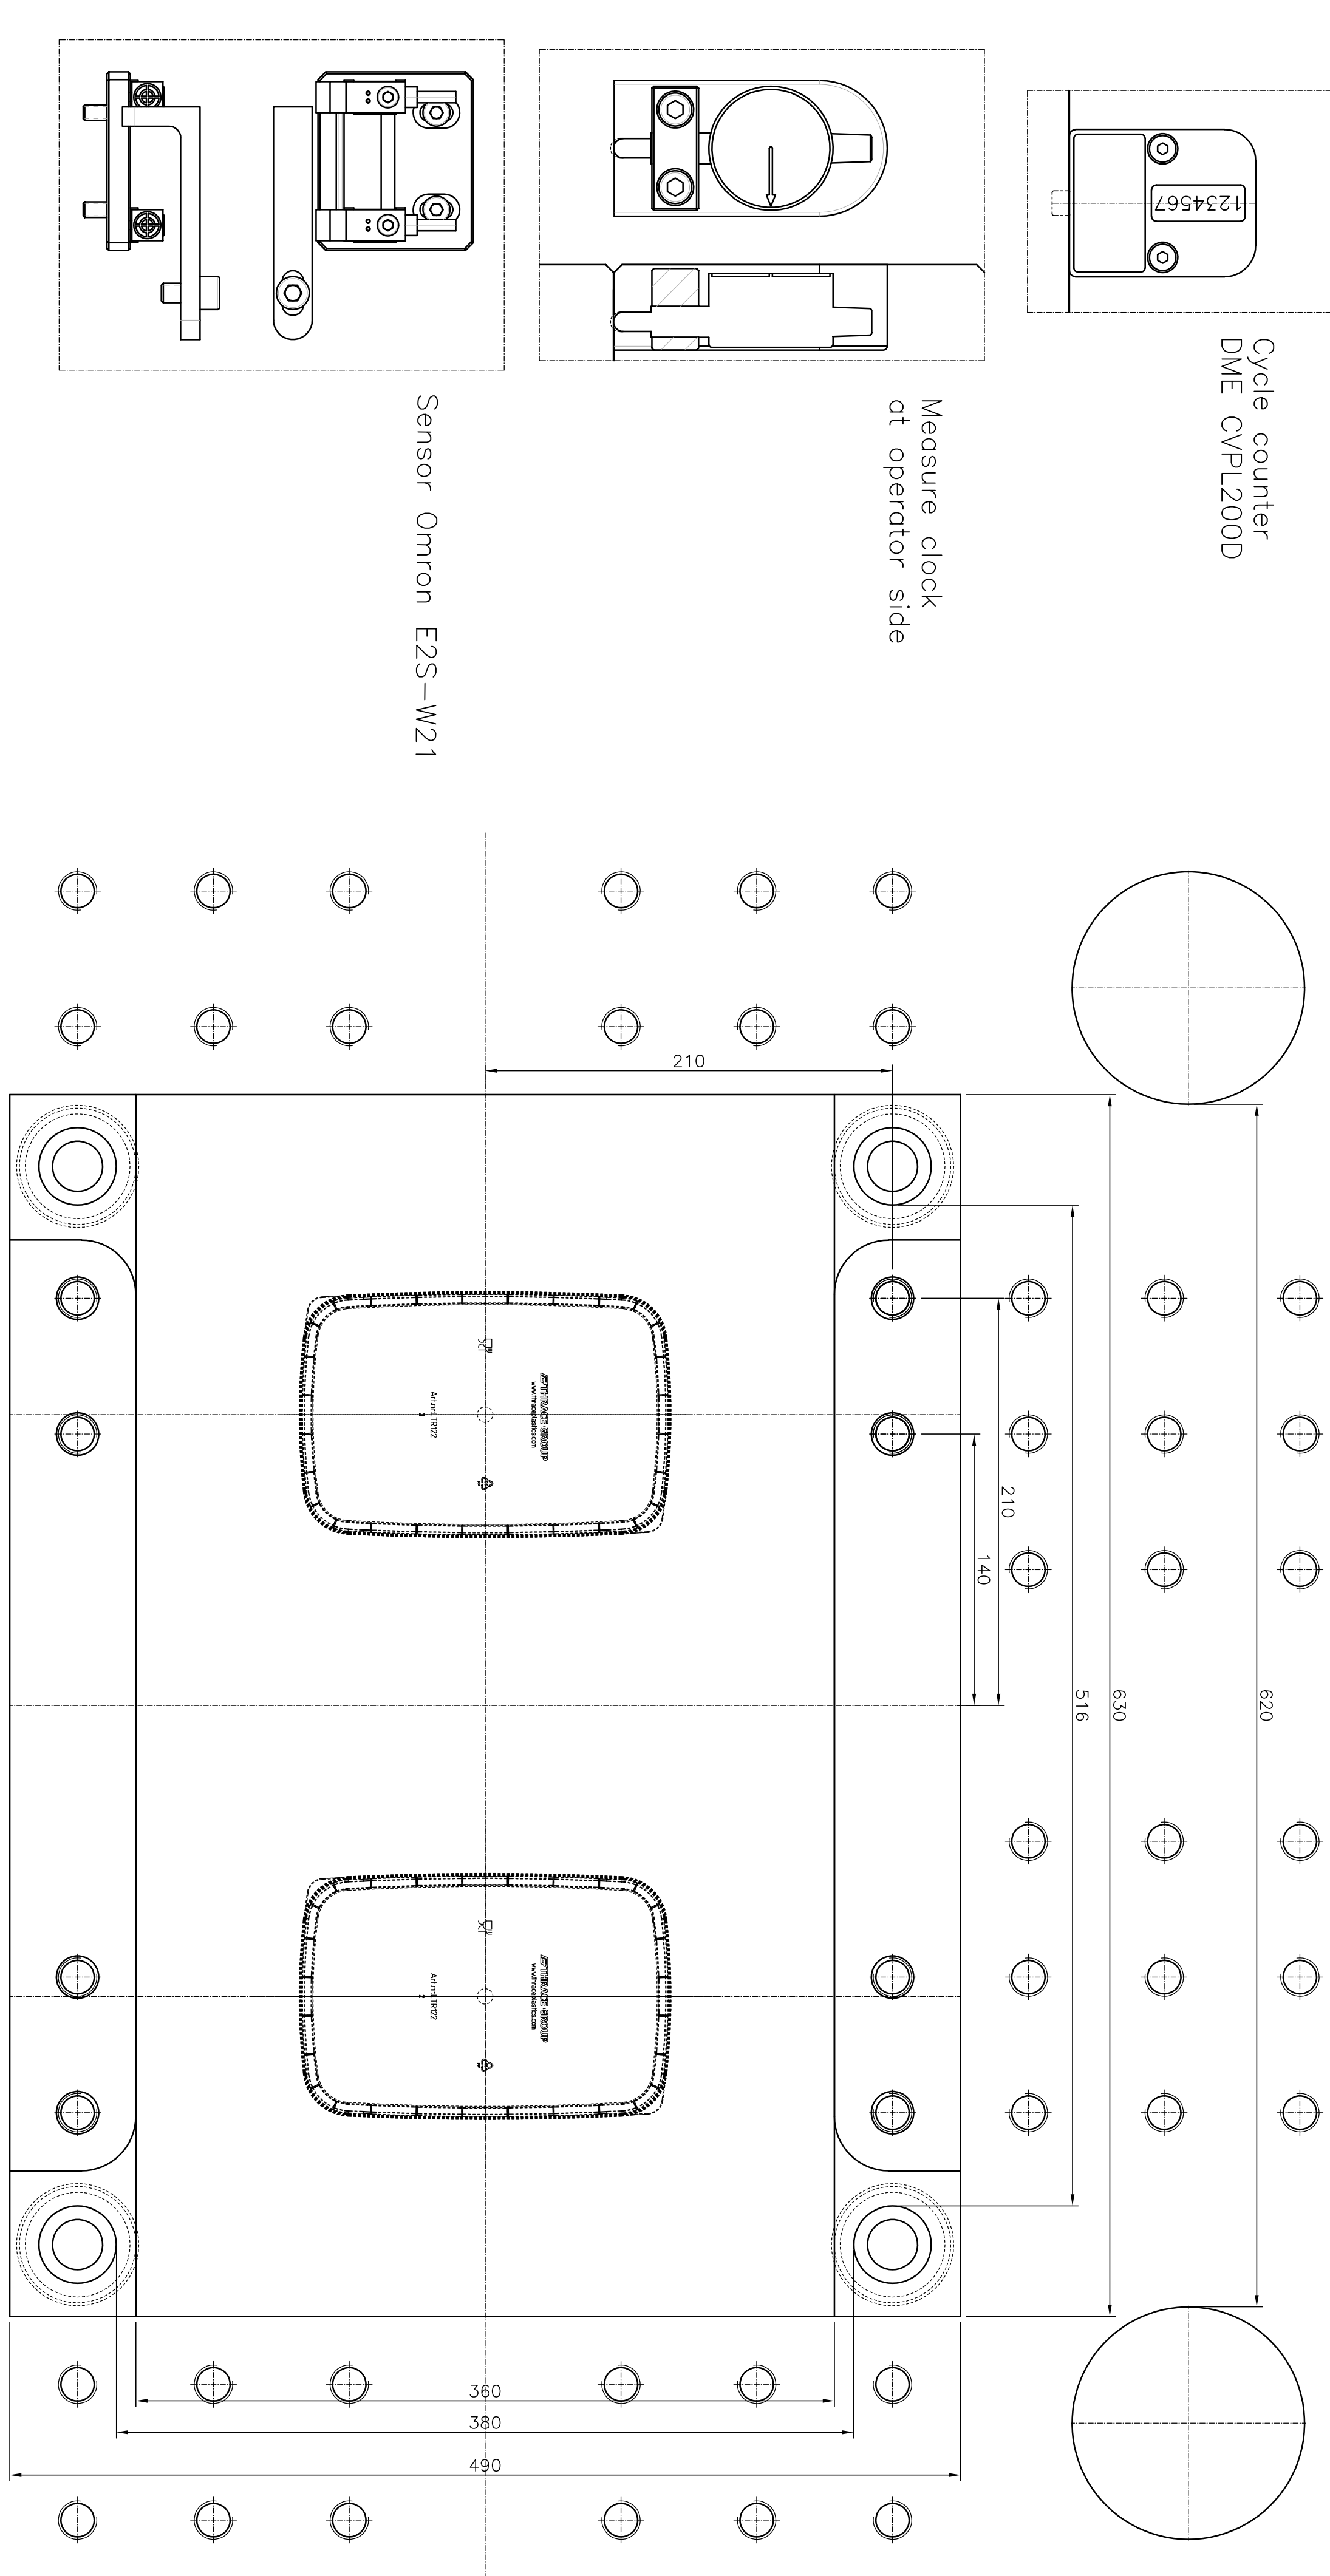

Cycle counter
DME CVP1200D

Measure clock
at operator side

Sensor Omron E2S-W21

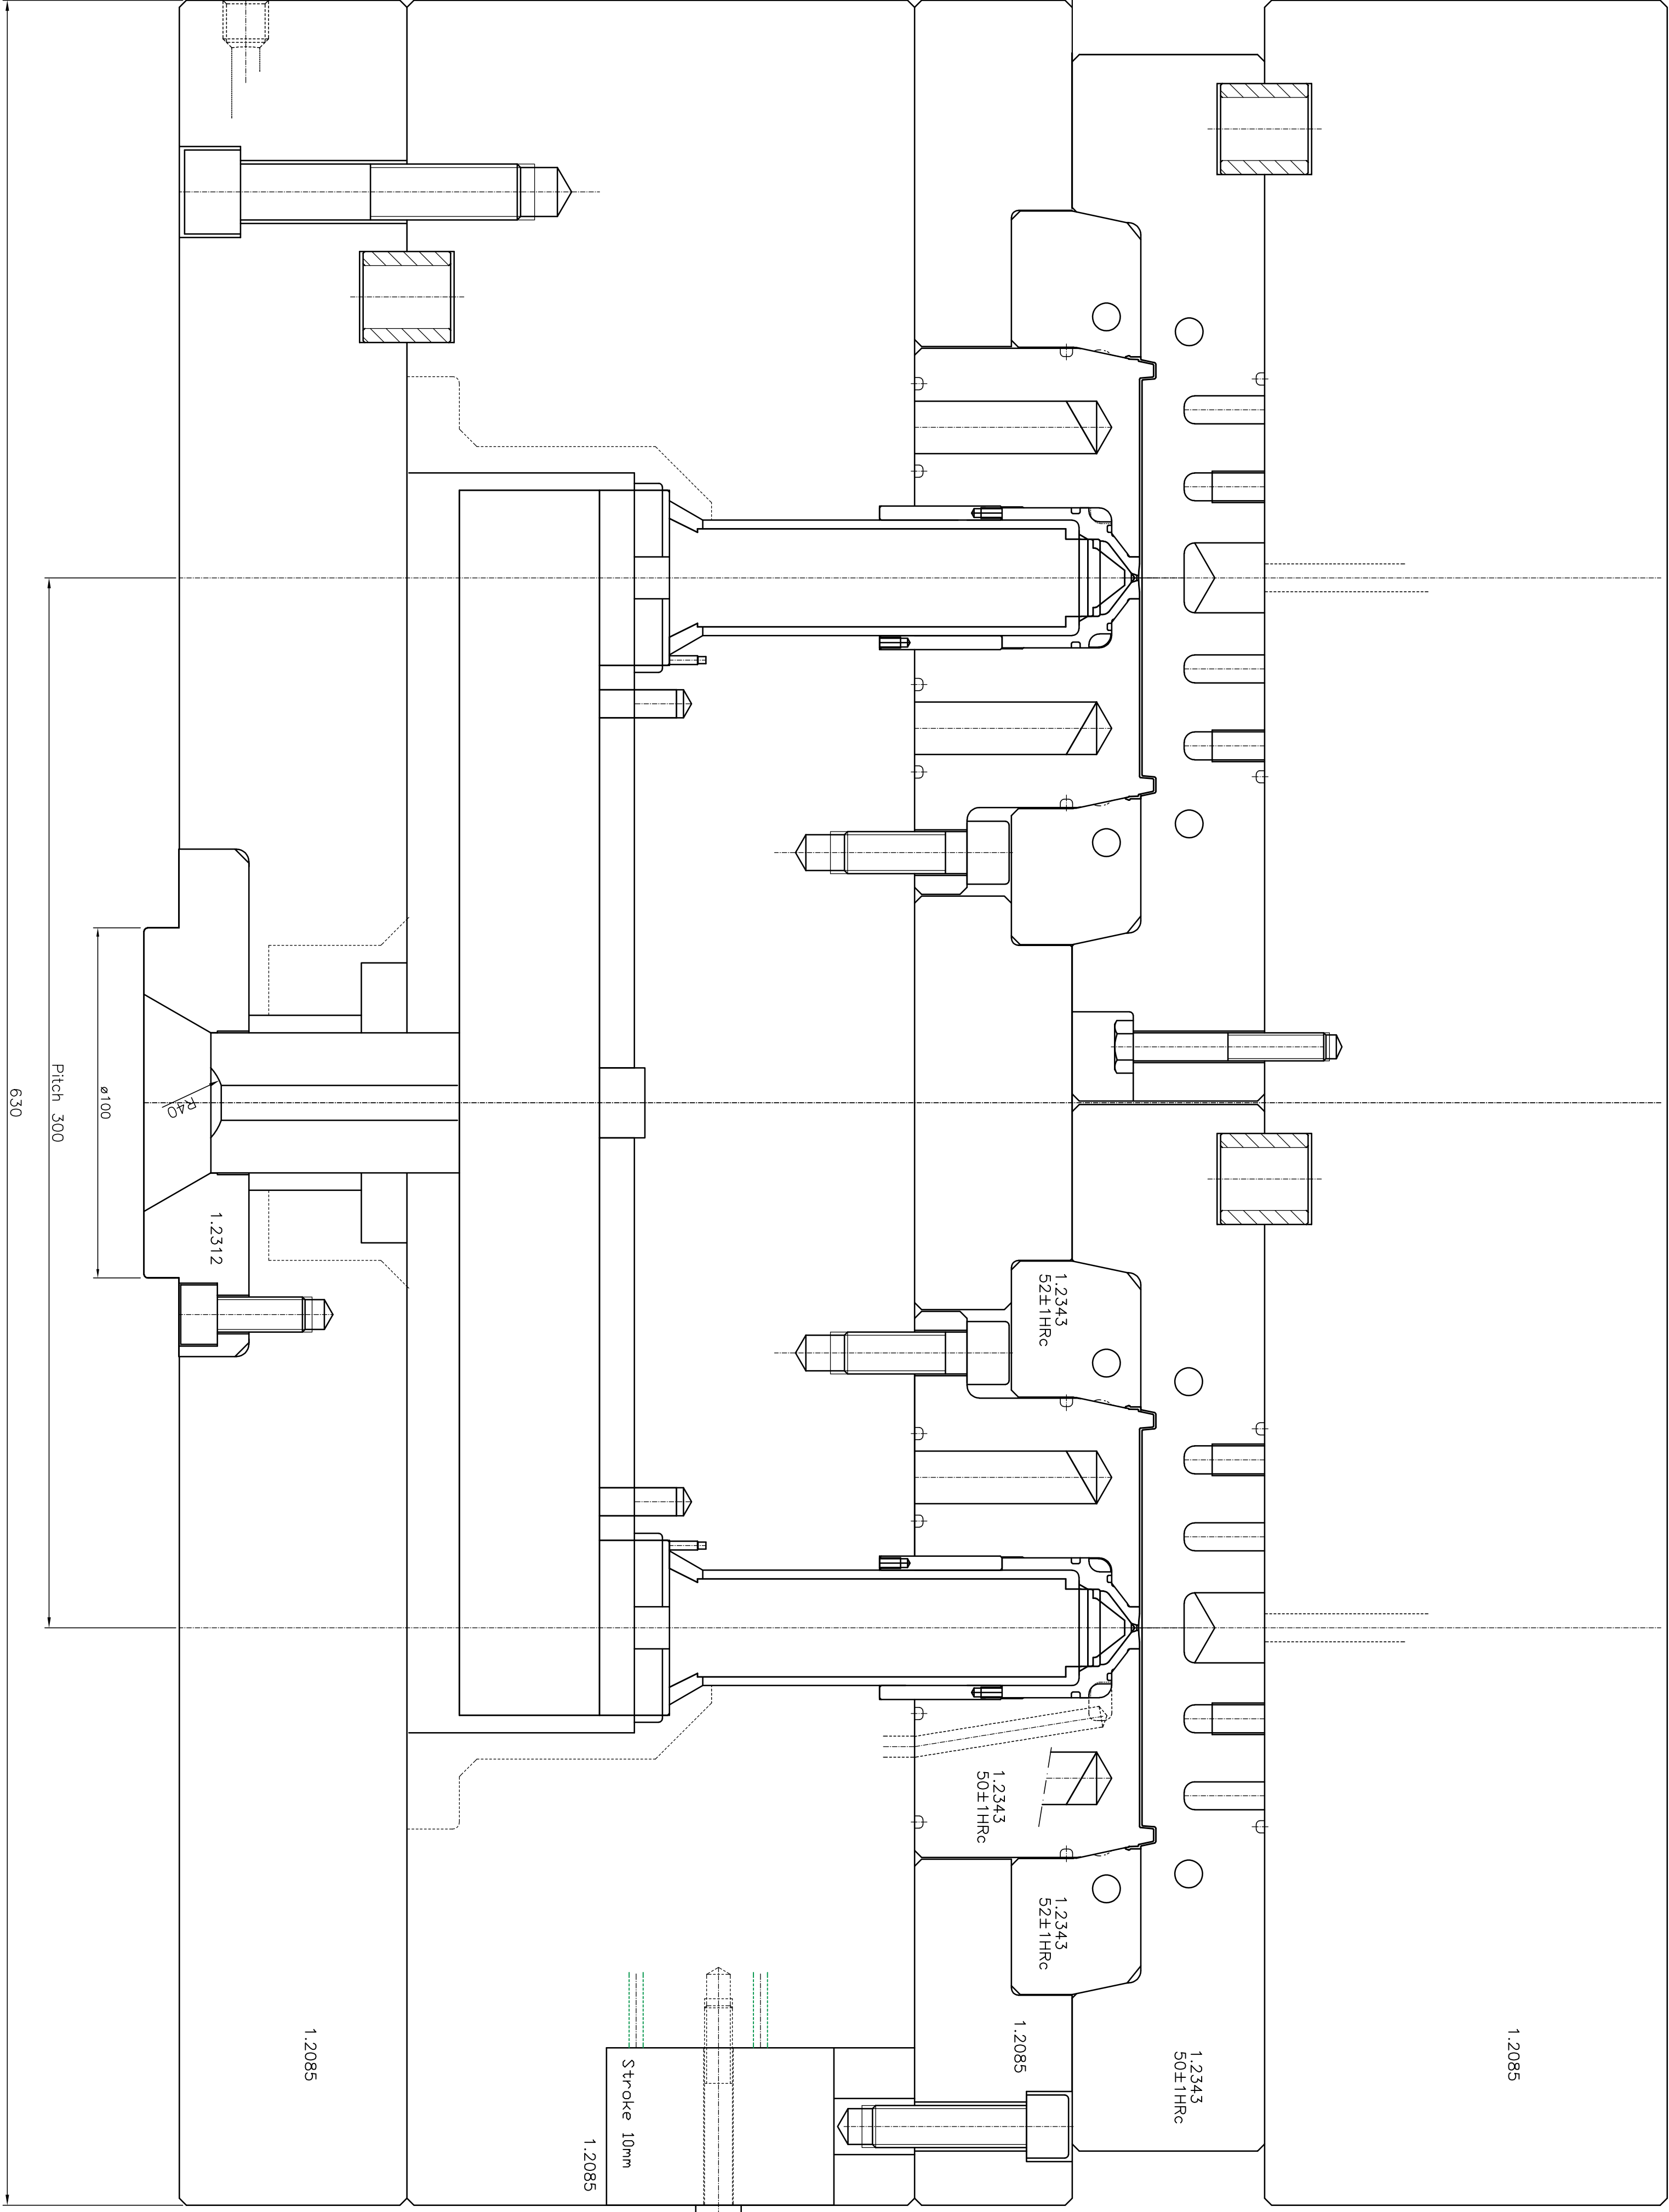

General information

- Mouldheight = ± 425 mm
 - Pitch = 300 mm
 - Mould dimensions = 490x 630
 - Hotrunner zones = 5
- Central cooling per Mould half
- 1x IN/OUT Fixed side
 - 1x IN/OUT Movable side
 - 1 1/4"G Kamlock
 - Hosco Z81/R13/1/4"G separate for coolingbushes
 - Position: Bottom
- Hydraulic connector
- Voss 1/4" G (for pipe $\varnothing 8$)
 - Position: Non-operatorside or Bottom

Air connectors

- Festo 1/4"G 8mm
 - Position: Top & (non) operator side
- Electrical Connectors
- 1 connector for Heater:
- Connectorhouse: HAN E 16 pins 0930 016 0307
 - Insert male: HAN E 16 pins 0933 016 2601
- 1 connector for Thermocouple:
- Connectorhouse: HAN A 16 pins 0920 016 0301
 - Insert female: HAN A 16 pins 0920 016 2812
 - Position: Top

Concept draft, do not use for production

Engineer: Nils H.	Date: 23-04-2019	Material: -	Quantity: -	Technical drawing: 1:1
Project: Moulding-1	Revision: 1.0X	Shrinkage: -	Order: Thrice	Item: 000
11tr Zcav lid ret	11tr Zcav lid ret	11tr Zcav lid ret	11tr Zcav lid ret	11tr Zcav lid ret
BRINK	Horskamp Holland	BRINK	Horskamp Holland	BRINK
BRINK	Horskamp Holland	BRINK	Horskamp Holland	BRINK