


Example of process influence to end product quality

Let us consider a few examples, reviewing the proportion of the final product, 0-16mm, produced at different stages of the process. Figure below displays these proportions.

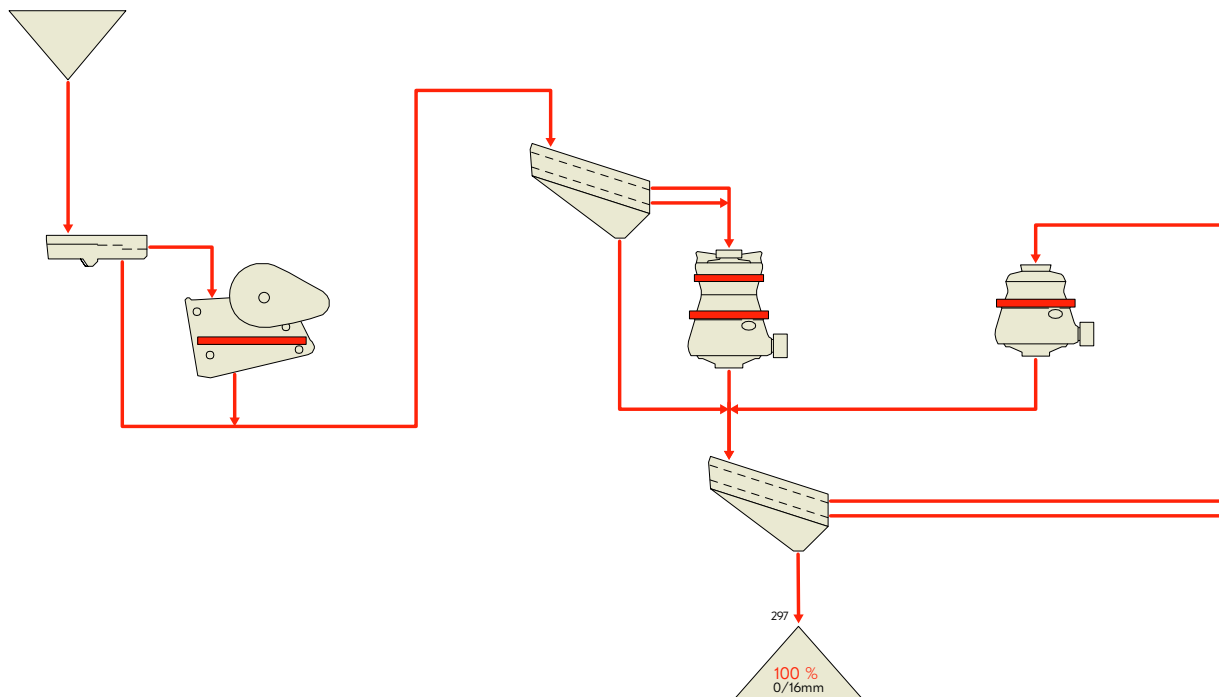

Production of 0-16mm at a maximum rate of 300 t/h

By examining the production of 0-16mm more closely, table 2 can be created:

Origin of the 0/16mm end product					
	Feed	C120	GP300S	GP550	Product
0-4	14,5 t/h	6,25 t/h	16,5 t/h	68 t/h	105,25 t/h
4-16	18,7 t/h	11,9 t/h	36,9 t/h	127,8 t/h	195,4 t/h
0-4	13,8 %	5,9 %	15,7 %	64,6 %	100 %
4-16	9,6 %	6,1 %	18,9 %	65,4 %	100 %

Origin of end product

About 35% of the final product, 0-16mm, is produced in stages other than the tertiary. 11% of the product comes directly from the feed and 6% from primary crusher. This 17% share of the final product can potentially ruin the quality.

The process making the same end product can be designed differently keeping the quality in mind.