

# LED LIGHTING

Price List Effective 1<sup>st</sup> July, 2016





## LED BULBS

### DURALED MINI



Power (W)	Cat Reference	Rated Lumen Output		CRI		Beam Angle	MRP (₹)
		6500K (6.5K)	3000K (3K)	6500K	3000K		
3W	EL DUR 3W B22 6.5K/3K EL DUR 3W E27 6.5K/3K	240	220	>80	>80	260°	290

\*LED Life: 40,000 hrs.

Available in B22 & E27 Caps

### DURALED BULB



Power (W)	Cat Reference	Rated Lumen Output		CRI		Beam Angle	MRP (₹)
		6500K (6.5K)	3000K (3K)	6500K	3000K		
5W	EL DUR 5W B22 6.5K/3K EL DUR 5W E27 6.5K/3K	450	400	>80	>80	260°	360
7W	EL DUR 7W B22 6.5K/3K	610	550	>80	>80	260°	425
9W	EL DUR 9W B22 6.5K/3K EL DUR 9W E27 6.5K/3K	800	720	>80	>80	260°	520

\*LED Life: 40,000 hrs.

Available in B22 & E27 Caps



### DURALED NEO

Power (W)	Cat Reference	Rated Lumen Output		CRI		Beam Angle	MRP (₹)
		6500K (6.5K)	3000K (3K)	6500K	3000K		
12W	EL DURN 12W B22 6K	1080	1020	>70	>70	260°	625

\*LED Life: 40,000 hrs.



### DURALED NEO BULB (Higher Wattage)

Power (W)	Cat Reference	Rated Lumen Output		CRI	Beam Angle	MRP (₹)
		6500K (6.5K)	3000K (3K)			
20W	EL DUR 'N' 20W B22 6.5K	2000		>80	260°	1200
30W	EL DUR 'N' 30W B22 6.5K	3000		>80	260°	1600
40W	EL DUR 'N' 40W B22 6.5K	4000		>80	260°	2100

\*LED Life: 40,000 hrs.

### LED COLOUR BULB



Power (W)	Cat Reference	Colour	CRI		Beam Angle	MRP (₹)
			6000K (6K)	3000K (3K)		
0.5W	EL BLB 0.5W B22 WHI/ BLU/ GRE/ RED/ ORA/ YEL	Available in White/ Blue/ Green/ Red/ Orange/ Yellow	>80	>80	210°	99

\*LED Life: 40,000 hrs.



# LED LIGHTING

## LED NIGHT LAMP



Power (W)	Cat Reference	Colour	CRI		Beam Angle	MRP (₹)
			6000K (6K)	3000K (3K)		
0.5W	EL NHT 0.5W B22 WH/ BLU/ GRE/ RED/ YEL	Available in Red/ Green/ Blue/ Yellow/ White	>80	>80	210°	65

\*LED Life: 40,000 hrs.

## SLIM PANEL SERIES

### SLIM LED NEO (Round)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	CO	6000K	4000K	3000K		
4W	EL RP SCX 4W RD 6K/4K/3K	200	185	170	21	85	70	>80	>80	>80	120°	599
6W	EL RP SCX 6W RD 6K/4K/3K	420	410	390	21	120	102	>80	>80	>80	120°	799
9W	EL RP SCX 9W RD 6K/4K/3K	630	610	580	21	147	120	>80	>80	>80	120°	1199
12W	EL RP SCX 12W RD 6K/4K/3K	870	845	800	25	170	153	>80	>80	>80	120°	1499
15W	EL RP SCX 15W RD 6K/4K/3K	1120	1100	1050	25	198	178	>80	>80	>80	120°	1799

\*LED Life: 40,000 hrs.

### SLIM LED NEO (Square)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	LxW	CO	6000K	4000K	3000K		
4W	EL RP SCX 4W SQ 6K/4K/3K	200	185	170	21	85x85	66x66	>80	>80	>80	120°	599
6W	EL RP SCX 6W SQ 6K/4K/3K	420	410	390	21	120x120	98x98	>80	>80	>80	120°	799
9W	EL RP SCX 9W SQ 6K/4K/3K	630	610	580	21	147x147	128x128	>80	>80	>80	120°	1199
12W	EL RP SCX 12W SQ 6K/4K/3K	870	845	800	25	172x172	147x147	>80	>80	>80	120°	1499
15W	EL RP SCX 15W SQ 6K/4K/3K	1120	1100	1050	25	201x201	178x178	>80	>80	>80	120°	1799
22W	EL RP SCX 15W SQ 6K/4K/3K	1650	1600	1525	25	224x224	198x198	>80	>80	>80	120°	2499


\*LED Life: 40,000 hrs.





## TRIM PANEL SERIES

### TRIM LED (Round)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6500K (6.5K)	4000K (4K)	3000K (3K)	H	OD	CO	6500K	4000K	3000K		
6W	EL RP TRM 6W RD 6.5K/4K/3K	420	400	380	9.3	120	100	>80	>80	>80	120°	899
12W	EL RP TRM 12W RD 6.5K/4K/3K	1000	950	900	9.3	175	150	>80	>80	>80	120°	1599
18W	EL RP TRM 18W RD 6.5K/4K/3K	1530	1450	1380	9.3	225	195	>80	>80	>80	120°	2199

\*LED Life: 40,000 hrs.

### TRIM LED (Square)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6500K (6.5K)	4000K (4K)	3000K (3K)	H	OD	CO	6500K	4000K	3000K		
6W	EL RP TRM 6W SQ 6.5K/4K/3K	420	400	380	9.3	120x120	100x100	>80	>80	>80	120°	899
12W	EL RP TRM 6W SQ 6.5K/4K/3K	1000	950	900	9.3	175x175	150x150	>80	>80	>80	120°	1599
18W	EL RP TRM 6W SQ 6.5K/4K/3K	1530	1450	1380	9.3	225x225	195x195	>80	>80	>80	120°	2199

\*LED Life: 40,000 hrs.

## HIGHLIGHT SERIES

### ON SPOT LED SPOTLIGHT (Round)



Power (W)	Cat Reference	Rated Lumen Output		Product Dimension			CRI		Beam Angle	MRP (₹)
		5000K (5K)	3000K (3K)	H	OD	CO	5000K	3000K		
2W	EL HL OSP 6064 2W RD SL 5K/3K EL HL OSP 6064 2W RD PC 5K/3K	150	140	41	53	46	>70	>80	45°	999

\*LED Life: 40,000 hrs.

### ON SPOT LED SPOTLIGHT (Square)



Power (W)	Cat Reference	Rated Lumen Output		Product Dimension			CRI		Beam Angle	MRP (₹)
		5000K (5K)	3000K (3K)	H	OD	CO	5000K	3000K		
2W	EL HL OSP 6180 2W SQ SL 5K/3K EL HL OSP 6180 2W SQ PC 5K/3K	150	140	50	46x46	39x39	>70	>80	45°	999

\*LED Life: 40,000 hrs.



# LED LIGHTING

## MINT LED SPOTLIGHT



Power (W)	Cat Reference	Rated Lumen Output		Product Dimension			CRI		Beam Angle	MRP (₹)
		6000K (6K)	2700K (2.7K)	H	OD	CO	6000K	2700K		
2W	EL HL MNT 2W SS 6K/2.7K	100	80	30	40	35	>80	>80	45°	375

\*LED Life: 40,000 hrs.

## GU10 LED SPOTLIGHT



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI	Beam Angle	MRP (₹)
		3000K (3K)			H	OD		3000K		
5W	EL HL GU10 5W 3K	300			50	50		>80	38°	495

\*LED Life: 40,000 hrs.

## SPOTLED



Power (W)	Cat Reference	Rated Lumen Output		Product Dimension			CRI		Beam Angle	MRP (₹)
		6000K (6K)	3000K (3K)	H	OD	CO	6000K	3000K		
4W	EL HL SPT 4W 30D 6K/3K	280	260	40	85	76	>70	>80	30°	750
7W	EL HL SPT 7W 30D 6K/3K	500	480	45	109	90	>70	>80	30°	1200

\*LED Life: 40,000 hrs.

## DOWNLIGHT SERIES

### CRYSTALED (Round)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	CO	6000K	4000K	3000K		
6W	EL DL CRL 6W RD 6K/4K/3K	400	380	360	45	98	81	>80	>80	>80	120°	1050
12W	EL DL CRL 12W RD 6K/4K/3K	940	895	850	45	160	140	>80	>80	>80	120°	1750
16W	EL DL CRL 16W RD 6K/4K/3K	1250	1190	1130	45	200	180	>80	>80	>80	120°	2400

\*LED Life: 40,000 hrs.

### CRYSTALED (Square)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	CO	6000K	4000K	3000K		
6W	EL DL CRL 6W SQ 6K/4K/3K	400	380	360	45	98x98	81x81	>80	>80	>80	120°	1050
12W	EL DL CRL 12W SQ 6K/4K/3K	940	895	850	45	160x160	140x140	>80	>80	>80	120°	1750
16W	EL DL CRL 16W SQ 6K/4K/3K	1250	1190	1130	45	200x200	180x180	>80	>80	>80	120°	2400

\*LED Life: 40,000 hrs.



## FLATFIT



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		5000K (5K)	4000K (4K)	2700K (2.7K)	H	OD	CO	5000K	4000K	2700K		
15W (Round)	EL DL FFT 15W RD 5K/4K/2.7K	900	850	820	50	150	115	>80	>80	>90	85°	2900
15W (Square)	EL DL FFT 15W SQ 5K/4K/2.7K	900	850	820	50	130X130	100X100	>80	>80	>90	85°	2900

\*LED Life: 40,000 hrs.

## FOCALUX



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		5000K (5K)	4000K (4K)	2700K (2.7K)	H	OD	CO	5000K	4000K	2700K		
15W	EL FLX 15W RD 5K/4K/2.7K	900	850	820	115	165	120	>80	>80	>90	85°	3595

\*LED Life: 40,000 hrs.

## OPALED



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	CO	6000K	4000K	3000K		
8W	EL DL OPL 8W RD 6K/4K/3K	600	570	540	60	110	100	>80	>80	>80	120°	1250
13W	EL DL OPL 13W RD 6K/4K/3K	1150	1090	1040	60	148	138	>80	>80	>80	120°	1950
18W	EL DL OPL 18W RD 6K/4K/3K	1500	1400	1300	60	182	172	>80	>80	>80	120°	2700

\*LED Life: 40,000 hrs.

## VENETO



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	CO	6000K	4000K	3000K		
10W	EL DL VEN 10W 6K/4K/3K	800	660	600	66	102	80	>70	>75	>80	115°	2600
15W	EL DL VEN 15W 6K/4K/3K	1200	1000	900	80	145	125	>70	>75	>80	115°	3600

\*LED Life: 40,000 hrs.



# LED LIGHTING

## COMMERCIAL COB

### SUNCOBLED



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	3000K (3K)		H	OD	CO	6000K	3000K			
6W	EL SUN COB 6W 30D SL 6K/3K	460	430		52	85	76	>70	>80		30°	1100
10W	EL SUN COB 10W 30D SL 6K/3K	850	800		62	109	90	>70	>80		30°	1500

\*LED Life: 40,000 hrs.

### COBLED



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	CO	6000K	4000K	3000K		
16W	EL COB 16W 24DEG 6K/4K/3K	1480	1410	1350	89	115	100	>80	>80	>80	24°	2100
22W	EL COB 22W 24DEG 6K/4K/3K	1800	1725	1650	114	140	125	>80	>80	>80	24°	2800
30W	EL COB 30W 24DEG 6K/4K/3K	2350	2250	2150	133	180	150	>80	>80	>80	24°	3700

\*LED Life: 40,000 hrs.

### ZOOMLED



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension			CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	CO	6000K	4000K	3000K		
12W	EL ZLD 12W 24DEG 6K/4K/3K	1240	1170	1100	94	120	105	>80	>80	>80	24°	2000
30W	EL ZLD 30W 24DEG 6K/4K/3K	2350	2250	2150	148	170	150	>80	>80	>80	24°	4200

\*LED Life: 40,000 hrs.

### TRACKLED



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension		CRI			Beam Angle	MRP (₹)
		5300K (5.3K)	4000K (4K)	3000K (3K)	H	L x W	5300K	4000K	3000K		
10W	EL LUX TRL 10W 24DEG 5.3K/4K/3K	810	765	720	85	205x105	>80	>80	>90	24°	2250
16W	EL LUX TRL 16W 24DEG 5.3K/4K/3K	1440	1360	1280	125	230x185	>80	>80	>90	24°	3600
30W	EL LUX TRL 30W 36DEG 5.3K/4K/3K	2700	2550	2400	135	240x190	>80	>80	>90	36°	6000
45W	EL LUX TRL 45W 36DEG 5.3K/4K/3K	4050	3825	3600	150	255x140	>80	>80	>90	36°	11000

\*LED Life: 40,000 hrs.



## COMMERCIAL LIGHTING

### LED TILE (Backlit Panel)



Power (W)	Cat Reference	Rated Lumen Output	Product Dimension			CRI	Beam Angle	MRP (₹)
		6000K (6K)	H	OD	CO	6000K		
24W	EL LTL 24W 1X1 6K	1800	60	300x300	280x280	>80	120°	5000
36W	EL LTL 36W 2X2 6K	2900	60	596x596	570x570	>80	120°	4999
45W	EL LTL 45W 2X2 6K	3600	60	596x596	570x570	>80	120°	5999

\*LED Life: 40,000 hrs.

### COOLED



Power (W)	Cat Reference	Rated Lumen Output	Product Dimension		CRI	Beam Angle	MRP (₹)
		6000K (6K)	H	L x W	6000K		
38W	EL COL 38W 2X2 6K	3200	56	596x596	>80	120°	4999

\*LED Life: 40,000 hrs.

### SUPER SLIM LED TILE



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension		CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	L x W	6000K	4000K	3000K		
36W (2x2)	EL SS LTL 36W 2X2 6K/4K/3K	2900	2800	2700	9	596x596	>80	>80	>80	150°	5999
45W (2x2)	EL SS LTL 40W 2X2 6K/4K/3K	3400	3200	3100	9	596x596	>80	>80	>80	150°	5999
40W (1x4)	EL SS LTL 40W 1X4 6K/4K/3K	3200	3100	3000	9	300x1200	>80	>80	>80	150°	5999
30W (1x2)	EL SS LTL 30W 1X2 6K/4K/3K	2400	2300	2200	9	300x600	>80	>80	>80	150°	3999

\*LED Life: 40,000 hrs.

## SURFACE SERIES

### CEIL'O NEO LED SURFACE MOUNTED (Round)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension		CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	OD	6000K	4000K	3000K		
6W	EL SM CCX 6W RD 6K/4K/3K	420	410	390	40	120	>80	>80	>80	120°	1099
12W	EL SM CCX 12W RD 6K/4K/3K	840	820	800	40	175	>80	>80	>80	120°	1699
15W	EL SM CCX 15W RD 6K/4K/3K	1050	997	947	40	175	>80	>80	>80	120°	1999

\*LED Life: 40,000 hrs.





# LED LIGHTING

## CEIL'O NEO LED SURFACE MOUNTED (Square)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension		CRI			Beam Angle	MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	H	L x W	6000K	4000K	3000K		
6W	EL SM CCX 6W SQ 6K/4K/3K	420	410	390	40	120x120	>80	>80	>80	120°	1099
12W	EL SM CCX 12W SQ 6K/4K/3K	840	820	800	40	175x175	>80	>80	>80	120°	1699
15W	EL SM CCX 15W SQ 6K/4K/3K	1050	997	947	40	175x175	>80	>80	>80	120°	1999
22W	EL SM CCX 22W SQ 6K/4K/3K	1540	1507	1432	40	235x235	>80	>80	>80	120°	2799

\*LED Life: 40,000 hrs.

## CEIL'O SKY LED SURFACE MOUNTED (Round)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension		CRI			Beam Angle	MRP (₹)
		6500K (6.5K)	4000K (4K)	3000K (3K)	H	OD	6500K	4000K	3000K		
6W	EL SM CSK 6W RD 6.5K/4K/3K	420	400	380	43	125	>80	>80	>80	120°	1199
12W	EL SM CSK 12W RD 6.5K/4K/3K	990	940	900	43	175	>80	>80	>80	120°	1799
18W	EL SM CSK 18W RD 6.5K/4K/3K	1530	1450	1380	43	225	>80	>80	>80	120°	2299

\*LED Life: 40,000 hrs.

## CEIL'O SKY LED SURFACE MOUNTED (Square)



Power (W)	Cat Reference	Rated Lumen Output			Product Dimension		CRI			Beam Angle	MRP (₹)
		6500K (6.5K)	4000K (4K)	3000K (3K)	H	OD	6500K	4000K	3000K		
6W	EL SM CSK 6W SQ 6.5K/4K/3K	420	400	380	43	125x125	>80	>80	>80	120°	1199
12W	EL SM CSK 12W SQ 6.5K/4K/3K	990	940	900	43	175x175	>80	>80	>80	120°	1799
18W	EL SM CSK 18W SQ 6.5K/4K/3K	1530	1450	1380	43	225x225	>80	>80	>80	120°	2299

\*LED Life: 40,000 hrs.

## DECOBATTENS

### MIROTALED NEO




Power (W)	Cat Reference	Rated Lumen Output		Product Dimension		CRI		MRP (₹)
		6500K (6.5K)	3000K (3K)	H	L x W	6500K	3000K	
6W	EL DB MLN 6W 6.5K/3K	600	600	41	300	>80	>80	799
11W	EL DB MLN 11W 6.5K/3K	1000	1000	29	600	>80	>80	999
18W	EL DB MLN 18W 6.5K/3K	1700	1700	29	1200	>80	>80	1199
22W	EL DB MLN 22W 6.5K/3K	2100	2100	29	1200	>80	>80	1499

\*LED Life: 40,000 hrs.



## TUBELIGHTS

### LEDLINE ECO (Retrofit Tubelight)




Power (W)	Cat Reference	Rated Lumen Output			Product Dimension		CRI			MRP (₹)
		6000K (6K)	4000K (4K)	3000K (3K)	L	OD	6000K	4000K	3000K	
18W	EL RTF LTL 18W 6K	1800	On Request	On Request	1200	26	>80			849
20W (Luminated Tubelight)	EL RTF LUX LTL 20W 6K	1920	On Request	On Request	1200	26	>80			999

\*LED Life: 40,000 hrs.

## LED OUTDOOR & INDUSTRIAL


### GRAFIAS (Medium/High Bay)



Power (W)	Cat Reference	Rated Lumen Output	Product Dimension		CRI	Beam Angle	MRP (₹)
		6000K (6K)	H	L x W	6000K		
140W	EL COL 38W 2X2 6K	17200	126	345x345	>70	80°	56000

\*LED Life: 40,000 hrs.

### FLOODLED



Power (W)	Cat Reference	Rated Lumen Output		Product Dimension		CRI	Beam Angle	MRP (₹)
		6500K (6K)	3000K (3K)	H	L x W	6500K		
30W	EL FLD 30W 6K/3K	2550	2250	126	225x185	>70	120°	3300
50W	EL FLD 50W 6K/3K	4250	3850	183	290x236	>70	120°	5500
80W	EL FLD 80W 6K/3K	6800	6200	114	370x290	>70	80°	10000
100W	EL FLD 100W 6K/3K	8500	7800	114	370x290	>70	80°	13000

\*LED Life: 40,000 hrs.

### LED STREET LIGHT



Power (W)	Cat Reference	Rated Lumen Output	CRI	Beam Angle	MRP (₹)
		6000K (6K)	6000K		
20W	EL STR 20W 6K	1900	>70	As Desired	4000
30W	EL STR 30W 6K	2500	>70	As Desired	9000
45W	EL STR 45W 6K	4000	>70	As Desired	14000
60W	EL STR 60W 6K	5500	>70	As Desired	20000
90W	EL STR 90W 6K	8300	>70	As Desired	26000
120W	EL STR 120W 6K	13000	>70	As Desired	34000
150W	EL STR 150W 6K	16000	>70	As Desired	42000
200W	EL STR 200W 6K	24000	>70	As Desired	On Request

\*LED Life: 40,000 hrs.



# LED LIGHTING

## JUNCTION LED

### JUNCTION LED NEO (Round)



Power (W)	Cat Reference	Rated Lumen Output		Product Dimension			CRI		Beam Angle	MRP (₹)
		6000K (6K)	3000K (3K)	H	OD	CO	6000K	3000K		
5W	EL JNL NEO 5W RD 6K/3K	400	380	50	114	102	>80	>80	120°	549

\*LED Life: 40,000 hrs.

### JUNCTION LED (Square/Round)



Power (W)	Cat Reference	Rated Lumen Output		Product Dimension			CRI		Beam Angle	MRP (₹)
		6000K (6K)	3000K (3K)	H	OD/L x W	CO	6000K	3000K		
3W	EL JNL 3W RD 6K/3K EL JNL 3W SQ 6K/3K	240	220	50	92/92x92	63/63x63	>80	>80	120°	499

\*LED Life: 40,000 hrs.

## AMBIENT LIGHTS

### ROPELED STRIPLIGHT



Name	Power	Rated Lumen Output		Product Dimension	Input Voltage	Protection	MRP (₹)
		6000K	3000K	Mtr.			
3528 60 LED/Mtr. 24V	4.8 W/Mtr.	2200	2050	5	12V	IP 66	1799
5050 60 LED/Mtr. 12V	14.8W/Mtr.	5600	5200	5	12V	IP 66	2999
3528 60 LED	4.8 W/Mtr.	2200	2050	5	12V	IP 20	1199
5050 60 LED	14.8W/Mtr.	5600	5200	5	12V	IP 20	2299

4.8W/meter is also available in Red, Green & Blue

### LEDRIE ELECTRONIC DRIVER



Power	Cat Reference	PRI	Product Dimension (Mtr.)		MRP (₹)
12V/3A	EL LDR 12V 3A 36W	220-240V	10 Mtr.	4.8 W/Mtr. IP 66 & IP 20	1950
24V/4A	EL LDR 24V 96W	220-240V	5-10 Mtr.	14.8 W/Mtr. IP 66	3675
12V/2A	EL LDR 12V 2A 24W	220-240V	5 Mtr.	4.8 W/Mtr. IP 66 & IP 20	499
12V/4A	EL LDR 12V 4A 30W	220-240V	5 Mtr.	14.8 W/Mtr. IP 20	999



## METAL HALIDE LAMPS

### MH Single Ended



Lamp (W)	Type	Lumen	Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
		5000K				
70W	Ed55 Clear	5600	0.98A	E27	650	12
150W	Tubular	12000	1.80A	E27	650	12
150W	Tubular	12000	1.80A	E40	650	12
250W*	Tubular	22000	3.00A	E40	750	12
400W*	BT	40000	4.60A	E40	790	12

\*250W & 400W can be used with both sodium based and mercury based ballast with super imposed ignitor.

### MH G12



Lamp (W)	Lumen		Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6000K	3000K				
70W	5500	6000	0.98A	G12	700	12
150W	12000	12500	1.8A	G12	700	12

Ideal for showrooms & garden light applications.

### MH Double Ended



Lamp (W)	Lumen		Lamp Current (mA)	Base Cap	MRP (₹)	Pkg.
	6000K	3000K				
70W	5500	6000	0.98A	R×7s	450	12
150W	12000	14000	1.8A	R×7s	450	12

Ideal for showrooms & garden light applications.

## TL / PL ELECTRONIC BALLAST

### TL Electronic Ballast



Name	Type	MRP (₹)	Pkg.
Bravo	1 x 36W / 40W FTL	190	20

### PL Electronic Ballast



Name	Type	MRP (₹)	Pkg.
Bravo PL EB13	1 x 9W / 11W / 13W CFL	140	20
Bravo PL EB18	1 x 18W CFL	140	20





# LED LIGHTING

## FTL STARTER



### STARTER

Name	Type	MRP (₹)	Pkg.
Universal Starter	FTL/FPL	10	500

## CONSUMER LUMINAIRE

### LUMIA



Type	MRP (₹)	PKG.
1 x 8W T5 FTL	1950	1950
1 x 14W T5 FTL	3675	3675
1 x 28W T5 FTL	499	499
1 x 54W T5 FTL	999	999

45% Energy saving as compared to 40W FTL  
Decorative ultraslim batten with extruded aluminium body and prismatic diffuser  
High power factor > 0.9

### GALAXY



Type	MRP (₹)	PKG.
1 x 14W T5 FTL	510	10
1 x 28W T5 FTL	635	10
1 x 54W T5 FTL	810	10

45% Energy saving as compared to 40W FTL  
Decorative ultraslim batten with extruded aluminium body and prismatic diffuser  
High power factor > 0.9

### ECOMAX



Type	MRP (₹)	PKG.
1 x 14W T5	625	10
1 x 28W T5	625	10


Residential, Banks, Offices, Shops, Airport, Lounges, Malls, Hotels,  
Restaurants & Shopping Complex

### BRITELINE & BRITELINE T5



Type	MRP (₹)	PKG.
1 x 36W T8	490	10
1 x 28W T5	590	10

Slim & decorative batten with Electronic ballast & dual colour end caps  
High power factor > 0.9  
Suitable for T8/T5 FTL

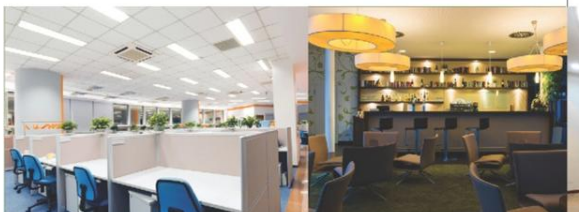

## MAGICON NEO



Type	MRP (₹)	PKG.
1 x 36W / 40W	320	16

Slim & decorative batten with Electronic ballast & dual colour end caps  
High power factor > 0.9  
Suitable for T8/T12 FTL

## RETROFIT CFLS

### MICRA



Lamp (W)	Lumen		Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6500K	2700K				
5W (2U)	220	235	24mA	B22/E27/E14	150	50
8W (3U)	400	425	38mA	B22/E27/E14	165	50
11W(3U)	580	605	53mA	B22/E27/E14	180	50

Ideal for fancy lights, table lamps & downlight applications

### MYLITE



Lamp (W)	Lumen		Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6500K	2700K				
8W (2U)	400	425	38mA	B22	155	50
11W (2U)	580	605	53mA	B22	165	50
14W (2U)	720	800	68mA	B22	170	50
18W (3U)	1050	1100	87mA	B22	215	50
23W (3U)	1350	1400	111mA	B22	250	50

Ideal for bathroom, bedroom, kitchen & living room

### SPIRA



Lamp (W)	Lumen		Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6500K	2700K				
15W (G-24)	850	900	110mA	G-24	230	30
15W	850	900	72mA	B22/E27	230	30
20W	1180	1225	97mA	B22/E27	270	30
23W	1290	1410	111mA	B22/E27	290	30
27W	1575	1600	210mA	B22/E27	300	30

Ideal for bathroom, bedroom, kitchen & living room

### SPIRA T2



Lamp (W)	Lumen		Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6500K	2700K				
5W	250	275	25mA	B22	200	30
8W	425	450	40mA	B22	215	30
12W	625	650	55mA	B22	230	30

Ideal for fancy lights & downlight applications



# LED LIGHTING

## MEGALITE



Lamp (W)	Lumen	Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6500K				
30W 4U	1800	210mA	B22	305	20
36W 4U	2150	240mA	B22	350	20
45W 4U	2475	180mA	B22	560	12
65W 4U	3775	250mA	B22	660	6
85W 4U	4675	280mA	B22/E27/E40	730	6
36W SP	2250	260mA	B22	390	20
45W SP	2750	210mA	B22	670	12
65W SP	3850	280mA	B22	730	6
85W SP	4950	390mA	B22	820	6

85W SP is available in warm white (WW) also

## NON RETROFIT CFLS



### PLL

Lamp (W)	Lumen			Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6500K	4000K	2700K				
18W	1130	1200	1200	385mA	2G-11	140	25
36W	2800	2900	2900	410mA	2G-11	145	25

Ideal for bathroom, kitchen & office applications



### PLC

Lamp (W)	Lumen			Base Cap	MRP (₹)	PKG.
	6500K	4000K	2700K			
10W	565	600	600	G24d1/G24q1	90	25
13W	850	900	900	G24d1/G24q1	115	25
18W	1130	1200	1200	G24d2/G24q2	120	25

Ideal for bathroom, bedroom, kitchen & living room applications




### PLS

Lamp (W)	Lumen			Base Cap	MRP (₹)	PKG.
	6500K	4000K	2700K			
9W	565	600	600	G-23/G27	90	25
11W	850	900	900	G-23/G27	95	25

Ideal for bathroom, bedroom, kitchen & living room



### FTL-T5



Lamp (W)	Lumen			Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
	6500K	4000K	2700K				
	6500K	4000K	2700K				
14W	1100	1200	1200	0.7mA	G5	135	30
28W	2400	2600	2600	1.4mA	G5	140	30

Ideal for bedroom kitchen & drawing room

### HALOGEN



Lamp (W)	Lumen 2700K	Lamp Current (mA)	Base Cap	MRP (₹)	PKG.
500W	9000	2.08	Rx7s	65	50
1000W	22000	4.17	Rx7s	90	50


Ideal for banquet halls, outdoor, industrial & temporary lighting applications







# ENERGISING SMILES

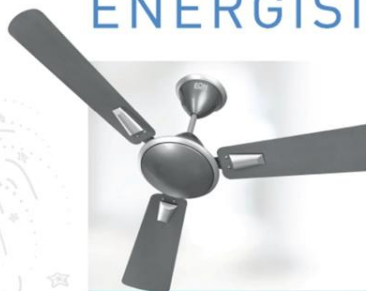

**FANS**  
Enjoy EON Breeze



**LED LIGHTING**  
Celebrating Life







## WATER HEATERS

Indulge to Rejuvenate & Refresh




## WIRES & CABLES

Fire-proof your smiles



## MOBILE ACCESSORIES

The Power that Keeps You Going

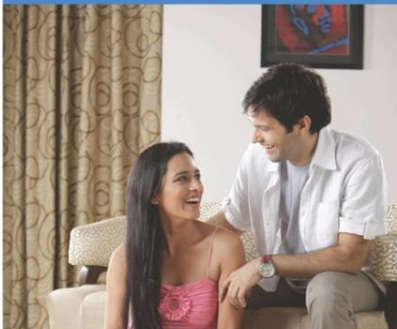

Our  
Core  
Values

WE

Innovate

Deliver  
Promise

Learn

Care

## Our Network

### North

#### CHANDIGARH

Zirakpur Ambala Highway,  
Near Mars Godown,  
Village-Prabhat  
Zirakpur, District-Mohali 140603  
Mob.: 09815959896  
E: chandigarh@eonelectric.com

#### JAIPUR

529, Alankar Plaza,  
A-10 Central Spine  
Vidyadhar Nagar, Jaipur-302023  
Mob.: 09929708140  
E: jaipur@eonelectric.com

#### LUCKNOW

201, 2nd Floor,  
Sky-Hi Chamber-5, Park Road,  
Hazratganj, Lucknow-226001  
Mob.: 09793441100  
E: lucknow@eonelectric.com

#### DELHI / DELHI NCR

B-88, Sector-83  
Noida-201305  
Mob: 08826398880  
E: delhi@eonelectric.com

#### WEST (U.P)

Plot No. 10, Sector-4,  
I.I.E., Sidcul, Haridwar-249403  
Uttarakhand  
Mob: 09899144025  
E: wup@eonelectric.com

### East

#### KOLKATA

Innovative Logistics Service Pvt. Ltd.  
BBT Road, Maheshtala  
Puratan Dakshghar,  
Near 13C Bus Stand  
Kolkata-700141  
Mob.: 09830054411  
Ph.: 0120-3096700, 3096701  
E: kolkata@eonelectric.com

#### ORRISA

Plyus Enterprises  
Madhupatna  
Near Samrat Cinema  
Cuttack-753013  
Ph.: 0120-3096700, 3096701  
E: orrisa@eonelectric.com

#### PATNA

RK Palace  
1st Floor Main Road, Peermohani  
Patna-800003  
Mob: 09905784884  
E: patna@eonelectric.com

#### RANCHI

Satman Nagar, Road No-1  
Near Imam Kothi, Kokar  
Ranchi-834009  
Mob: 09852113524  
Ph.: 0120-3096700, 3096701  
E: ranchi@eonelectric.com

### West

#### AHMEDABAD

709-710, AKIK Tower  
Opp. Rajpath Club  
S.G. Highway  
Ahmedabad-380054  
Mob.: 09909008700  
E: ahmedabad@eonelectric.com

#### INDORE

1-Golden Place  
Colony Tejpur  
Garbadi A.B. Road  
Indore-452012  
Mob.: 09893218227  
E: indore@eonelectric.com

#### MUMBAI

Logis-Tech India Pvt. Ltd.  
796/1 Kanchan Compound  
Dhapoda Road  
Near Sapna Hotel Rehal  
Thane, Bhiwandi-421302  
Mob.: 09322811521  
E: mumbai@eonelectric.com

#### RAIPUR

Gangamaa Temple Road  
Near Banjari Mata Mandir  
Bhenpuri  
Raipur-492001  
Mob.: 09826166664  
E: raipur@eonelectric.com

### South

#### BENGALURU

303, 3rd Floor, Blue Cross  
Chambers Infantry  
Cross Road  
Bengaluru-560001  
Mob.: 09035197021  
09066491361  
E: bengaluru@eonelectric.com

#### CHENNAI

Innovative Logistics Service  
Pvt. Ltd.  
No. 12, V.G.P. Complex  
Vijayashanthu Apartments  
Next Chettyedu  
Chennai-602105  
Mob.: 09384659017  
E: chennai@eonelectric.com

#### COCHIN

5th Floor, J.B. Manjooran Estate  
Door No. 50/1107/A-13  
Edapally Railway Station Road  
Edapally, Bye Pass Junction  
Cochin-682024  
Mob.: 09745031800  
E: cochin@eonelectric.com

## EON Electric Limited

(Formerly Indo Asian Fusegear Limited)  
(An ISO 9001:2008 certified company)

### Corporate Office

B-88, Sector-83, Noida-201305, Uttar Pradesh, India P: +91-120-3096700  
W: www.eonelectric.com

### Plant

Plot No. 10, Sector-4, I.I.E., Sidcul, Haridwar-249403  
Uttarakhand, Ph.: 133-4663215



24x7  
HOURS

365  
DAYS

**1800-3000-7808**  
**8800-12-3473**

**CUSTOMER CARE**  
customer@eonelectric.com