

ARMSTRONG®

Trust and Quality

RANGE OF PERFORMANCE (Including customized model)



Capacity: 4.5~480m³/h

Head: 5~125 m

Inlet Diameter: 32~200 mm

Outlet Diameter: 20~150 mm

Power: 0.75~132 kW

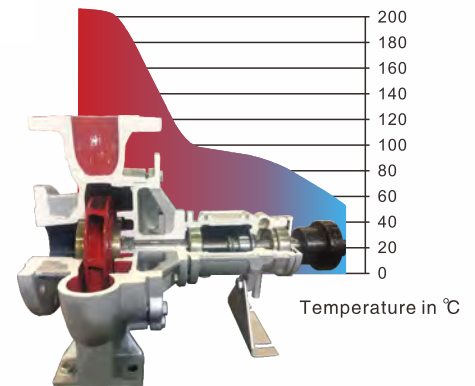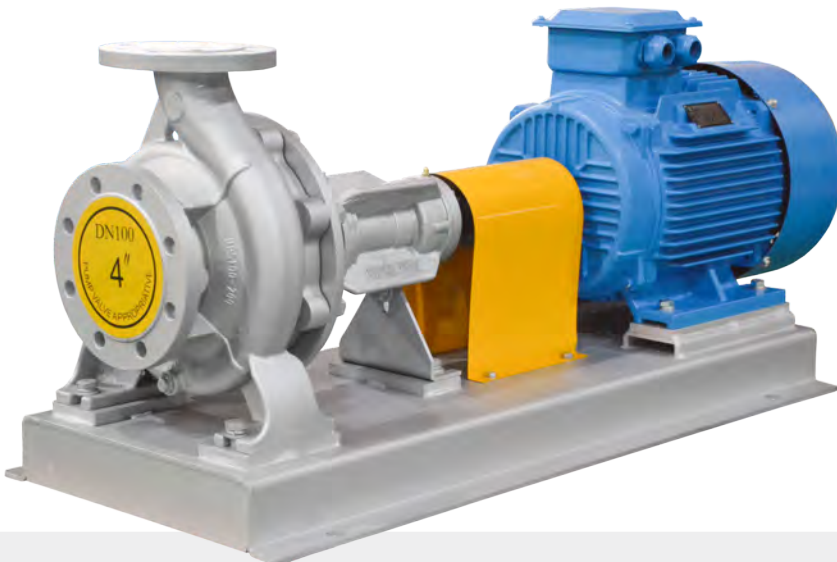

APPLICATIONS

Thermal oil pumps capable of handling temperatures up to 350°C in heat transfer plants without the necessity for external cooling of the pump.

The fluids pumped must have lubricating properties and should not contain any solids or abrasive particles, as the non drive end bearing and mechanical seal is lubricated by the pumped liquid.

- Chemical and Pharmaceutical Industries
- Mineral Oil
- Food, Laundries and Textile
- Leather and Paper
- Wood Manufacturing
- Paint and Lacquer
- Building, Tar and Bitumen
- Electrical Engineering Industries

FEATURES

LQRYN thermal oil pump is rating to EN733 (DIN24255) standard design. It is an upgrade design based on LQRY series.

The unique heat dissipation design of the bearing housing ensures a reduced temperature at the dynamic seal (or mechanical seal) faces and the bearings.

Back pull out for ease of maintenance.

These pumps are further equipped with a safety stuffing box and throttling area in front of the dynamic seal (or mechanical seal). In case of a seal failure this prevents the pumped liquid from emerging in a hazardous quantity or manner. With drain connection adequate piped up, the safety requirements of DIN 4754 are exceeded. (The pumps have a drain connection to ensure that any seepage past the shaft sealing can be safely drained through this connection). High temperature bearings are fitted where applicable.

No special motor or coupling guard required due to unique heat dissipation design.



LQRYN Hot Oil Pump

PERFORMANCE TABLE

Pump model	Suction	Discharge	60HZ 3600rpm					
			Rated Flow	Rated Head	Speed	Motor	Efficiency	NPSHR
	mm	mm	m³/h	m	RPM	kW	%	m
LQRYN32-20-130	32	20	5.40	28.80	3600	1.5	46	2.88
LQRYN32-20-120	32	20	4.87	23.41	3600	0.75	45	3.54
LQRYN32-20-160	32	20	5.40	46.08	3600	2.2	41	2.88
LQRYN32-20-150	32	20	5.14	41.75	3600	2.2	39	3.18
LQRYN40-25-130	40	25	7.56	28.80	3600	1.5	46	2.88
LQRYN40-25-120	40	25	6.93	24.20	3600	1.1	45	3.43
LQRYN40-25-160	40	25	7.56	46.08	3600	3	41	2.88
LQRYN40-25-150	40	25	7.20	41.75	3600	2.2	39	3.18
LQRYN40-25-200	40	25	7.56	72.00	3600	5.5	36	2.88
LQRYN40-25-190	40	25	7.30	67.05	3600	4	35	3.09
LQRYN40-25-180	40	25	6.80	58.32	3600	4	35	3.56
LQRYN40-25-170	40	25	6.54	53.87	3600	3	35	3.58
LQRYN50-32-140	50	32	15.00	28.80	3600	3	51	2.88
LQRYN50-32-130	50	32	13.70	24.01	3600	2.2	50	3.45
LQRYN50-32-170	50	32	15.00	46.08	3600	5.5	46	2.88
LQRYN50-32-150	50	32	13.64	38.08	3600	4	44	3.48
LQRYN50-32-200	50	32	15.00	72.00	3600	11	39	2.88
LQRYN50-32-190	50	32	14.46	66.92	3600	7.5	38	3.10
LQRYN50-32-180	50	32	13.69	59.99	3600	7.5	38	3.46
LQRYN50-32-250	50	32	15.00	115.20	3600	15	33	2.88
LQRYN50-32-230	50	32	14.28	104.45	3600	15	32	3.18
LQRYN50-32-220	50	32	13.63	95.05	3600	15	30	3.49
LQRYN65-50-130	65	50	30.00	28.80	3600	4	62	2.88
LQRYN65-50-120	65	50	27.43	24.07	3600	3	61	3.45
LQRYN65-50-170	65	50	30.00	46.08	3600	7.5	57	2.88
LQRYN65-50-160	65	50	28.57	41.80	3600	7.5	56	3.18
LQRYN65-50-150	65	50	27.32	38.22	3600	5.5	56	3.47
LQRYN65-40-200	65	40	30.00	72.00	3600	15	52	2.88
LQRYN65-40-190	65	40	28.94	67.00	3600	11	50	3.09
LQRYN65-40-250	65	40	30.00	115.20	3600	22	46	2.88
LQRYN65-40-240	65	40	28.56	104.41	3600	18.5	45	3.18
LQRYN65-40-220	65	40	27.12	94.14	3600	18.5	44	3.52
LQRYN65-40-320	65	40	30.00	180.00	3600	45	39	2.88
LQRYN65-40-300	65	40	28.96	167.76	3600	37	38	3.09
LQRYN65-40-280	65	40	26.42	139.55	3600	30	37	3.71
LQRYN80-65-140	80	65	60.00	28.80	3600	7.5	69	2.88
LQRYN80-65-130	80	65	56.57	25.60	3600	7.5	67	3.24
LQRYN80-65-170	80	65	60.00	46.08	3600	15	67	2.88
LQRYN80-65-160	80	65	57.24	41.94	3600	11	65	3.16
LQRYN80-65-150	80	65	54.48	38.00	3600	11	65	3.49
LQRYN80-50-180	80	50	53.53	57.31	3600	15	61	3.62
LQRYN80-50-250	80	50	60.00	115.20	3600	37	53	2.88
LQRYN80-50-240	80	50	57.14	104.49	3600	37	52	3.18
LQRYN80-50-220	80	50	54.29	94.30	3600	30	50	3.52
LQRYN80-50-320	80	50	60.00	180.00	3600	75	50	2.88
LQRYN80-50-300	80	50	57.74	166.67	3600	75	48	3.11
LQRYN80-50-280	80	50	53.96	145.60	3600	55	47	3.56
LQRYN100-80-140	100	80	120.00	28.80	3600	15	73	6.05
LQRYN100-80-130	100	80	113.14	25.60	3600	15	71	6.80
LQRYN100-80-180	100	80	120.00	46.08	3600	22	73	6.19
LQRYN100-80-170	100	80	114.61	42.03	3600	18.5	71	6.79



LQRYN Hot Oil Pump

PERFORMANCE TABLE


Pump model	Suction	Discharge	60HZ 3600rpm					
			Rated Flow	Rated Head	Speed	Motor	Efficiency	NPSHR
			m³/h	m	RPM	kW	%	m
LQRYN100-80-160	100	80	109.21	38.17	3600	18.5	71	6.82
LQRYN100-65-220	100	65	120.00	72.00	3600	37	72	5.62
LQRYN100-65-210	100	65	115.64	66.86	3600	37	70	6.05
LQRYN100-65-190	100	65	107.45	57.73	3600	30	70	7.00
LQRYN100-65-250	100	65	120.00	115.20	3600	75	68	5.18
LQRYN100-65-240	100	65	114.46	104.81	3600	55	65	5.70
LQRYN100-65-230	100	65	108.46	94.11	3600	45	64	6.35
LQRYN100-65-320	100	65	120.00	180.00	3600	110	62	4.61
LQRYN100-65-300	100	65	115.47	166.67	3600	90	61	4.98
LQRYN100-65-280	100	65	107.92	145.60	3600	75	60	5.70
LQRYN125-100-200	125	100	219.55	60.25	3600	55	74	8.60
			109.78	15.06	1750	7.5	71	2.15
LQRYN125-100-190	125	100	204.48	52.27	3600	45	72	9.92
			102.24	13.07	1750	5.5	69	2.48
LQRYN125-100-270	125	100	240.00	115.20	3600	110	75	6.48
			120.00	28.80	1750	15	72	1.62
LQRYN125-100-260	125	100	232.37	107.99	3600	110	73	6.91
			116.18	27.00	1750	15	70	1.73
LQRYN125-100-250	125	100	225.58	101.78	3600	90	71	7.33
			112.79	25.44	1750	15	68	1.83
LQRYN125-100-240	125	100	217.95	95.00	3600	90	71	7.86
			108.98	23.75	1750	11	68	1.96
LQRYN125-100-320	125	100	120.00	45.00	1750	22	69	1.62
LQRYN125-100-300	125	100	115.68	41.82	1750	22	68	1.74
LQRYN125-100-280	125	100	216.22	146.09	3600	132	70	7.98
			108.11	36.52	1750	18.5	67	2.00
LQRYN125-100-400	125	100	120.00	72.00	1750	45	55	3.60
LQRYN125-100-380	125	100	112.54	63.32	1750	37	54	4.09
LQRYN125-100-360	125	100	107.08	57.33	1750	37	53	4.52
LQRYN150-125-280	150	125	240.00	28.80	1750	30	77	4.18
LQRYN150-125-275	150	125	235.76	27.79	1750	30	78	4.33
LQRYN150-125-270	150	125	226.43	25.64	1750	22	77	4.69
LQRYN150-125-260	150	125	223.04	24.87	1750	22	75	4.84
LQRYN150-125-250	150	125	417.24	87.05	3600	132	76	22.11
			208.62	21.76	1750	18.5	74	5.53
LQRYN150-125-320	150	125	240.00	46.08	1750	45	75	6.48
LQRYN150-125-300	150	125	227.03	41.23	1750	37	73	7.24
LQRYN150-125-290	150	125	207.57	34.47	1750	30	72	8.66
LQRYN150-125-400	150	125	240.00	72.00	1750	75	70	3.31
LQRYN150-125-380	150	125	227.34	64.60	1750	75	68	3.69
LQRYN150-125-360	150	125	207.19	53.66	1750	55	67	4.44
LQRYN200-150-250	200	150	480.00	28.80	1750	55	79	6.48
LQRYN200-150-240	200	150	453.63	25.72	1750	45	79	7.26
LQRYN200-150-230	200	150	414.95	21.52	1750	37	79	8.67
LQRYN200-150-320	200	150	480.00	46.08	1750	90	79	5.04
LQRYN200-150-300	200	150	453.58	41.15	1750	75	77	5.64
LQRYN200-150-280	200	150	415.41	34.51	1750	55	76	6.73
LQRYN200-150-400	200	150	480.00	72.00	1750	132	78	5.04
LQRYN200-150-380	200	150	454.68	64.60	1750	110	76	5.62
LQRYN200-150-360	200	150	414.39	53.66	1750	90	75	6.76

Important: The motor power are calibrated for SG = 0.9g/cm³. Consult sales if your medium exceeds this value.



LQRYN Hot Oil Pump

CONSTRUCTION

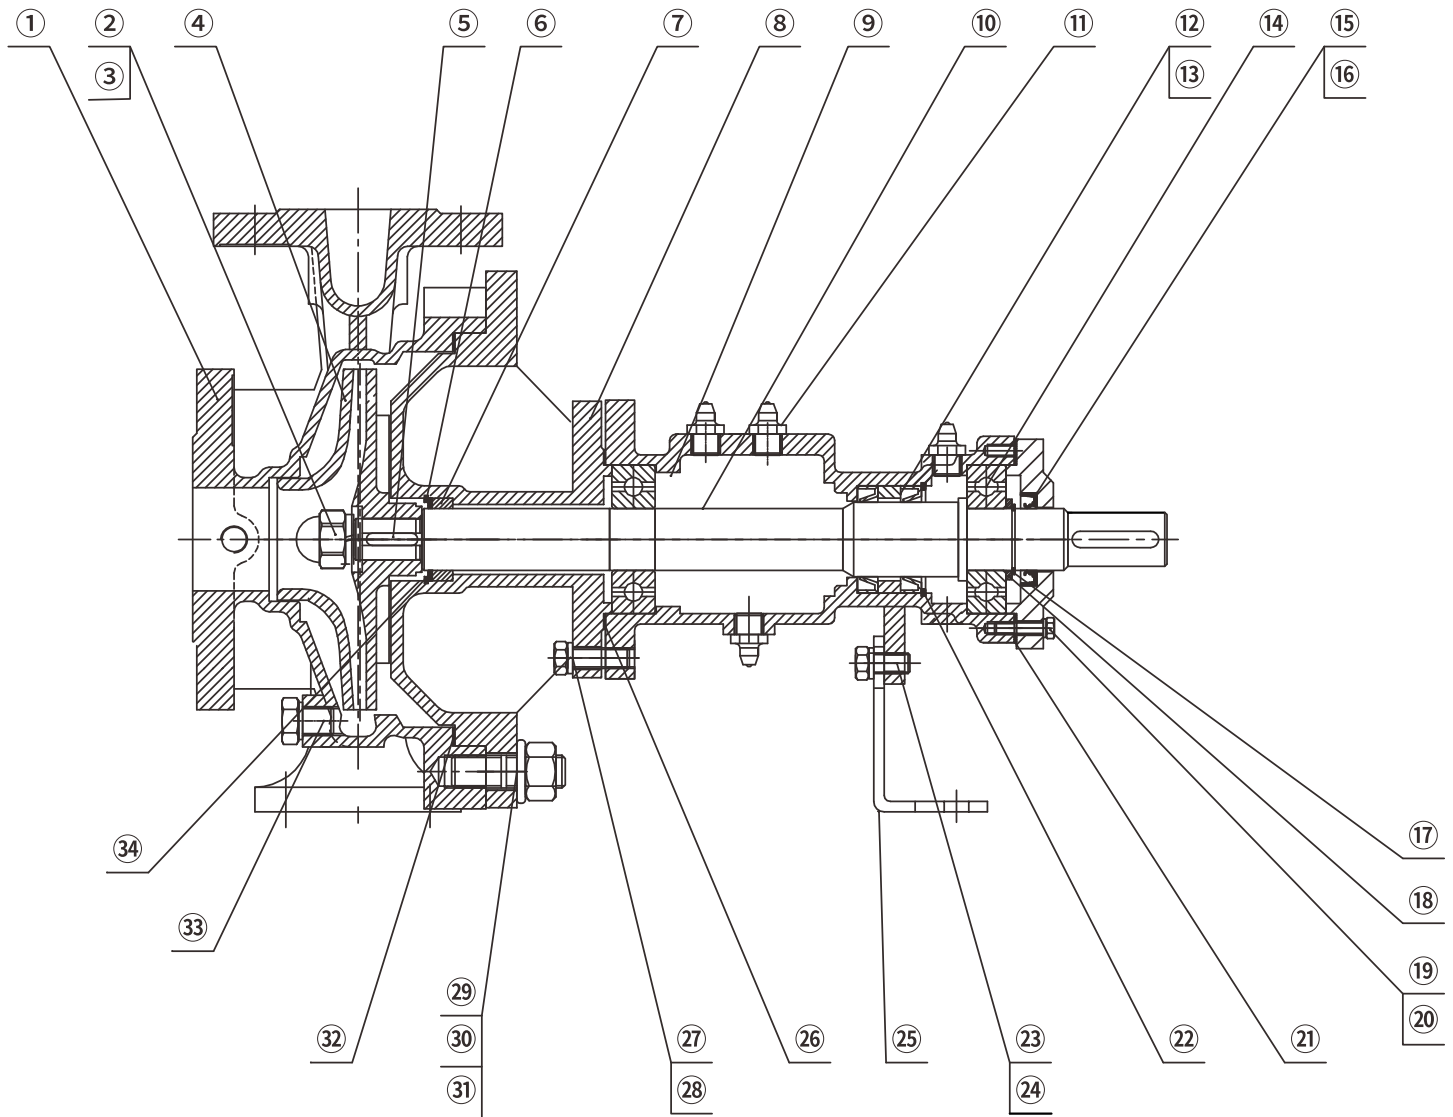

Item	Description	Item	Description	Item	Description	Item	Description
①	Pump Casing	⑩	Shaft	⑲	Bolt	⑳	Spring Washer
②	Impeller Nut	⑪	Plug	⑳	Spring washer	㉑	Washer
③	Washer	⑫	Dynamic Seal	㉑	Gasket	㉒	Nut
④	Impeller	⑬	Retaining Ring	㉒	Snap Ring	㉓	Stub
⑤	Key	⑭	Bearing	㉓	Bolt	㉔	Gasket
⑥	Snap Ring	⑮	Bearing Cover	㉔	Washer	㉕	Plug
⑦	Graphite Seal	⑯	Oil Seal	㉕	Support	㉖	Retaining Ring
⑧	Pump Cover	⑰	Snap Ring	㉖	Gasket		
⑨	Bearing Housing	⑱	Retaining Ring	㉗	Bolt		