


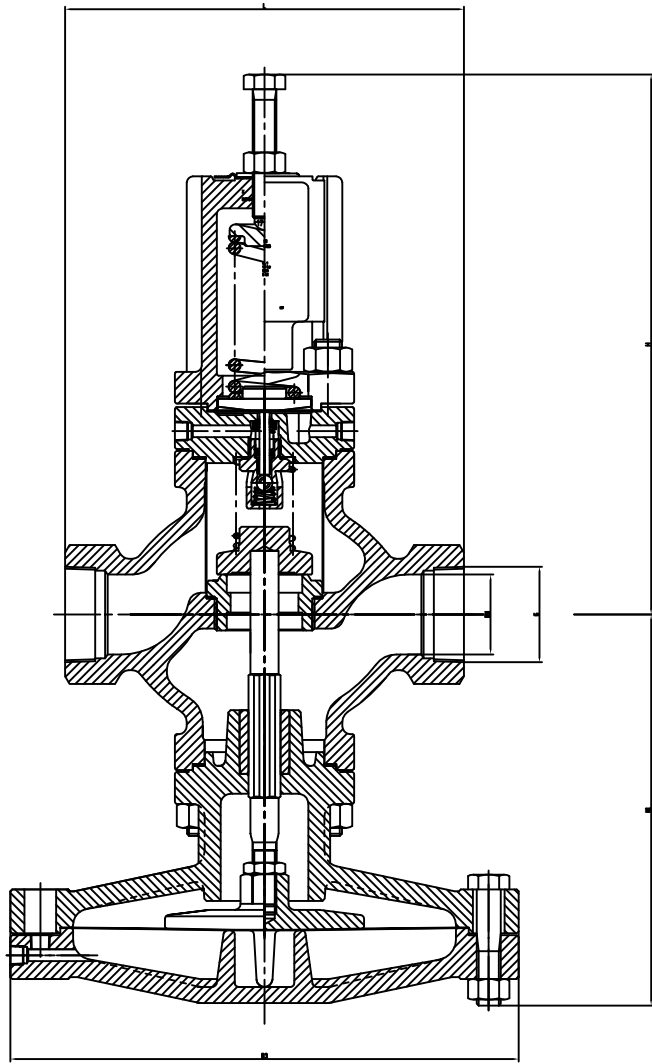

	L	H1	H	D3	BSPP
DN (mm)	1.6MPa/2.5MPa				
15	150	135	220	185	1/2
20	150	135	225	185	3/4
25	160	145	235	210	1
32	180	155	235	210	1 1/4
40	200	175	240	255	1 1/2
50	230	185	245	255	2

Nominal pressure	1.6
Strength	2.4
Sealing	1.8
Suit medium/°C	steam/≤250℃

Techno-request	
Design standard	GB/T12244
Flanged ends	ANSI B16.5
Test&inspection	GS/T1224~46

12	Regulating spring	60Si2Mn
11	Small spring	50CrVA
10	Main valve spring	50CrVA
9	Diaphragm	301
8	Guide seat	2Cr13
7	Bushing	2Cr13
6	Stem	1Cr17Ni2
5	Disc	2Cr13
4	Seat	2Cr13
3	Body	WCB
2	Diaphragm cover	WCB
1	Diaphragm lower cover	WCB
No.	Name	Material

VMV Zhejiang Newton Fluid Control Co., LTD		
DRAWN:		Assembling
CHECKED:		
APPROVED:		
DATE:		
PROPORTION:		FIG NO: DP17-16C