
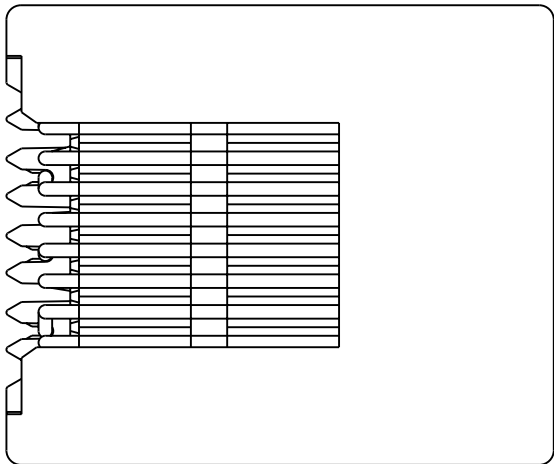


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
1R	-		AF	ECR-10-020218	21JUN2011	PS	RRP


D

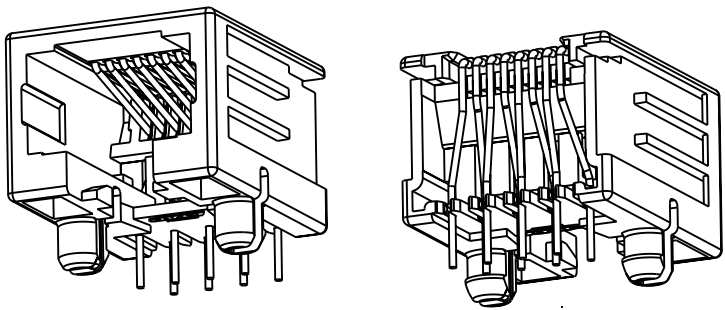



NOTES:

- 1 TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0,15$.
- 2 FOR THIS PACKAGING METHOD THE TRUE POSITION OF THE SOLDER TINES IS NOT GUARANTEED.
- 3 SUPERSEDED BY 1-215877-3


C

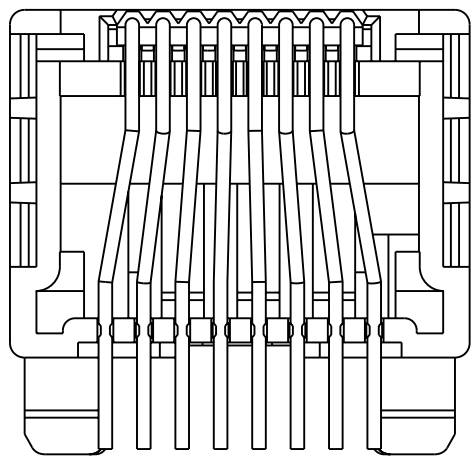

2,54
1,27 TYP.
8,9

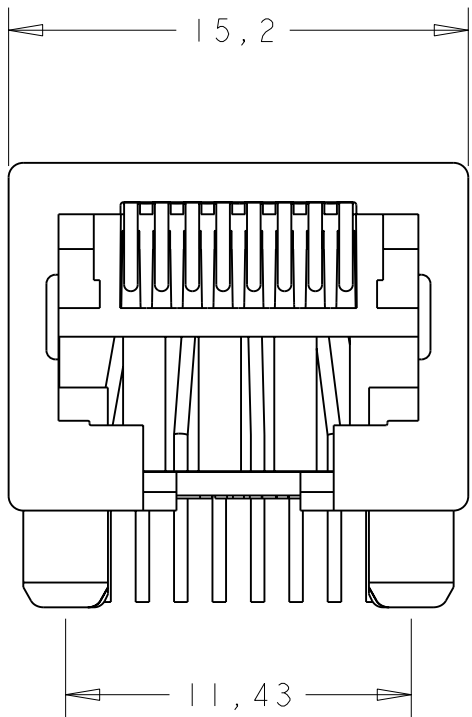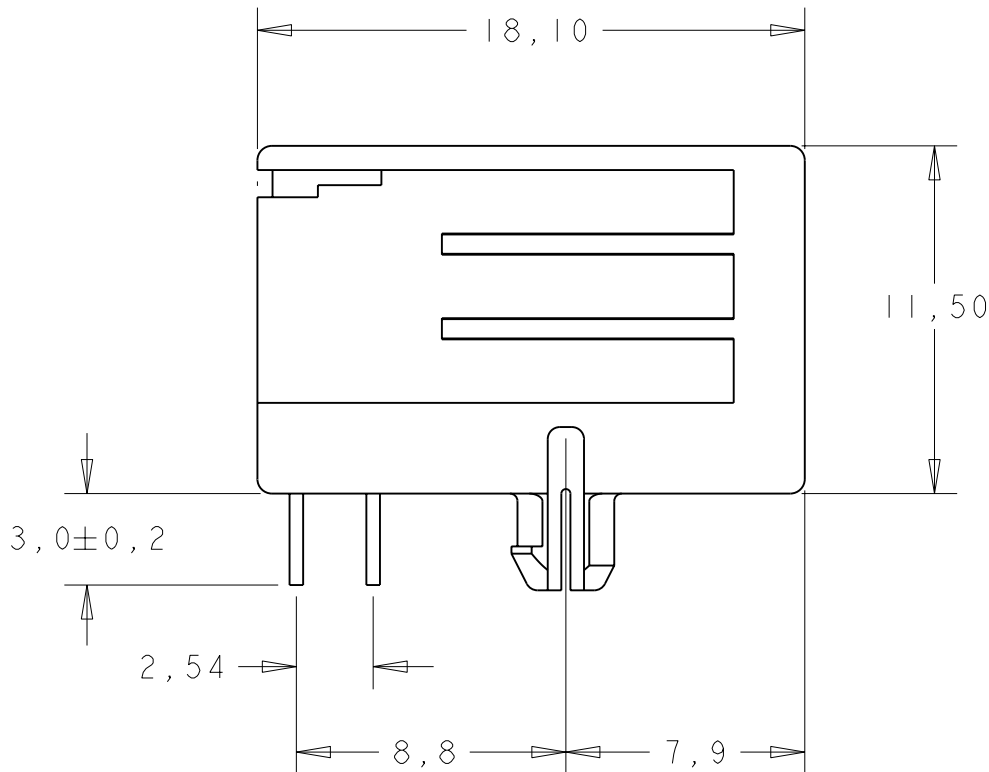


B

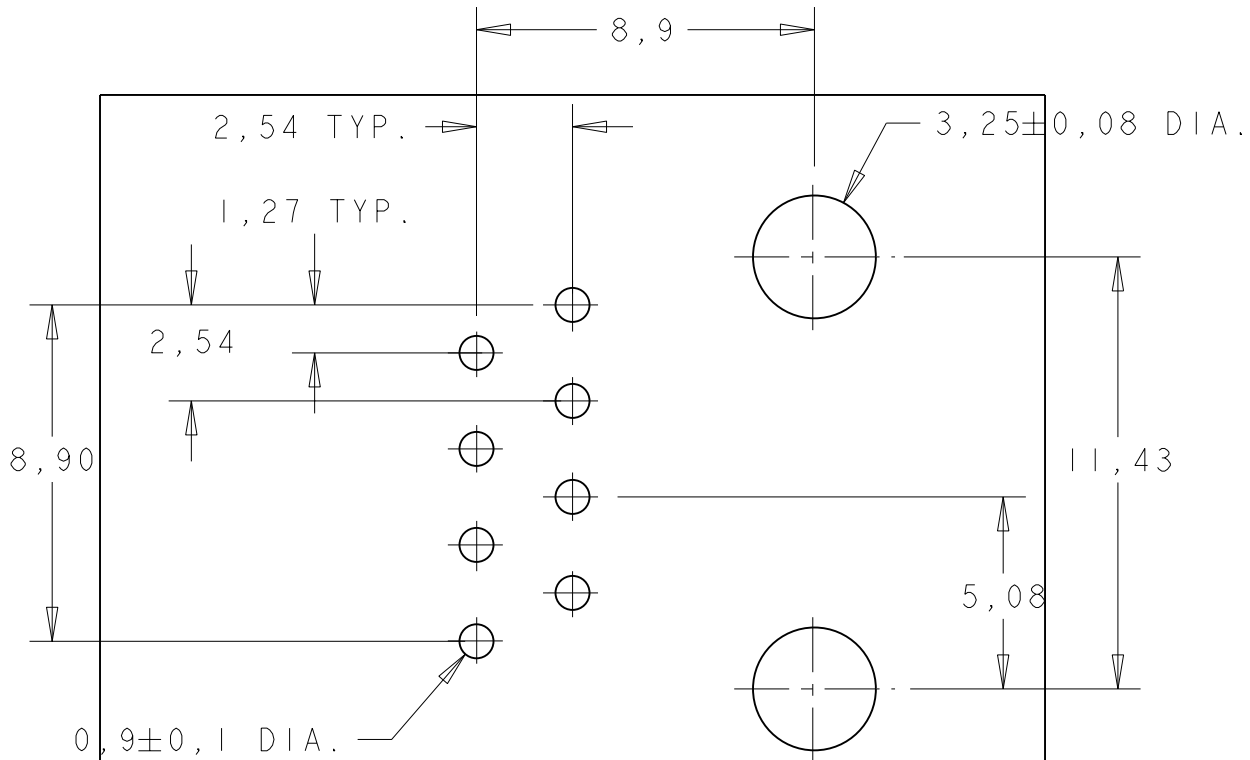

PRINTED CIRCUIT BOARD LAYOUT



[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.
TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0,05$

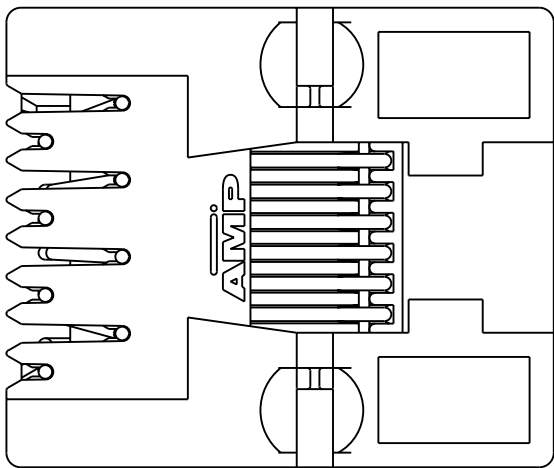

2	1000 PIECES BULK PACKAGED	8 POS. / 8 CONTACTS	OVERALL: Ni 1,27µm MIN. ALL OVER THE CONTACTS SOLDER ZONE: Sn 2,5µm MIN. ON THE SOLDER ZONE OF THE CONTACT MATING ZONE: PLATING CONFIRMS TO PRODUCT REQUIREMENTS AS PER SPECIFICATION 108-19064	HOUSING COLOR: BLUE RAL 5017	4-215877-1
	200 PIECES IN A TRAY			HOUSING COLOR: GREY RAL 7035	3-215877-1
	3			HOUSING COLOR: BLACK PBT: UL 94V-0 CONTACT INSERT: PBT: UL 94V-0 CONTACTS: ph BRONZE	2-215877-1
	TAPE MOUNTED 700 PCS./REEL				1-215877-3
					215877-1
	PACKAGING	REMARKS	FINISH	MATERIAL	ORDER NUMBER






THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
DIMENSIONS:		APVD	NAME			
mm		PRODUCT SPEC				
		APPLICATION SPEC	MODULAR JACK, 8 POS SIDE ENTRY FOR PRINTED CIRCUIT BOARD			
		WEIGHT				
MATERIAL		CUSTOMER DRAWING	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			A2		C-215877	-
			SCALE	SHEET	OF	REV
			4:1	1	2	AF

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
1R	-		-	SEE SHEET 1	-	-	-

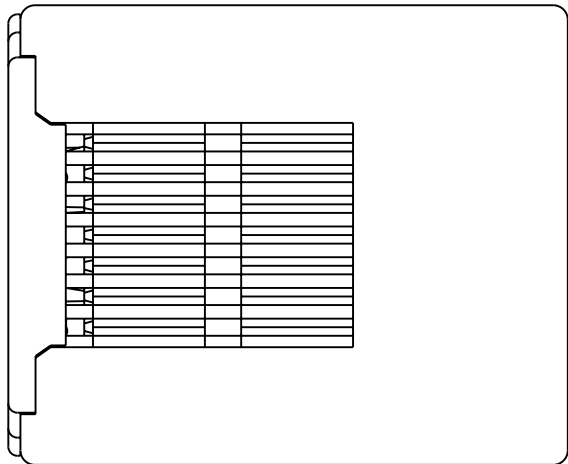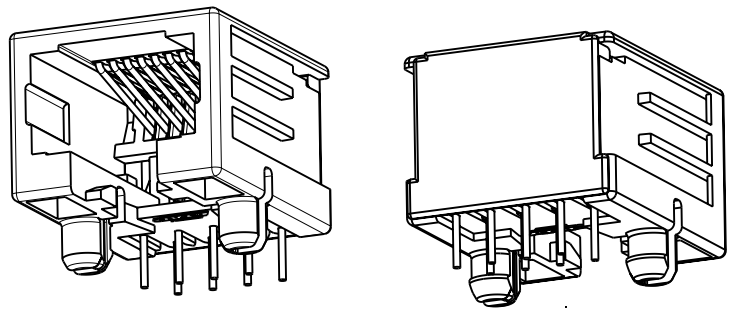

NOTES:

- 1 TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0,15$.
- 2 FOR THIS PACKAGING METHOD THE TRUE POSITION OF THE SOLDER TINES IS NOT GUARANTEED.

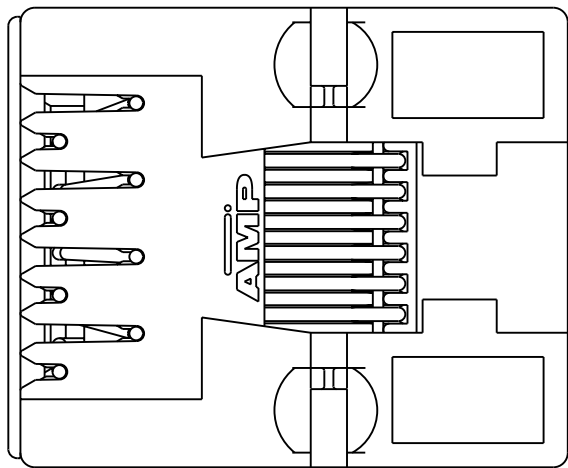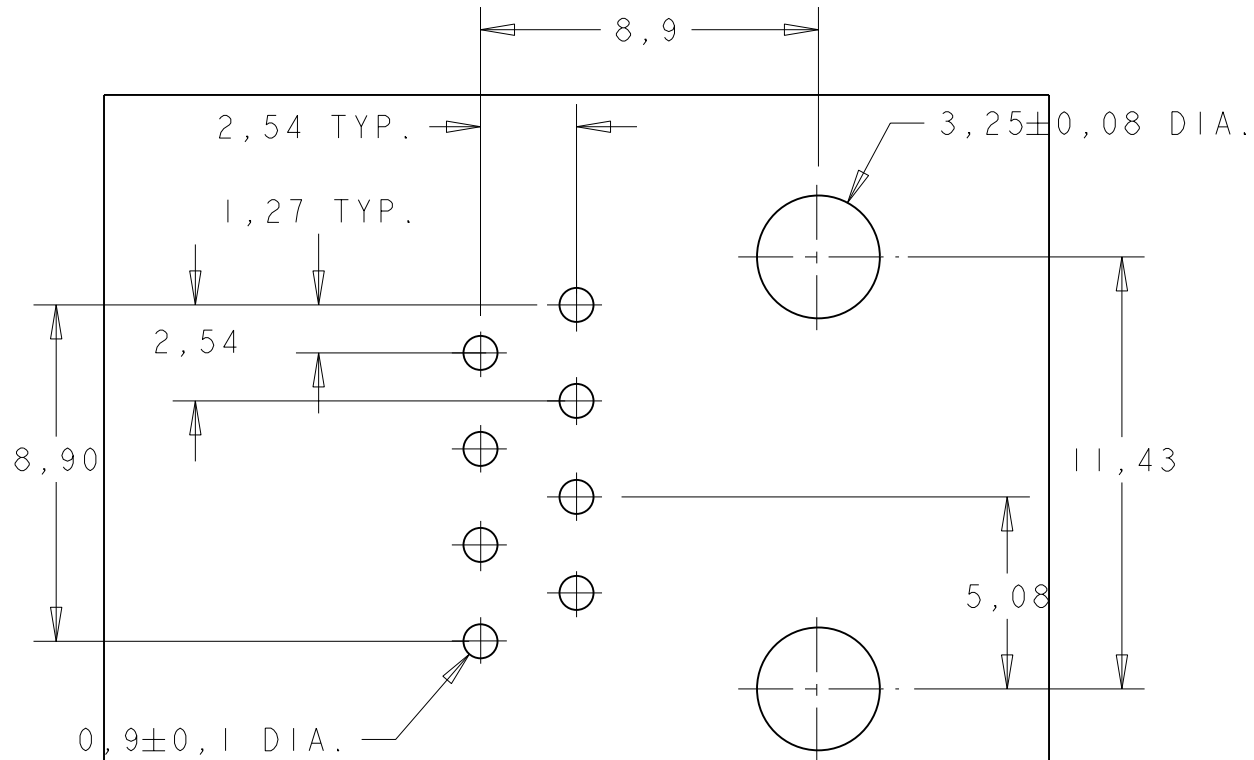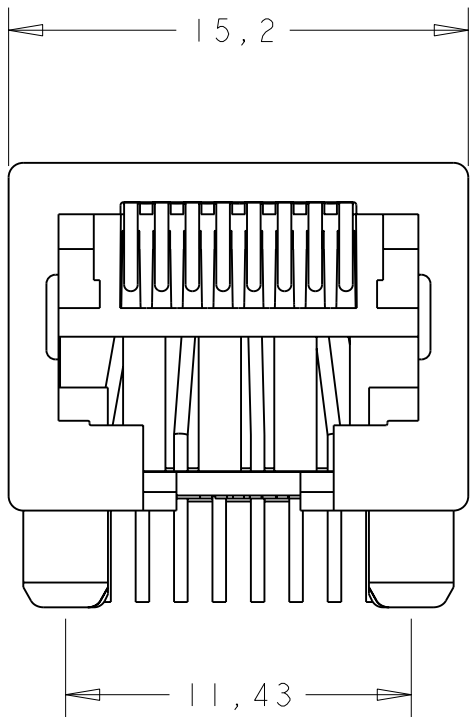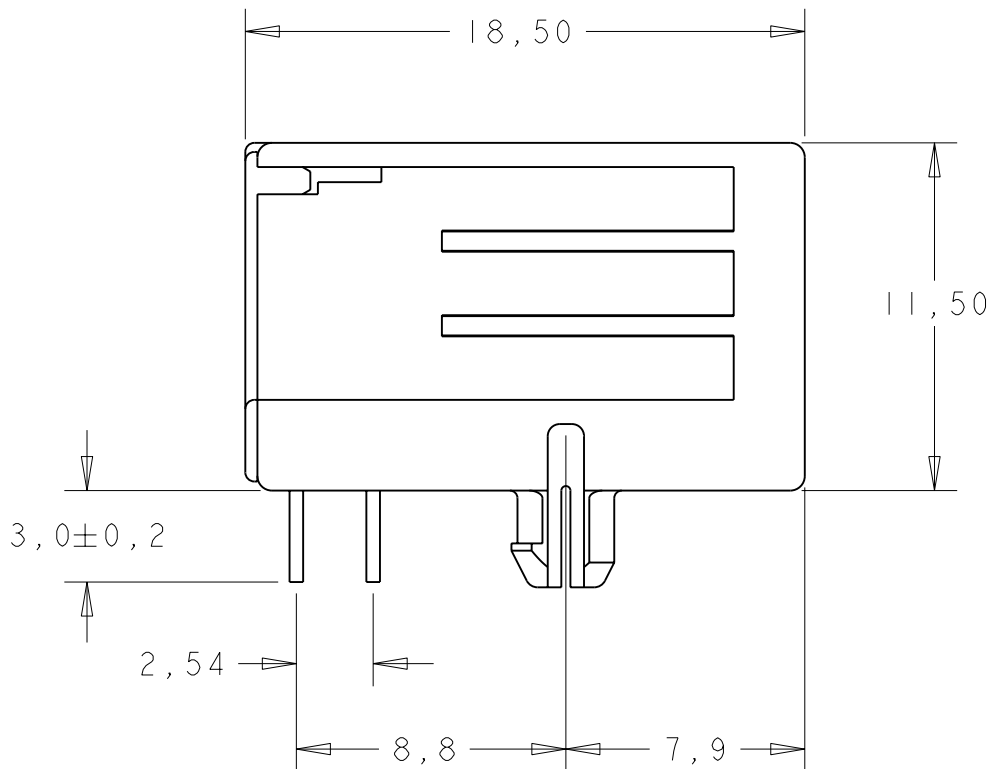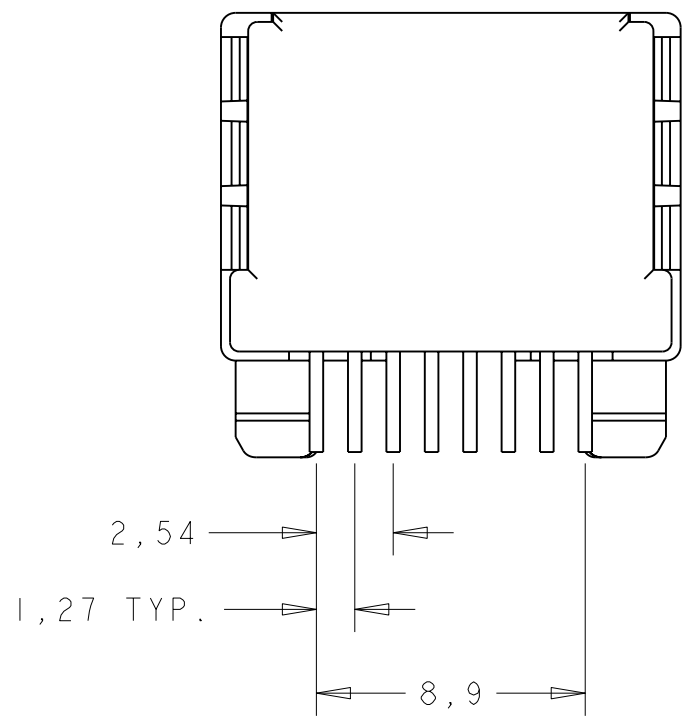

2	1000 PIECES BULK PACKAGED	8 POS./ 8 CONTACTS	IN CONTACT AREA: 1,2µm MIN. SEL. GOLD OVER 1,2µm MIN. NICKEL. SOLDER TINES: 2,5µm MIN. TIN OVER 1,2µm MIN. NICKEL.	HOUSING COLOR: BLACK PBT, UL 94V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACT COVER: BLACK PBT, UL 94V-0 CONTACTS: PH BRONZE	INACTIVE 5-215877-3 NOT TOOLED
	200 PIECES IN A TRAY				INACTIVE 5-215877-2 NOT TOOLED
	TAPE MOUNTED 700 PCS./REEL				INACTIVE 5-215877-1 NOT TOOLED
	PACKAGING	REMARKS	FINISH	MATERIAL	ORDER NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD	NAME			
		PRODUCT SPEC	MODULAR JACK, 8 POS SIDE ENTRY FOR PRINTED CIRCUIT BOARD			
		APPLICATION SPEC				
		WEIGHT				
		CUSTOMER DRAWING				
		SCALE	4:1			
		SHEET	2 OF 2			
		REV	AF			