



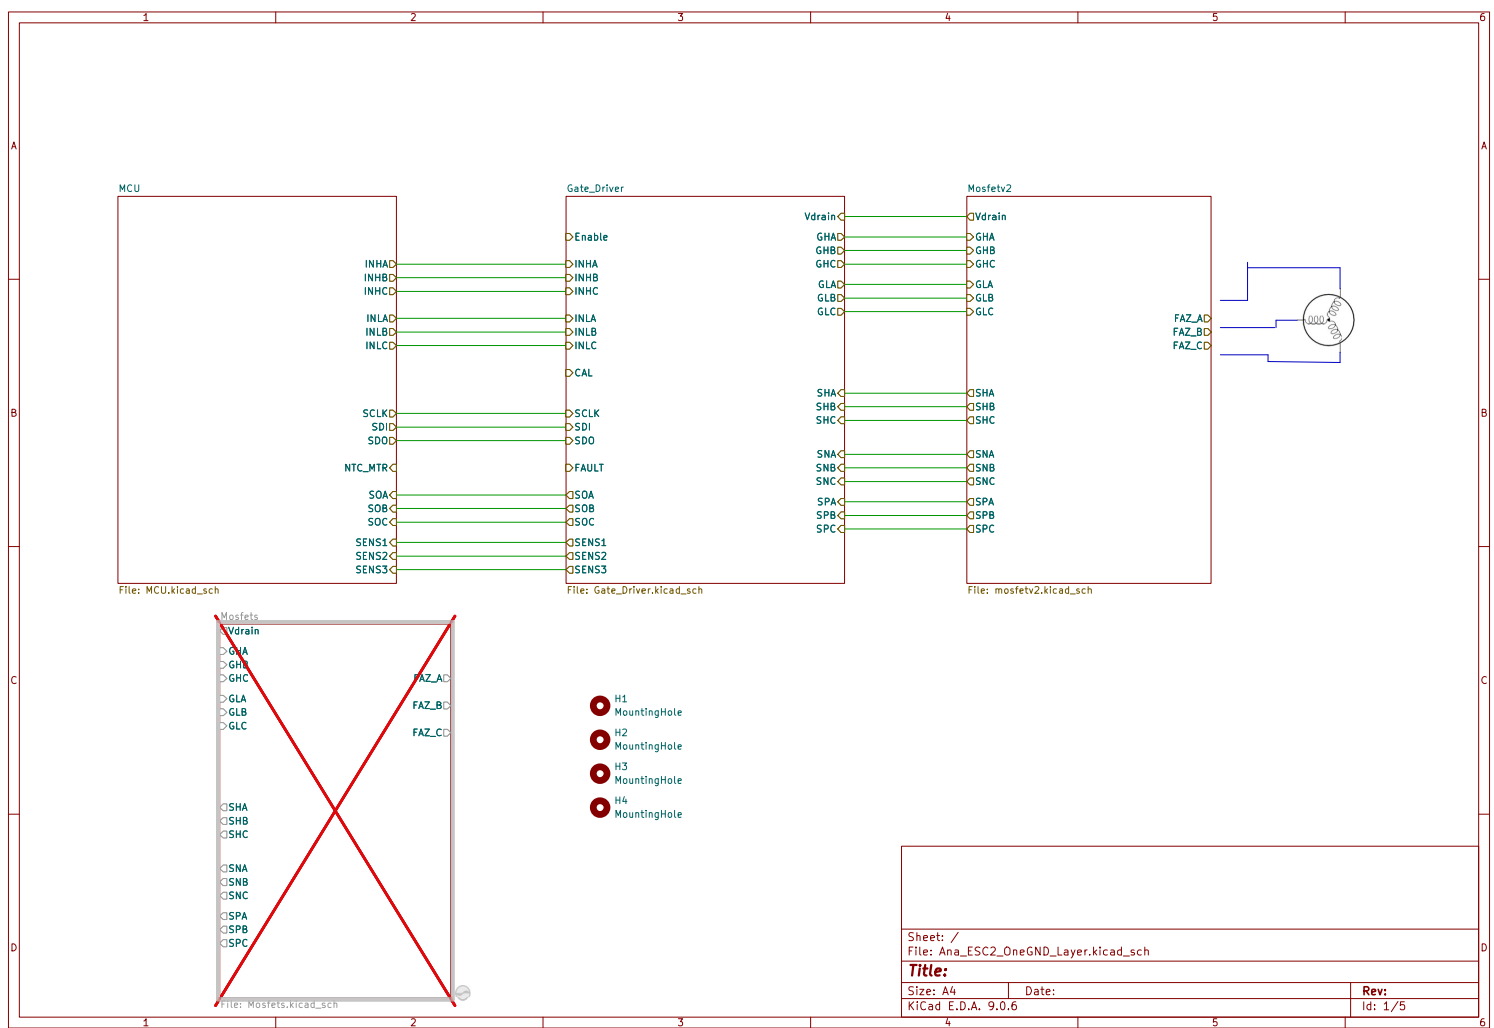

DNP

dirençten kılıfı belirsiz kapasitör alınabilir 680uF 63V
boyutu 21x13

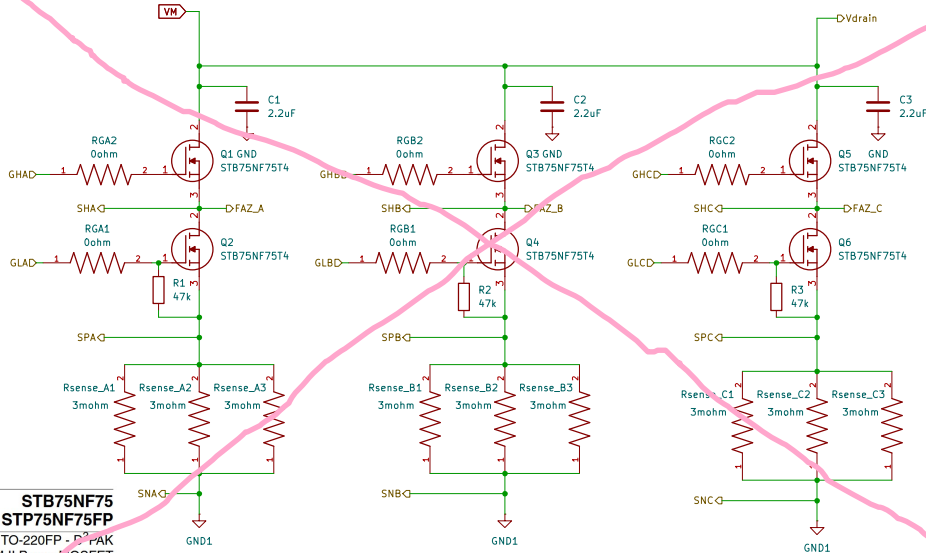

3mohm = 0.00297 ohm - 0.00303 ohm



STB75NF75
STP75NF75 - STP75NF75FP
N-channel 75V - 0.0095Ω - 80A - TO-220 - TO-220FP - D^{PAK} STripFET™ II Power MOSFET

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
		D ^{PAK} /TO-220FP	
V_{DS}	Drain-source voltage ($V_{GS} = 0$)	75	V
V_{DSR}	Drain-source voltage ($R_{DS(on)} = 20\text{m}\Omega$)	75	V
V_{GS}	Gate-source voltage	± 20	V
$I_{D(on)}$	Drain current (continuous) at $T_C = 25^\circ\text{C}$	80	A
$I_{D(on)}$	Drain current (continuous) at $T_C = 100^\circ\text{C}$	70	A
$I_{D(p)}$	Drain current (pulsed)	320	A
P_{TOT}	Total dissipation at $T_C = 25^\circ\text{C}$	300	W
	Durating factor	2.0	0.3
dV/dt (1)	Peak diode recovery voltage slope	12	V/ns
E_{AS} (1)	Single pulse avalanche energy	700	mJ
V_{ISO}	Insulation withstand voltage (RMS) from all three leads to external heat sink ($I_{D(on)} = 25^\circ\text{C}$)	2000	V
T_J	Operating junction temperature	-55 to 175	$^\circ\text{C}$
T_{stg}	Storage temperature		

Sheet: /Mosfets/
File: Mosfets.kicad_sch


Title: Ana ESC Mosfets


Size: A4 Date: 2025-12-11

KiCad E.D.A. 9.0.6

Rev: v0.1

Id: 2/5

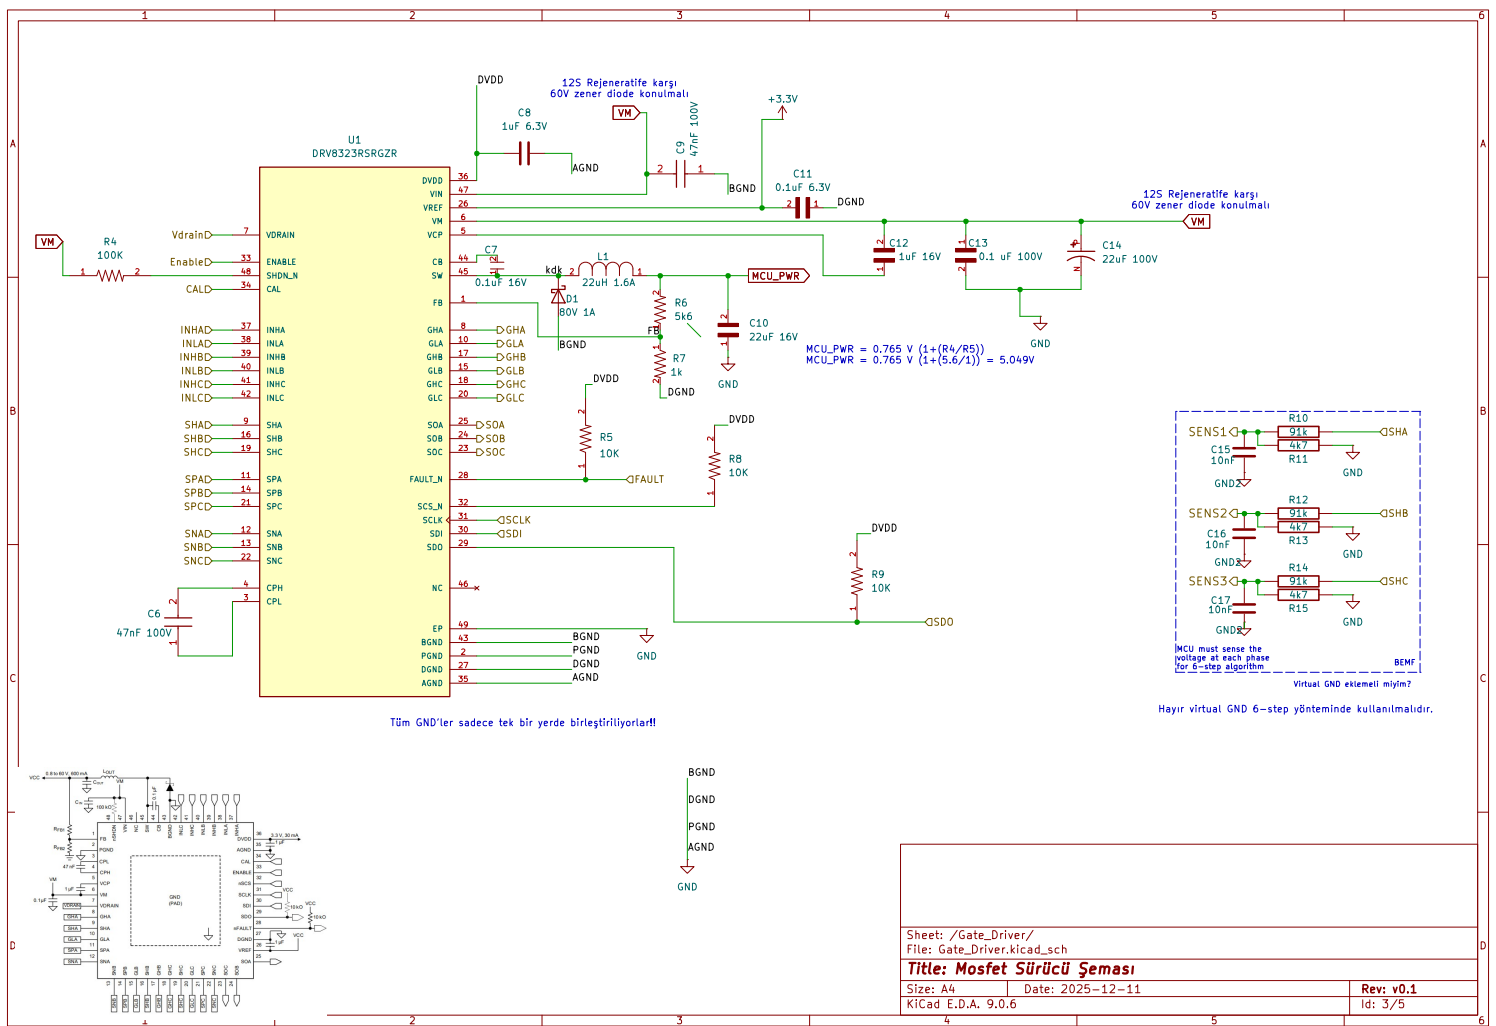

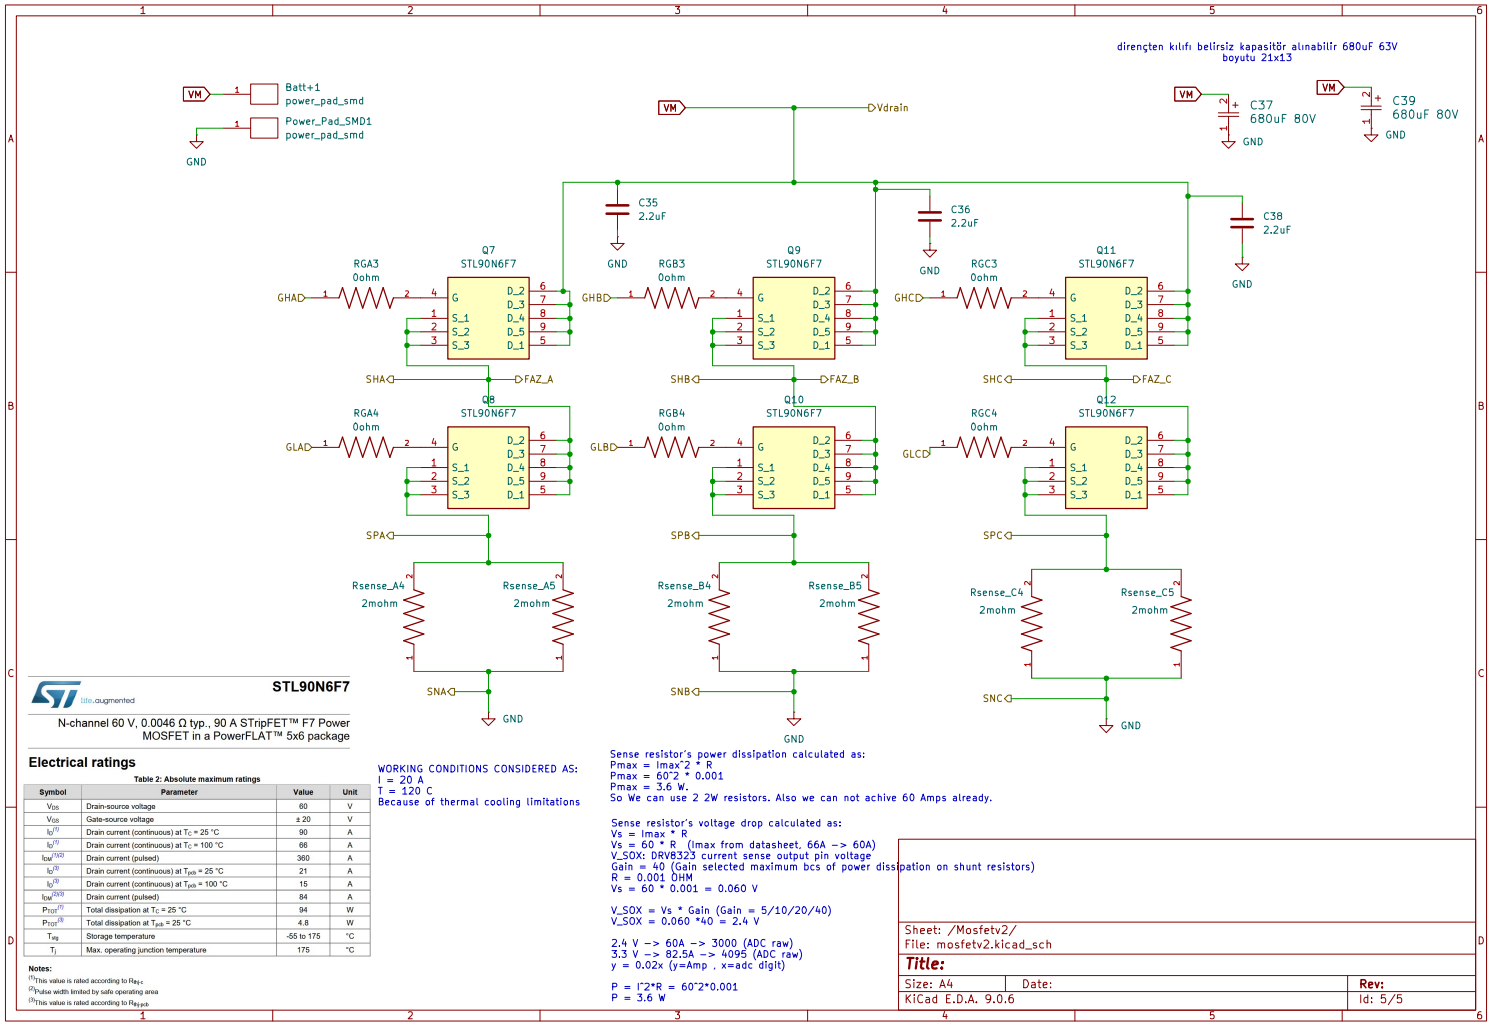

Termal Hesaplamlar

Figure 10: Normalized on-resistance vs temperature




Table 3: Thermal data

Parameter	Value	Unit
Thermal resistance junction-pcb max.	31.3	$^\circ\text{C/W}$
Thermal resistance junction-case max.	1.6	$^\circ\text{C/W}$