


BETLA Bench

LBE7-60

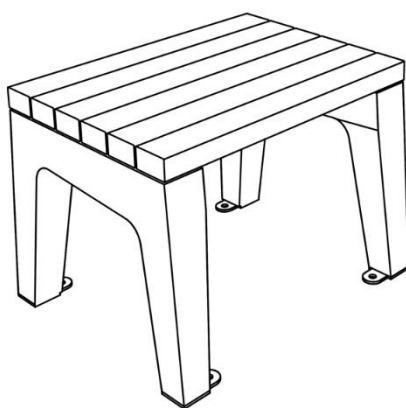

The picture is only illustrative, it may not exactly match the product described

Product description	Bench is made of concrete grade C 30/37. To the side rails is attached seat made from solid wooden lamellas attached to the galvanized supporting structure with stainless screws M8. The seat is made of five wooden lamellas of rectangular shape of dimensions 70x40 mm (TW 68x42 mm).
Material	Construction: concrete grade C 30/37 Solid wood: spruce, oak, wood pine ThermoWood®, tropical wood
Surface treatment	Concrete shade. Spruce – two-layer impregnation and lacquer mixed with water with beeswax Tropical wood – treated with teak oil Oak – treated with impregnation and a glaze with biocidal effect Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection
Dimensions	600×490×443 mm
Anchoring	Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance. A detailed drawing is available for download on the website for each particular product.

[DOWNLOAD PDF SAMPLER >](#)
