


BORDO Bench

LBO3

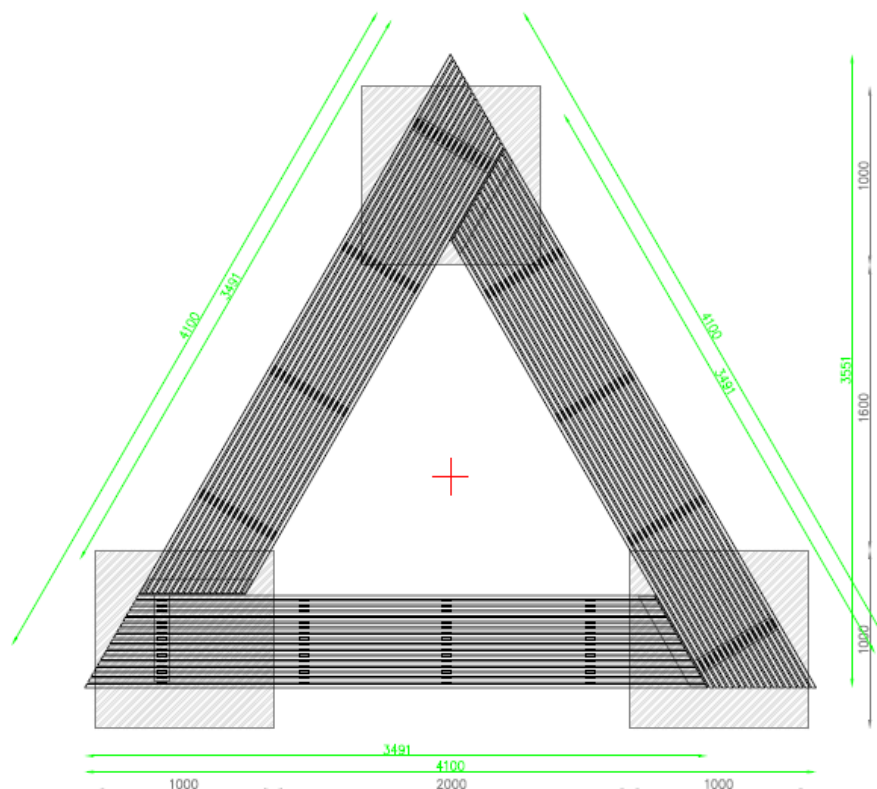

The picture is only illustrative, it may not exactly match the product described.

Product description

A massive bench consisting of wooden boards and supporting steel construction connecting three benches into triangle set. Seat is made of solid wooden boards. The construction consists of steel weldment from sheet metal of thickness 6 and 10 mm carrying hidden threaded rods. The threaded rods pull the wooden boards interleaved with sheet metal burn parts of thickness 10 mm and rubber cuts together. The seat is made up in total of 17 rectangular (21 x 145 mm) boards of variable length 2919-3491 mm from tropical wood and 15 rectangular (26 x 140 mm) boards of variable length 2919-3491 mm from wood pine ThermoWood®.

Material

Construction: steel grade 11
Solid wood: wood pine ThermoWood®, tropical wood

[DOWNLOAD PDF SAMPLER >](#)

Surface treatment

Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).
Other RAL shades according to RAL sampler on request only.
Tropical wood – treated with teak oil
Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection

Dimensions

3491×517×425 mm / 150-190 kg
When 3 benches are used in a triangular assembly, an equilateral triangle with a side length of 4100 mm is formed.

Anchoring

Anchoring is done with four stainless steel threaded rods M10 of length min. 100 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.
A detailed drawing is available for download on the website for each particular product.

