


BORDO Bench

LBO6

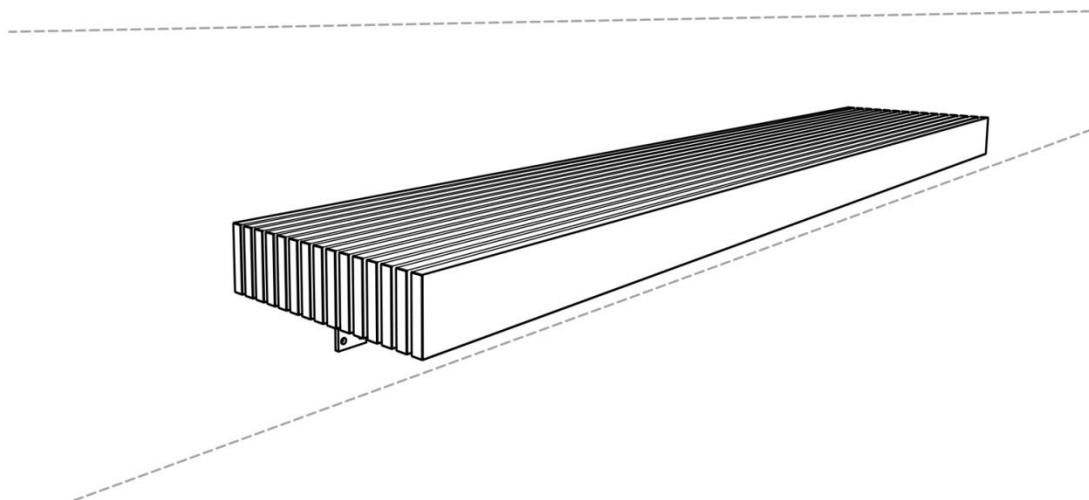

The picture is only illustrative, it may not exactly match the product described.

Product description	A massive bench consisting of wooden boards and supporting steel construction for anchoring to the concrete wall. Seat is made of solid wooden boards. The construction consists of steel weldment from sheet metal of thickness 6 and 10 mm carrying hidden threaded rods. The threaded rods pull the wooden boards interleaved with sheet metal burn parts of thickness 10 mm and rubber cuts together. The seat is made up in total of 17 rectangular (21 x 145 mm) boards of the length 2900 mm from tropical wood or 15 rectangular (26 x 140 mm) boards of the length 2900 mm from wood pine ThermoWood®.	
Material	Construction: steel grade 11 Solid wood: wood pine ThermoWood®, tropical wood	DOWNLOAD PDF SAMPLER >
Surface treatment	Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty). Other RAL shades according to RAL sampler on request only. Tropical wood – treated with teak oil Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection	
Dimensions	2900×530×420 mm / 90-155 kg	
Anchoring	Anchoring is done with 8 stainless steel threaded rods M10 of length min. 100 mm and 8 nut cover caps M10 with a chemical anchor into concrete wall. A detailed drawing is available for download on the website for each particular product.	

