


EKTA Bench

LEK3-60

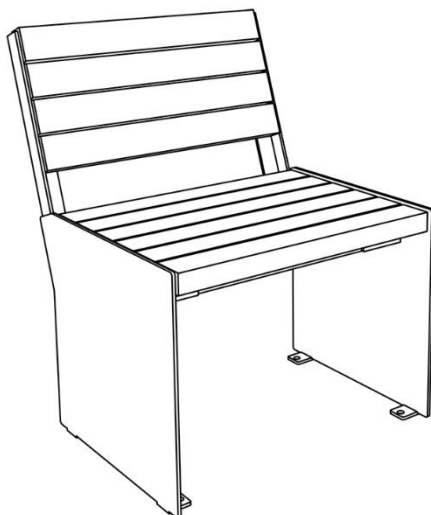

The picture is only illustrative, it may not exactly match the product described.

Product description

Steel weldment. The construction consists of two side rails welded from a bent strip of thickness 6 mm and bent L profiles 40 x 40 mm joined by longitudinal reinforcing structure. A seat and backrest are made of solid wood attached to the supporting structure with stainless screws. The seat is made up of 6 rectangular (70 x 40 mm) laths of length 572 mm. The backrest consists of 4 rectangular wooden laths (70 x 40 mm) of length 572 mm.

Material

Construction: steel grade 11 treated with powder coating
Solid wood: spruce, oak, wood pine ThermoWood®, tropical wood

[DOWNLOAD PDF SAMPLER >](#)

Surface treatment

Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).
Other RAL shades according to RAL sampler on request only.
Spruce – two-layer impregnation and lacquer mixed with water with beeswax
Tropical wood – treated with teak oil
Oak – treated with impregnation and a glaze with biocidal effect
Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection

Dimensions

600×624×793 mm

Anchoring

Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.
A detailed drawing is available for download on the website for each particular product.

