


## Bench GRADUA

LGR049

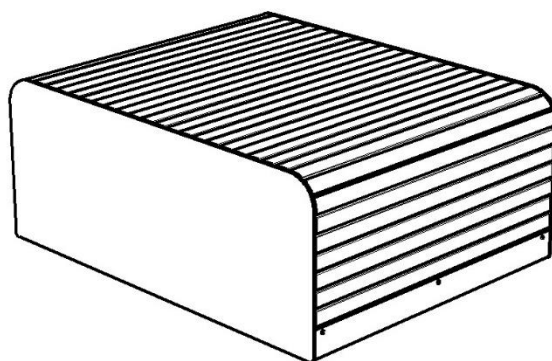

## Product description

Steel weldment. The construction consists of two side walls made of 4 mm thick sheet metal and a connecting L profile. The supporting structure is carried by wooden slats fixed to the structure with stainless steel screws..

## Material

Construction: steel class 11  
Solid wood: oak, tropical wood, acacia, ThermoWood®

[DOWNLOAD PDF SAMPLER >](#)

## Surface treatment

Protective layer of zinc coated with powder firing paint in a fine matt texture, in shades:  
RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).  
Other RAL shades according to RAL sampler on request only.  
Tropical wood – treated with teak oil  
Oak – treated with impregnation and a glaze with biocidal effect  
Acacia – treated with teak oil  
ThermoWood® thermally treated Finnish pine - wood primer with UV protection

## Dimensions

900x1098x456 mm

## Anchoring

Chemical anchorage using 4 stainless steel threaded rods M10 of min. length 200 mm and 4 nuts M10 with washers into the pre-concreted foundations.  
A detailed drawing is available for download on the website for each particular product.

