


## INOA Bench

LIN20-60

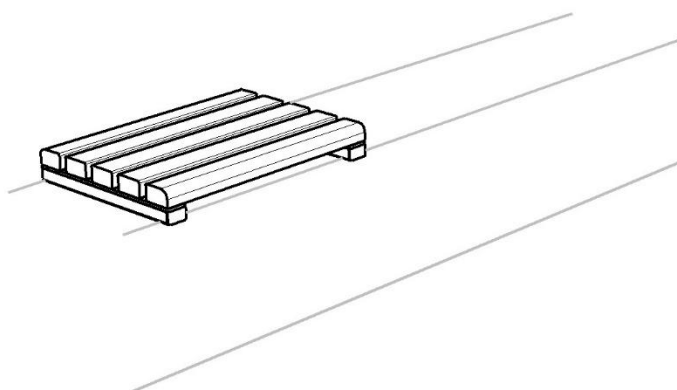

The picture is only illustrative, it may not exactly match the product described.

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                           |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Product description | Steel weldment. The construction consists of two side walls welded from bent sheet metal sections 8 mm thick, the slats are reinforced in the middle of the bench with bent sheet metal section 4 mm thick. The supporting structure is supported by 5 slats of rectangular cross-section (70 × 40 mm for tropical wood or 68 × 42 mm for Finnish ThermoWood pine), 600 mm long, fixed with stainless steel screws.                                                                                                                                         |                                           |
| Material            | Construction: steel grade 11<br>Solid wood: tropical wood, pine ThermoWood®, acacia, oak                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <a href="#">DOWNLOAD PDF SAMPLER &gt;</a> |
| Surface treatment   | Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty). Other RAL shades according to RAL sampler on the web.<br>Tropical wood – treated with teak oil<br>Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection<br>Oak – treated with impregnation and a glaze with biocidal effect<br>Acacia - treated with teak oil |                                           |
| Dimensions          | 600×436×78 mm / 13 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                           |
| Anchoring           | Anchoring is done with four stainless steel threaded rods M10 of length min. 80 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.<br>A detailed drawing is available for download on the website for each particular product.                                                                                                                                                                                                                                                                            |                                           |

