


INOA Bench

LIN6-60

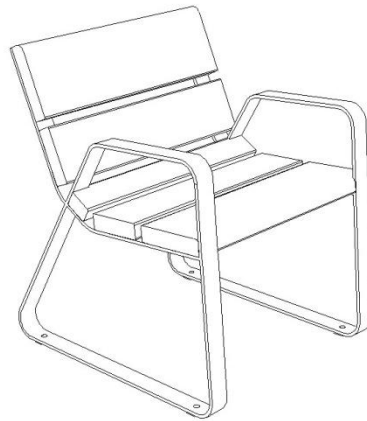

The picture is only illustrative, it may not exactly match the product described.

Product description

Steel weldment. The construction consists of two side walls welded from bent sheet metal pieces of 8 mm thickness, the seat is reinforced in the middle with a strip. The supporting structure is supported by 2 plates of rectangular cross-section 185 × 40 mm rounded with R20 radius, 2 plates of rectangular cross-section 140 × 40 mm and 1 plate of rectangular cross-section 68 × 40 mm, length 600 mm, fixed with stainless steel screws.

Material

Construction: steel grade 11
Solid wood: wood pine ThermoWood®, oak

[DOWNLOAD PDF SAMPLER >](#)

Surface treatment

Hot-dip zinc treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).
Other RAL shades according to RAL sampler on the web.
Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection
Oak – treated with impregnation and a glaze with biocidal effect

Dimensions

600×681×779 mm / 33 kg

Anchoring

Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.
A detailed drawing is available for download on the website for each particular product.

