


RADIANO Bench

LRA15

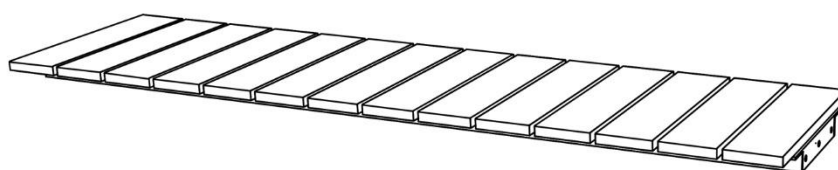

The picture is only illustrative, it may not exactly match the product described.

Product description	Steel weldment. The construction is made of sheet metal shavings thick 5 mm which are connected to each other by three M8 screws. To the supporting structure are attached 14 pieces of wooden laths of length 440 mm fixed to the structure by stainless steel screws.	
Material	Construction: steel grade 11 Solid wood: spruce, oak, wood pine ThermoWood®, tropical wood	DOWNLOAD PDF SAMPLER >
Surface treatment	Hot-dip zinc treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty). Other RAL shades according to RAL sampler on request only. Spruce – two-layer impregnation and lacquer mixed with water with beeswax Tropical wood – treated with teak oil Oak – treated with impregnation and a glaze with biocidal effect Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection	
Dimensions	1792×440×66 mm	
Anchoring	Anchoring is done with four stainless steel threaded rods M10 of length min. 100 mm and four nut cover caps M10 into concrete wall prepared in advance of 400 mm height. A detailed drawing is available for download on the website for each particular product	

