


## TWISTULA Object

LTW411

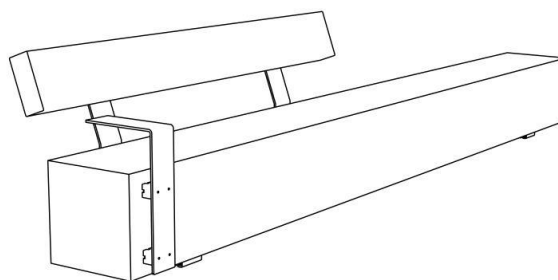

The picture is only illustrative, it may not exactly match the product described.

## Product description

The design element consists of a seat made from a substantial solid timber beam with a cross-section of 400 × 400 mm, to which a steel base is attached from the underside using screws. A backrest with a length of 2000 mm and an all-metal armrest are fastened to the seat by means of 10 mm thick sheet-metal plate cutouts. **The wood is constantly being worked on and significant cracks underline the natural appearance of the material and therefore the surface can be of a rougher nature. As a result of climatic conditions, the natural aging of wood occurs, which is manifested by graying or blackening.**

## Material

Construction: steel grade 11  
Solid wood: douglas fir, oak

[DOWNLOAD PDF SAMPLER >](#)

## Surface treatment

Metal - hot-dip zinc optionally treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).  
Other RAL shades according to RAL sampler on the web.  
Douglas fir – without surface treatment  
Oak – without surface treatment

## Dimensions

4000×618×769 mm (± 4 %) / 516 kg

## Anchoring

Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.  
A detailed drawing is available for download on the website for each particular product.

