


VELA Bench

LVL9

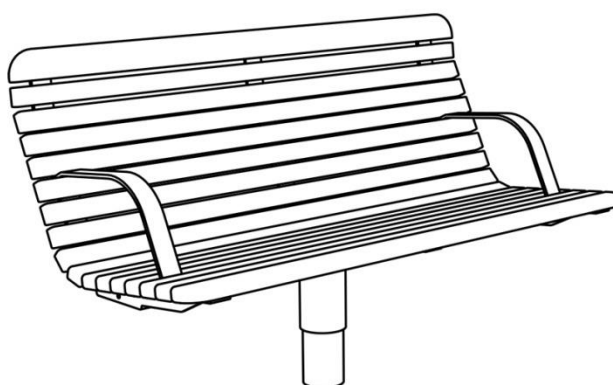

The picture is only illustrative, it may not exactly match the product described.

Product description

Steel weldment. The construction consists of two side rails welded from a bent strip 50x8 mm and sheet blasts of thickness 5 mm. To the construction are attached wooden laths 1400 mm long wooden fixed to it by stainless steel screws of the following dimensions: 2 laths of rectangular shape (70x32 mm) and 15 laths of rectangular shape (40x32 mm). The construction is rotatable by 360°, when the bench is occupied the fixation of the position occurs, which does not change until the bench is free again.

Material

Construction: steel grade 11
Solid wood: oak, tropical wood, acacia

[DOWNLOAD PDF SAMPLER >](#)

Surface treatment

Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).
Other RAL shades according to RAL sampler on request only.
Tropical wood – treated with teak oil
Oak – treated with impregnation and a glaze with biocidal effect
Acacia - treated with teak oil

Dimensions

1400x676x864 mm

Anchoring

Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.
A detailed drawing is available for download on the website for each particular product.

