





# MAG Litter bin

KMA221

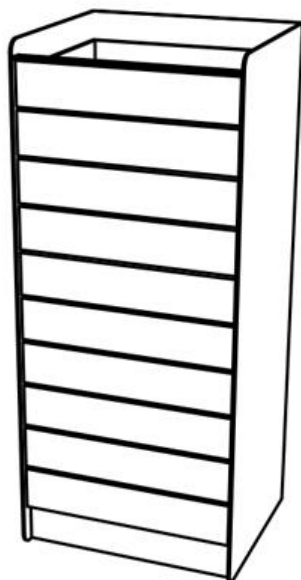

The picture is only illustrative, it may not exactly match the product described.

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product description | Litter bin on a plinth. The body of the litter bin is made up of galvanized steel structure treated with powder coating. The sheathing in front consists of 10 solid wooden lamellas. Inside of the litter bin there is a removable polypropylene container 5 mm thick with a volume of 65 litres.                                                                                                                                                                                                                                                                                                             |
| Material            | Construction: steel grade 11<br>Solid wood: spruce, oak, wood pine ThermoWood®, tropical wood                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Surface treatment   | Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).<br>Other RAL shades according to RAL sampler on request only.<br>Spruce – two-layer impregnation and lacquer mixed with water with beeswax<br>Tropical wood – treated with teak oil<br>Oak – treated with impregnation and a glaze with biocidal effect<br>Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection |
| Dimensions          | 320×362×846 mm / 65 l                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Anchoring           | Anchoring is done with four stainless steel threaded rods M10 of length min. 100 mm with a chemical anchor into concrete foundations 100 mm deep prepared in advance.<br>A detailed drawing is available for download on the website for each particular product.                                                                                                                                                                                                                                                                                                                                              |



362

320