


# INOA Bench

## LIN50-60

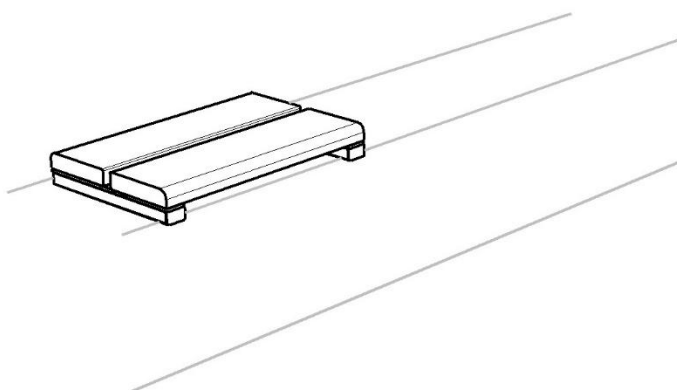

The picture is only illustrative, it may not exactly match the product described.

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product description | Steel weldment. The construction consists of two side walls welded from bent sheet metal pieces of 8 mm thickness, the seat is reinforced in the middle with a strip. The supporting structure is supported by 2 plates of rectangular cross-section 185 × 40 mm rounded with R20 radius and 600 mm long, fixed with stainless steel screws.                                                                                                                                        |
| Material            | Construction: steel grade 11<br>Solid wood: pine ThermoWood®, oak                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Surface treatment   | Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).<br>Other RAL shades according to RAL sampler on the web.<br>Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection<br>Oak – treated with impregnation and a glaze with biocidal effect |
| Dimensions          | 600×395×78 mm / 13 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Anchoring           | Anchoring is done with four stainless steel threaded rods M10 of length min. 80 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.<br>A detailed drawing is available for download on the website for each particular product.                                                                                                                                                                                                    |

