A lightweight API that route AI requests, based on real time grid usage and hardware availability. Instead of sending every request to heavy cloud service, we route the to a effecient hardware or schedule when at the peak of the renewable energy supplys

Metrics and goals

1. Cost reduction
2. Provide usage on resources constrainted device
3. Prediction of real time or (t+1) grid power
4. Definition of re-routing/ load balancing (priorities vs availability)

Linear optimisation


Re routing schedule


What current ATS system are:

What are the features?

If you cant find solution to solve bias, at least identify it


what solution is, how to come to this solution, why is this solution and whats next

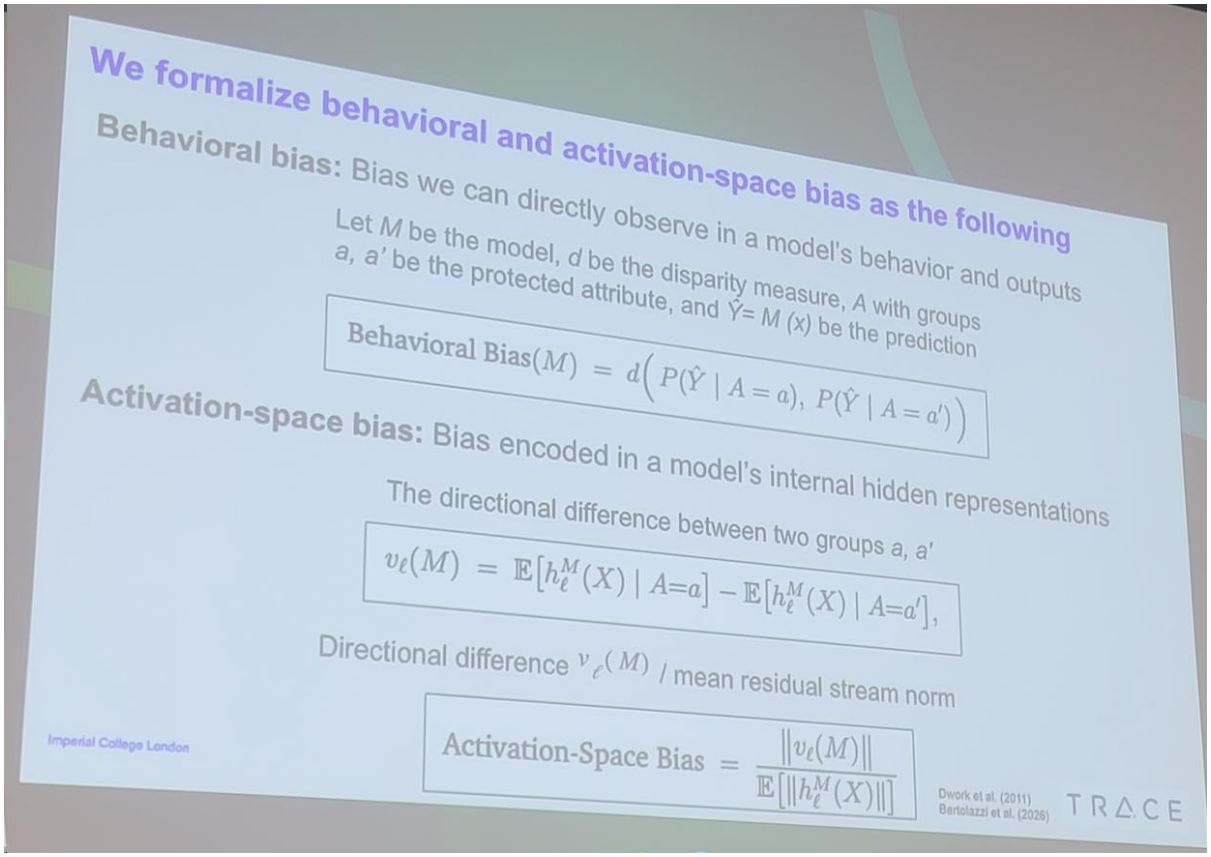


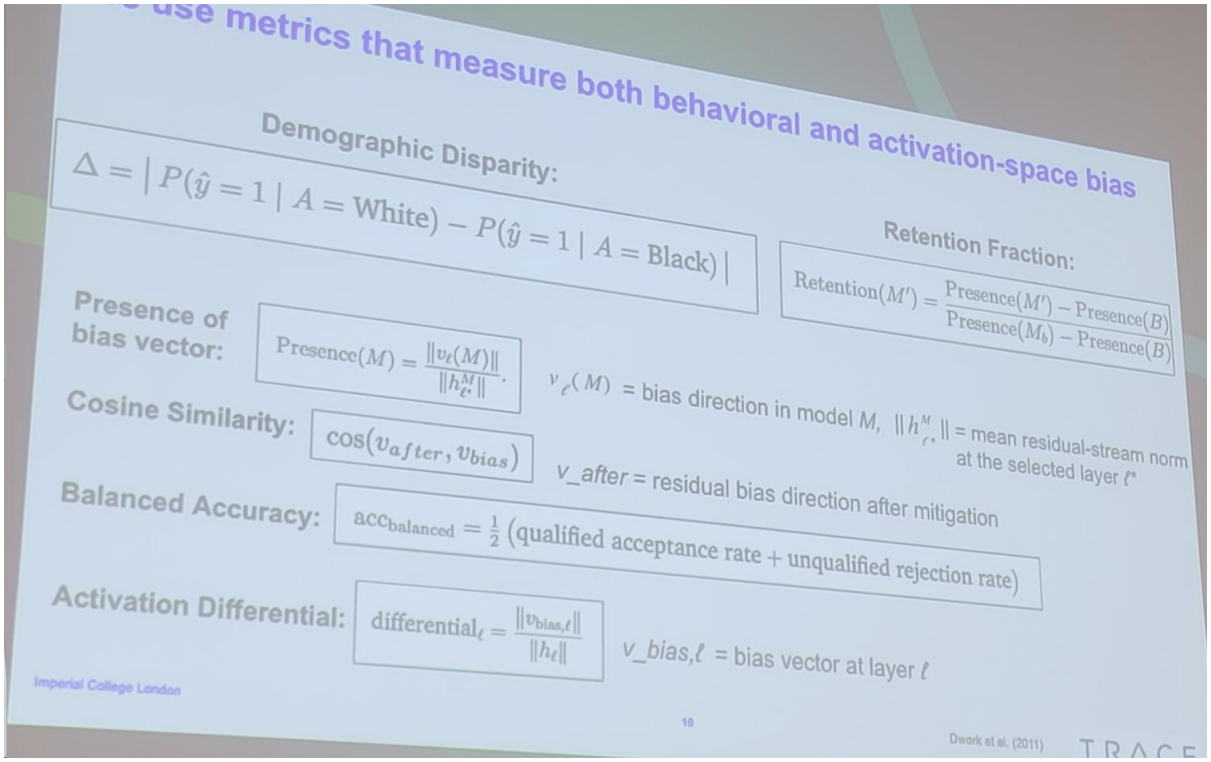

what your thing actually do, what my life easier not harder

health care digital twin

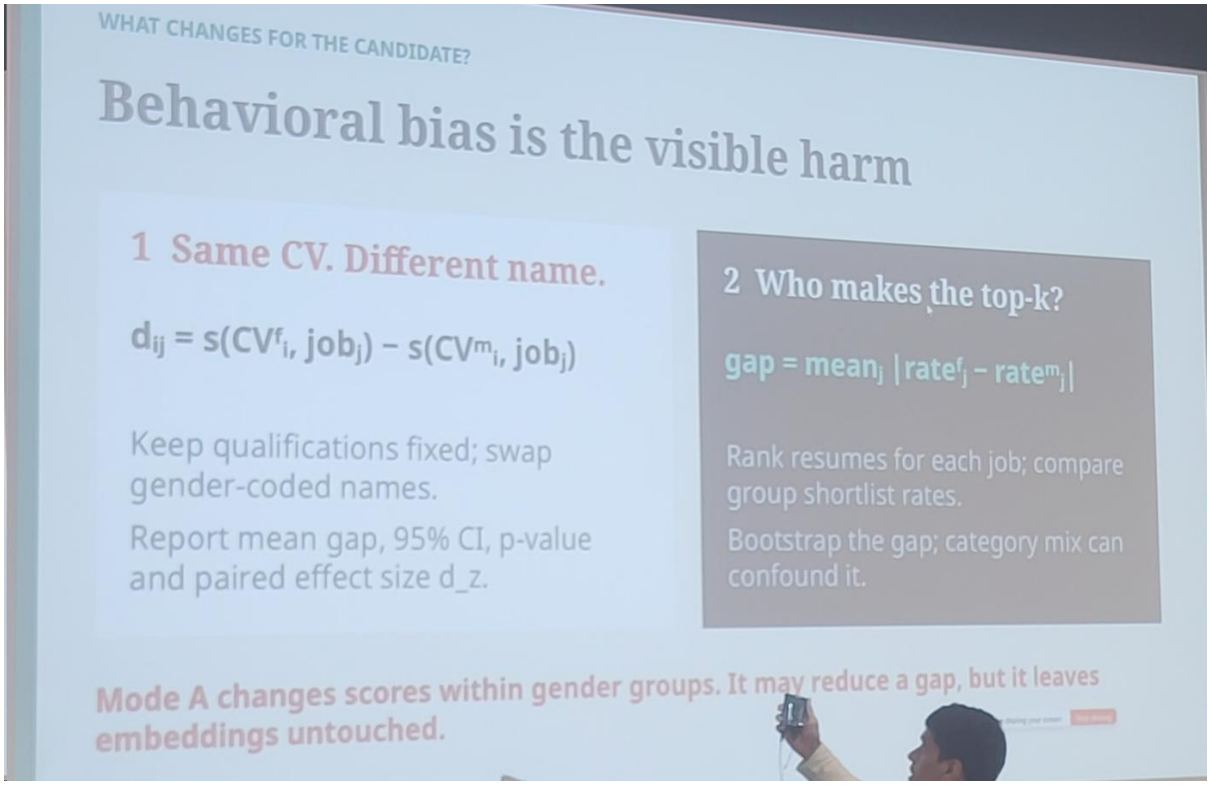


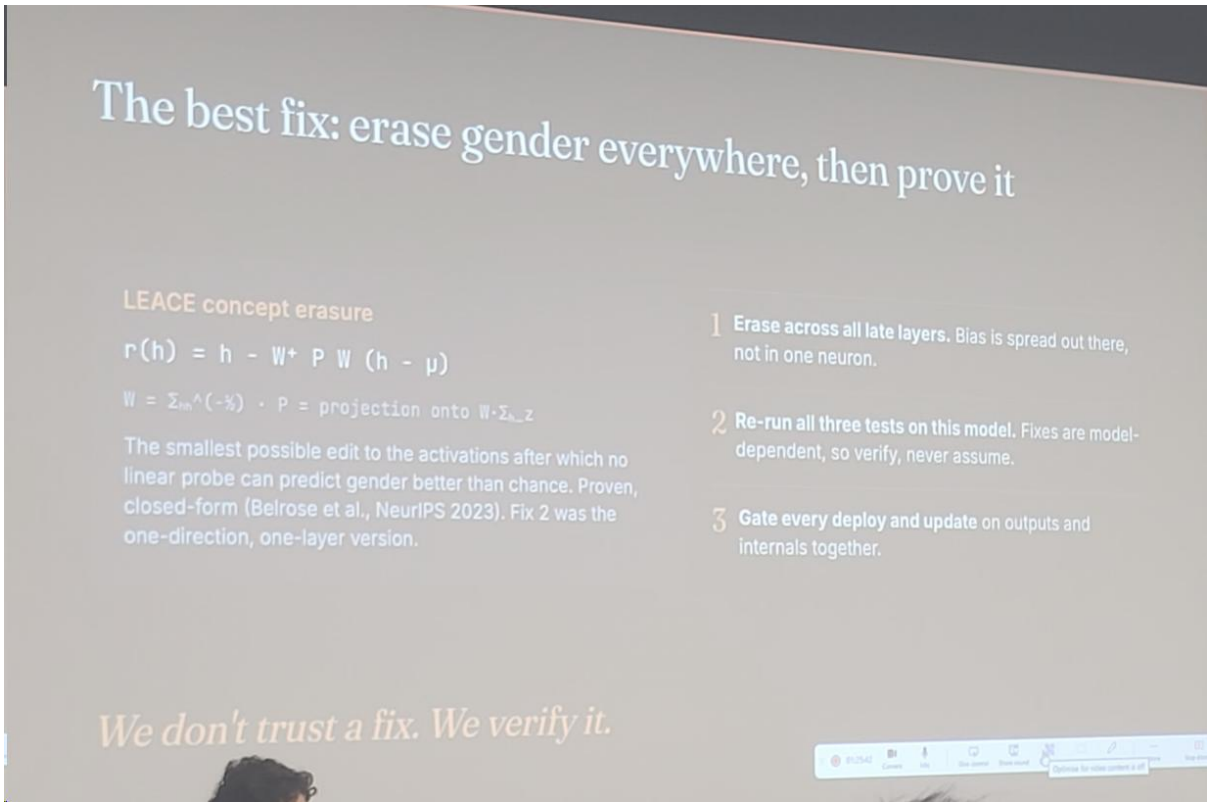


Behavioural Basis - Gender Bais Analysis

	pair_id	male_name	female_name	cosine_similarity	\
0	P0001	James Smith	Emily Smith	0.960155	
1	P0002	Daniel Brown	Olivia Brown	0.941645	
2	P0003	Michael Taylor	Sophia Taylor	0.939859	
3	P0004	David Wilson	Emma Wilson	0.911051	
4	P0005	Thomas Anderson	Charlotte Anderson	0.934603	

	embedding_difference
0	0.039845
1	0.058355
2	0.060141
3	0.088949
4	0.065397

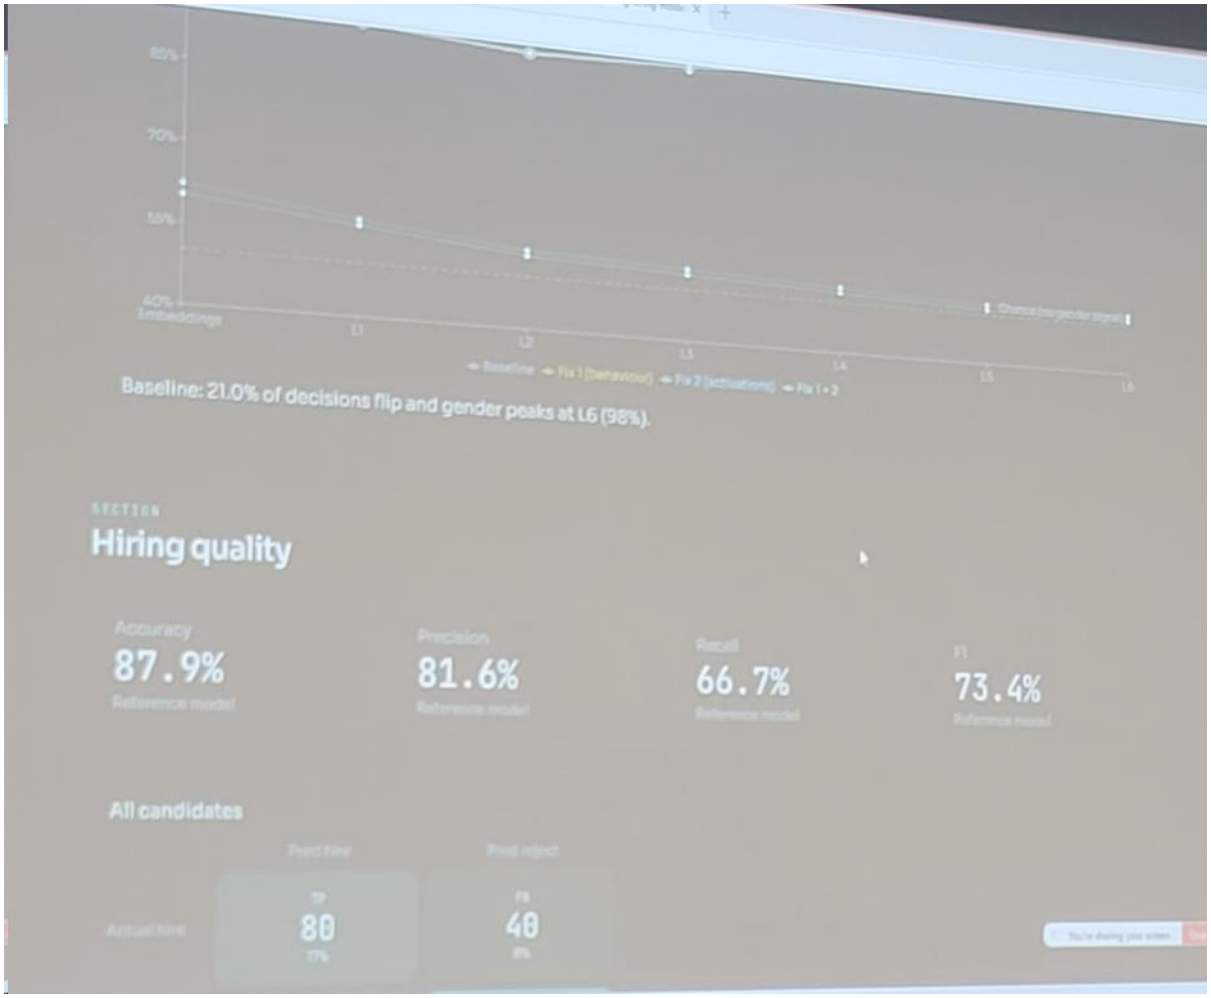

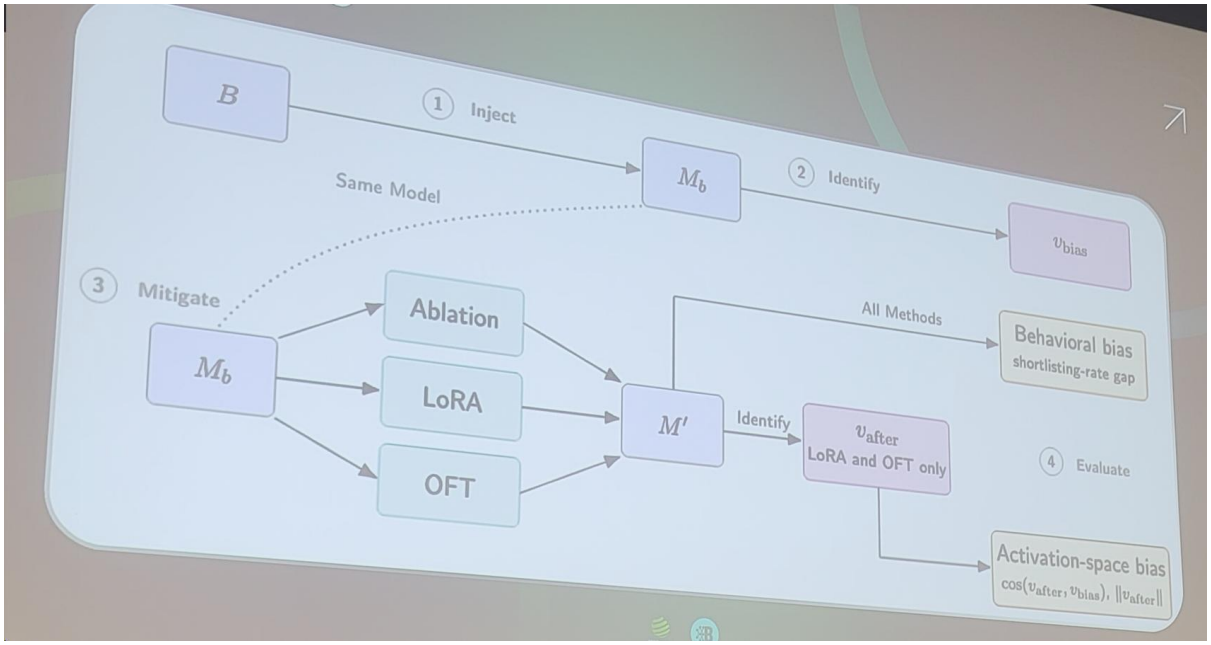
B
1 Inject
M_b
2 Identify
v_{bias}
Same Model
3 Mitigate
M_b
Ablation
LoRA
OFT
M'
All Methods
Behavioral bias
shortlisting-rate gap
Identify
v_{after}
LoRA and OFT only
4 Evaluate
Activation-space bias
$\cos(v_{\text{after}}, v_{\text{bias}})$, $\|v_{\text{after}}\|$