

GVIC Patent Flow Architecture

Global Value Integration & Convergence System

1. System Overview

GVIC is an integrated system based on 12 patents that systematically defines, analyzes, and assetizes the types, sentiments, and relationships of existing signals for decision-making support.

Gyeoliron (5:3:2 Ratio)


Domain	Ratio	Meaning
Public	50%	Social Value
Production	30%	Business Value
Individual	20%	Personal Value

Mathematical Expression: $\text{Sigma} = [0.5, 0.3, 0.2]^T$

2. Patent List (12 Patents)

Patent	Node	Core Function
H	CORE	Global Convergence Control (Gyeoliron 5:3:2)
A	GATE	Data Recognition, Conformity Verification
E	SHIELD	Toxic Data Quarantine
G	REFINE	Value Refinement, Noise Removal
B	CALC	Value Calculation, 5:3:2 Distribution
C	EXEC	Resource Execution, Allocation
F	FIELD	Physical Layer Execution, Entropy Control
D	LEDGER	Trajectory Storage, History Preservation
I	INTEGRITY	Integrity Proof, Hash Chain
J	PLATFORM	External API Integration
LL	INTELLIGENCE	Contribution Quantification

3. System Flow Architecture

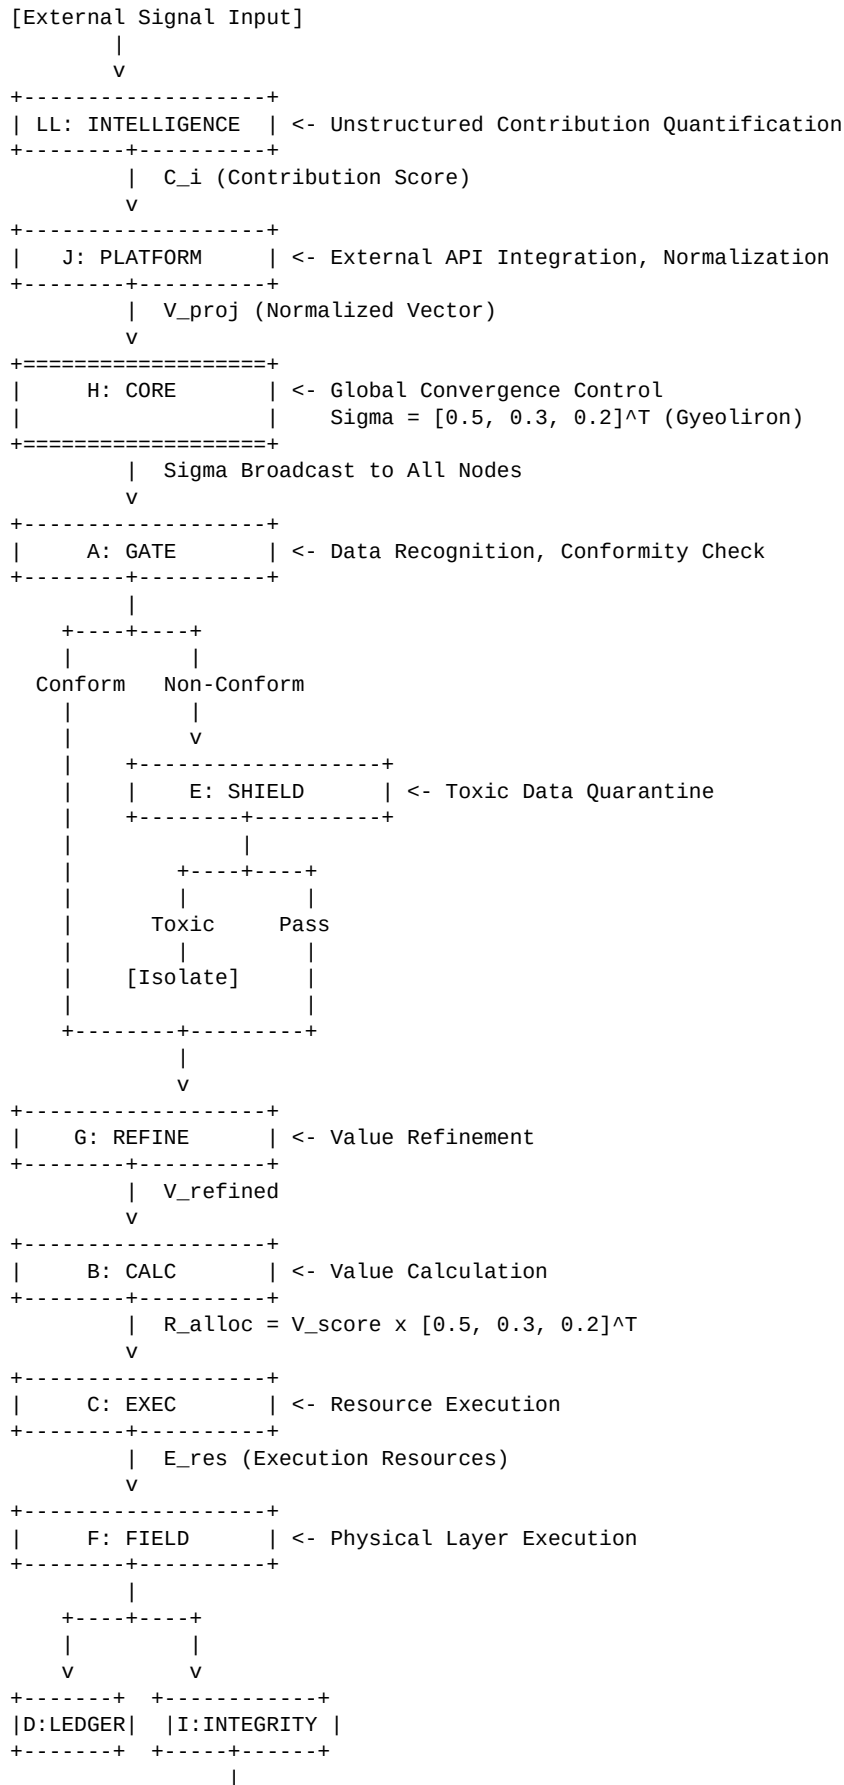

| V_proof (Integrity Proof)
v
[Feedback to H: CORE]

4. Input/Output Relationships

Patent	Node	Input (From)	Output (To)
LL	INTELLIGENCE	External Unstructured Data	C_i -> J
J	PLATFORM	External API, LL Output	V_proj -> H
H	CORE	J Output, All Node Status	Sigma -> All Nodes
A	GATE	External Signal, Sigma	Conform/Non-Conform -> E or G
E	SHIELD	Non-Conform Data, Sigma	Isolate or Pass -> G
G	REFINE	Passed Data, Sigma	V_refined -> B
B	CALC	G Output, Sigma	R_alloc -> C
C	EXEC	B Output, Sigma	E_res -> F
F	FIELD	C Output, Physical State	Execution Result -> D, I
D	LEDGER	F Output, All History	H(T) -> I
I	INTEGRITY	D Output, Sigma, All Data	V_proof -> H (Feedback)

5. Core Mathematical Models

Patent	Formula	Description
H	$\text{Sigma} = [0.5, 0.3, 0.2]^T$	Gyeoliron Convergence Index
A	$S_{idx} = (V_i \cdot \text{Sigma}) / (V_i \times \text{Sigma})$	Conformity Index
E	$\Delta S = -\sum P(x_i \text{Sigma}) \log P(x_i \text{Sigma})$	Entropy Change (Toxic Detection)
G	$D_{idx} = \int V_{cand} \cdot \text{Sigma} dt - \sigma_{noise}$	Value Discrimination Index
B	$R_{alloc} = V_{score} \times [0.5, 0.3, 0.2]^T$	Allocation Vector
C	$E_{res} = \beta \times (M_{conv} \times R_{alloc})$	Execution Resource
F	$E_i(t) = \int (R_{alloc} \cdot F_i - \kappa \times dS_i/dt) dt$	Physical Execution
D	$H(T) = \sum [S(t) \cdot G + L(V_{proof}(t))]$	Trajectory Stacking
I	$V_{proof}(t) = \text{Hash}(\text{Sigma}(t) \text{ XOR } E(t) + V_{proof}(t-1))$	Integrity Proof
LL	$C_i = H(D_{un}) \times \cos(\theta_{ref})$	Contribution Quantification

6. System Survival Threshold (Omega)

Condition	Formula	Meaning
1	$0.2 \leq V_{pub} \leq 0.8$	Public Infrastructure Maintenance
2	$V_{ind} \leq 0.5$	Individual Occupation Limit
3	$\sum V_i = 1.0$	Value Conservation Normalization

7. Feedback Loops

Path	Data	Purpose
I -> H	V_proof (Integrity Proof)	System Integrity Monitoring
F -> H	Entropy Information	Physical State Feedback
E -> H	Toxic Detection Info	Security Status Feedback
D -> H	Historical Trajectory	Convergence Analysis

8. Document Information

Version: 1.0.0

Date: 2026-02-15

System: GVIC (Global Value Integration & Convergence)