

# Fundamentals of Computer Design

## Computer Architecture

J. Daniel García Sánchez (coordinator)  
David Expósito Singh  
Javier García Blas

ARCOS Group  
Computer Science and Engineering Department  
University Carlos III of Madrid

- 1 Introduction
- 2 Historic perspective
- 3 Classification
- 4 Parallelism
- 5 Computer Architecture
- 6 Conclusion

# Computer Architecture



Source: [http://commons.wikimedia.org/wiki/File:Amdahl\\_march\\_13\\_2008.jpg](http://commons.wikimedia.org/wiki/File:Amdahl_march_13_2008.jpg)

*The term **architecture** is used here to describe the attributes of a system as seen by the programmer, i.e., the conceptual structure and functional behavior, as distinct from the organization of the data flow and controls, the logical design, and the physical implementation.*

Gene Amdahl et al.  
*Architecture of the IBM System.*  
IBM Journal of Research and Development  
Vol 8 (2) pp. 87-101. 1964.

# What is Computer Architecture?

- **Computer Architecture** is the science and art of *selecting and interconnecting* hardware components to create computers that meet **functional, performance and cost** goals.


*WWW Computer Architecture Page.*

- **Computer architecture** is not about using computers to design buildings. 😊



# Why study Computer Architecture?

- No computers  $\Rightarrow$  No Computer Engineers.
- To understand trends for next decade.
  - How will computers be in the future?
  - What will they be able to do?
- To understand computers limitations.
  - What can be done? What can't be done?
  - Where are the performance limitations?
- To pass this course


# The Moore's Law



- Number of transistors per chip doubles every N months.
  - With  $12 < N < 24$ .
  - Gordon Moore, 1965.



# Transistors per chip

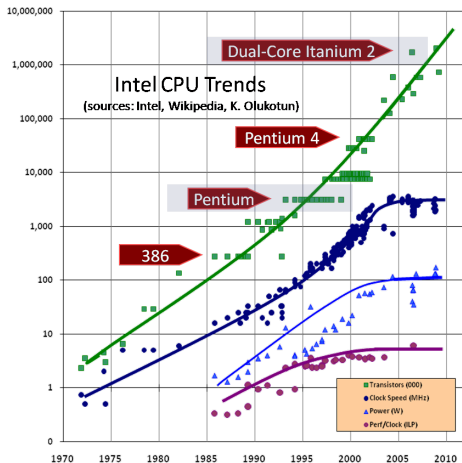

# Actividad

- Please, read the full article:

Source: **The free lunch is over.**

Herb Sutter.

[http://www.gotw.ca/publications/  
concurrency-ddj.htm](http://www.gotw.ca/publications/concurrency-ddj.htm)



[illegible]

- 1986:  
RISC.
- 2005:  
multi-core.

Source: Computer Architecture: A Quantitative Approach. 6 Ed  
Hennessy and Patterson. Morgan Kaufmann. 2017.

# Effects of RISC emergence

- Available capacity improvement.
  - A high-end microprocessor is more powerful than a supercomputer ten years before.

# Cost versus performance

- The cost/performance improving ratio leads to new classes of computers.
  - 80's: PC and workstations.
  - 00's:
    - Smart-phones and tablets.
    - More large scale data centers with thousand of nodes giving a single system image.

# The RISC revolution

- Continuous semiconductor improvement led to microprocessor based computers to become dominant.
  - Minicomputers disappear.
  - Mainframes and supercomputers built as a collection of microprocessors.
- Sustained increase in performance from 1986 to 2003:
  - **52% per year.**
- **No longer true!**




- 1 Introduction
- 2 Historic perspective
- 3 Classification
- 4 Parallelism
- 5 Computer Architecture
- 6 Conclusion

# First revolution: Microprocessor

- The microprocessor revolution.
  - Generated from a single change.
  - Enough transistors (25,000) in a single chip for a 16-bit processor.
  - **Advantages:**
    - **Faster:** Less accesses out of the chip.
    - **Cheaper:** All in one chip.
- New market segments generated by the innovation.
  - Desktop computers, CD/DVD, laptops, video-game consoles, set-top-boxes, digital cameras, MP3, GPS, ...
- Impact on existing markets.
  - Supercomputers, mainframes, ...

# First microprocessor

- Intel 4004 (1971).
  - **Application domain:** Calculators.
  - **Technology:** 10,000 nm.
  - **Data:**
    - 2300 transistors.
    - 13 mm<sup>2</sup>
    - 108 KHz
    - 12 Volts
  - **Features:**
    - 4-bits data.
    - Data-path in one cycle.



Intel 4004 photo by Rostislav Lisovy



Unicom 141P Calculator 3 photo by Michael Holley.

# Second revolution

- Extract implicit instruction-level parallelism (ILP).
  - Hardware has resources that can be used in parallel.
  
- **Elements:**
  - **Pipelining**: Allowed increasing clock frequency.
  - **Caches**: Needed to increase clock frequencies.
  - **Floating point**: Integrated into the chip.
  - Increasing pipeline **depth** and **speculative branching**.
  - **Multiple issue**: superscalar architectures.
  - **Dynamic scheduling**: Out-of-Order execution.



# Top single core processors



Die of Intel  
Pentium 4  
(Northwood)  
Source: <http://gecko54000.free.fr>




- Intel Pentium 4 (2003).
  - **Application domain:** Desktop / Servers.
  - **Technology:** 90 nm (1/100x).
- **Data:**
  - 55M transistors (20,000x).
  - 101 mm<sup>2</sup> (10x).
  - 3.4 GHz (10,000x).
  - 1.2 Volts (1/10x).
- **Features:**
  - 32/64-bit data (16x).
  - Data path with 22 pipeline stages (later 31).
  - 3-4 instructions per cycle (superscalar).
  - Two level cache on chip.
  - Data parallel instructions (SIMD).
  - Hyper-threading.

# Third revolution

- Explicitly support thread-level and data-level parallelism.
  - Hardware offers parallel resources and software specifies its use.
  - Parallelism no longer hidden by hardware.
  - **Rationale**: Diminishing returns from ILP.
  
- **Elements**:
  - **Vector instructions**: Intel SSE.
  - General support for **multi-threaded** applications.

# Multi-core processors

- Intel Core i7 (2009).
  - **Application:** Desktop / Server.
  - **Technology:** 45 nm (1/2x).
- **Data:**
  - 774M transistors (12x).
  - 296 mm<sup>2</sup> (3x).
  - 3.2 GHz – 3.6 GHz ( $\approx 1x$ ).
  - 0.7 – 1.4 Volts ( $\approx 1x$ ).
- **Features:**
  - 128-bit data (2x).
  - Datapath with 14-stage pipeline (0.5x).
  - 4 instructions per cycle ( $\approx 1x$ ).
  - Three level cache on chip.
  - Data parallel instructions (SIMD).
  - Hyper-threading.
  - 4 cores (4x).



Die of Intel Core i7 (Nehalem)  
Source: [www.legitreviews.com](http://www.legitreviews.com)



# Architecture trends

- Instruction-Level Parallelism.
  - Parallel execution of instructions.
  - Impossible to improve Instruction-Level parallelism (since 2003-2005).
  - Hardware and compiler conspiracy to hide details to programmer.
    - Programmer with **very simplified** view of hardware.
- New models to improve performance.
  - **Data-Level** Parallelism (DLP).
  - **Thread-Level** Parallelism (TLP).
  - **Request-Level** Parallelism (RLP).
- **IMPORTANT**: All of them require to re-structure applications to take advantage of promised performance increase.

- 1 Introduction
- 2 Historic perspective
- 3 Classification
- 4 Parallelism
- 5 Computer Architecture
- 6 Conclusion

# Personal Mobile Devices

- Wireless devices with multimedia UI.
  - Mobile devices, tablets, ...
- **Price:** \$100 – \$1000.
- **Processor price:** \$10 – \$100.
- **Critical factors:**
  - Cost.
  - Energy.
  - Media performance.
  - Responsiveness.

# Desktop

- Designed to offer good performance to end-user.
  - From ultra-books to workstations.
  - Since 2008 more than 50% are laptops.
- **Price:** \$300 – \$2500.
- **Processor price:** \$50 – \$500.
- **Critical factors:**
  - Price-Performance.
  - Energy.
  - Graphics performance.

# Servers

- Used to run large scale applications and give service to multiple users simultaneously.
  - Growing since 80's replacing mainframes.
- **Price:** \$5,000 – \$10,000,000.
- **Processor price:** \$200 – \$2,000.
- **Critical factors:**
  - Throughput.
  - Availability.
  - Scalability.
  - Energy.



# Clusters / Warehouse Scale Computers (WSC)

- A collection of computers connected through a LAN and acting as a larger computer.
  - Made much more popular by **SaaS** (Software as a Service) growth.
  - Each node runs its own operating system.
  - WSC → 10,000+ nodes.
- **Price**: \$100,000 – \$200,000,000.
- **Processor price**: \$50 – \$250.
- **Critical factors**:
  - Price-Performance.
  - Throughput.
  - Energy proportionality.

# Embedded

- Computer within another system to run pre-established applications.
  - Dish-washer, video-game console, MP3, ...
- **Price:** \$10 – \$100,000.
- **Processor price:** \$0.01 – \$100.
- **Critical factors:**
  - Price.
  - Energy.
  - Application-specific performance.



- 1 Introduction
- 2 Historic perspective
- 3 Classification
- 4 Parallelism
- 5 Computer Architecture
- 6 Conclusion

# The speed of a serial computer

- A 1 TFLOP ( $10^{12}$  FLOPS) **sequential machine**:
  - Data must travel a certain **distance** ( $r$ ) from memory to CPU.
  - 1 **data element** per cycle  $\Rightarrow 10^{12}$  times per second  $\Rightarrow 10^{-12}$  s. per cycle.
  - Data traveling at **light speed**:  $c = 3 \cdot 10^8$  m/s.
  - $r = 3 \cdot 10^8 \cdot 10^{-12} = 0.3\text{mm}$
- 1 TB of data in  $0.3 \text{ mm}^2$  **surface**:
  - Each data to be stored in 3 Angmstroms (approx.)
    - The size of a small atom!
- **CONSEQUENCE**: Sequential approach not feasible.

# Parallelism Kinds

- All computers have cost and energy restrictions.
- **Parallelism** emerges as main mechanism to design computers.
- **Types of application parallelism:**
  - **Data parallelism:** Same operation applied to many data.
  - **Task parallelism:** Tasks operate independently and in parallel.

# Hardware parallelism

- **ILP**: Instruction-Level Parallelism.
  - Exploits data-parallelism with compiler help (pipeline, speculative execution, ...).
- **Vector** architectures and GPUs.
  - Exploit data parallelism applying the same instruction to several data in parallel.
- **TLP**: Thread-Level Parallelism.
  - Exploits data or task parallelism in highly coupled hardware.
  - Allows inter-thread interactions.
- **RLP**: Request-Level Parallelism.
  - Exploits parallelism among highly decoupled tasks.

# Flynn Taxonomy (1966)

- A classification of possible parallel architectures.
- **SISD**: Single Instruction / Single Data Stream.
  - Mono-processor.
  - May use ILP techniques.
- **SIMD**: Single Instruction / Multiple Data Stream.
  - Same instructions executed by different processors on distinct data items.
  - **Alternatives**: Vector processors, multimedia extensions, and GPUs.
- **MISD**: Multiple Instructions / Single Data Stream.
  - No known commercial implementation.
- **MIMD**: Multiple Instructions / Multiple Data Stream.
  - Each processor operates on its own data items  $\Rightarrow$  Task Parallelism.

# More about MIMD

- Variety in **MIMD** architectures:
  - Highly coupled architectures.
    - **TLP** (*Thread-Level Parallelism*): Multi/Many-core architectures.
  - Weakly coupled architectures:
    - **RLP** (*Request-Level Parallelism*): Clusters and WSCs.
  
- **MIMD** is:
  - More flexible and general than SIMD.
  - More expensive than SIMD.
  - Requires enough task granularity.



- 1 Introduction
- 2 Historic perspective
- 3 Classification
- 4 Parallelism
- 5 Computer Architecture**
- 6 Conclusion

# Activity

- Read section 1.3 of Hennessy & Patterson.
  - Defining Computer Architecture.



- 1 Introduction
- 2 Historic perspective
- 3 Classification
- 4 Parallelism
- 5 Computer Architecture
- 6 Conclusion

# Summary

- **Moore's law** still alive.
  - But *"The free lunch is over"*.
- New models improve performance (**DLP**, **TLP**, **RLP**) but require application restructuring.
- Diversity in computer classes with varied properties and requirements.
  - PMD, Desktop, Servers, WSC, Embedded.
- Emerging architectures combining **SIMD** and **MIMD**.
- ISA is different from *architecture*.

# References

- **Computer Architecture. A Quantitative Approach**

5th Ed.

Hennessy and Patterson.

Sections 1.1, 1.2, and 1.3.

- **The Free Lunch is over.**

Herb Sutter.

<http://www.gotw.ca/publications/concurrency-ddj.htm>

- **Welcome to the Jungle.**

Herb Sutter.

<http://herbsutter.com/welcome-to-the-jungle/>

# Fundamentals of Computer Design

## Computer Architecture

J. Daniel García Sánchez (coordinator)  
David Expósito Singh  
Javier García Blas

ARCOS Group  
Computer Science and Engineering Department  
University Carlos III of Madrid