



EVOTEKS

CATALOG SOLUTION



Surveillance

VGA (640 x 480)



V1100

H.264 1ch Video Server

H.264/MPEG-4/MJPEG Compression format with 1 analog video input, 3 streams, 30 fps@Full D1, RS485, PoE Built in, HTTPS Encryption, Two-way Audio, SD Card Slot, 1 Alarm in / 1 Alarm out, 128 Presets, 4 Patrols, 32ch Software Bundled

VGA 720p (1280 x 720)



F3000

VGA(H.264) Cube Type IP Camera

30fps@ 640x480; 1/4"CMOS, 4.0mm F2.0 lens, One way built mic, Local storage micro SD, minimum of 0.2lux @F2.0



F531E

Outdoor 15M IR IP Camera

1/4" Progressive Scan CMOS, 4.3mm F2.0 lens, VGA (640 x 480), MPEG-4/MJPEG Dual Streaming, 30FPS@All Resolutions, Automatic removable IR-cut Filter, 15m IR LED, PoE Built-in, Two-way Audio, 1 alarm in / 1 alarm out,3GPP/ 2.5G mobile support, SSL (HTTPS) V3.0, IP66 rated (including Bracket, Adaptor)



D7111

720P Outdoor Dome Type Day/Night IP Camera

30fps @1280x800, PoE; 1/4" CMOS, 2.7-9.0mm F1.2 lens, minimum of 0.05lux @F1.2(color)-0.001lux(B/W)-0 lux (IR on), IR 20m range, Local storage Micro SD card, PoE, 3-axis, IP66 Weatherproof, IK10 vandal proof



P5111

1 Megapixel Pan-Tilt Type Day/Night IP Camera

PoE; 1/4" CMOS,4.0mm F1.8 lens, minimum of 0.2lux @F1.8(color)-0.001lux(B/W)-0 lux (IR on), IR 10m range, Local storage Micro SD card, PoE, 3-axis, PoE,one way built in mic, PoE, motorized 354 degree and 124 degree tilt

Full HD 2 MegaPixel (1920 x 1080)




F7210

H.264 Full HD 2MPx D/N IP Camera built in Wireless
1/2.7"CMOS, 3.0-8.0mm F1.2 lens, Mechanical IR-cut fitler, Local storage micro SD, minimum of 0.08lux @F1.2 (color) - 0.001 lux (B/W) , PoE



B6210

2 Megapixel Bullet Type Day/Night IP Camera
1/2.8" Megapixel CMOS Sony Exmor sensor. H.264/MJPEG with 4 Streams, IR cut filter with Light Sensor, 20m IR Range, POE, IP 66 Rated Housing, incl. bracket , 64ch Software Bundled,
Smart Feature: Corridor Mode, Rol

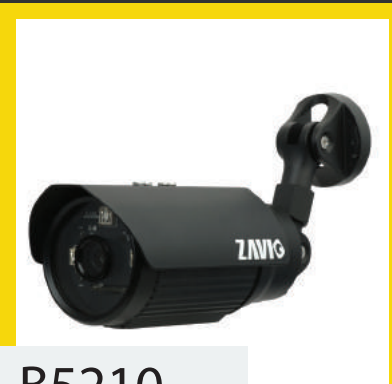

B5210

2Megapixel Bullet Type Day/Night IP Camera
1/2.7"CMOS, 4.0mm F1.8 lens, Mechanical IR-cut fitler 15m adjustable, Local storage micro SD, minimum of 0.08lux @F1.2 (color) - 0.001 lux (B/W) - 0 lux (IR on), IP67 Weather proof, PoE, 3 axis bracket.



B6220

2Mp Outdoor Day/Night Bullet Varifocal IP Camera
Day & night, outdoor bullet type IP camera designed with Full HD 1080p resolution. It adopts varifocal auto-iris lens, removable IR-cut filter and high performance IR LEDs, providing vivid image quality throughout the full range of day and night scenes and 40m working distance while LED on. IP66 weatherproof housing, and cable management bracket, ZAVIO B6220is ideal for 24/7 outdoor surveillance.



B8210

2Megapixel Motorized Outdoor Bullet Camera
FullHD 1080p, Last generation SONY Exmor sensor, P-Iris, 2.8-12mm Motorized lense (zoom/focus), Wide angle, Smart IR 40m, PoE, Sdcard, Day/Night, Smart focus,Ip 66, 2-way Audio. **Smart Feature: Smart IR, Corridor Mode, Rol with different FPS, Edge Recording, defog detectionWide Dynamic Range: 120 dB**



D4211

2Megapixel IR Mini Dome IP Camera
PoE; 1/2.8" CMOS, 2.8mm F1.8 lens, minimum of 0.05lux @F1.8 (color) - 0.001 lux (B/W) - 0 lux, 15m range IR, MicroSD card slot, PoE, 3-axis, PoE, two way built in mic and speaker, 3-axis, IK08 vandal proof
Optional: Ltype Braket & IP67 junction Box
Smart Feature: Corridor Mode, Rol



D6210

2 Megapixel IP66 Type Day/Night IP Camera

1/2.8" Megapixel CMOS Sony Exmor sensor. H.264/MJPEG with 4 Streams, 30fps@1920x1080, IR cut filter with Light Sensor, 25m IR Range, POE, IP66 Rated Housing. Dimension:φ44 x 107.9 x 76.8mm, incl. bracket, incl. bracket, 64ch Software Bundled, Package including Bracket, Installation Tools. **Smart Feature: Corridor Mode, Rol**



P6210

2Megapixel Pan/Tilt Indoor IR Mini Dome IP Camera

PoE; 1/2.8" CMOS, 3.6mm F1.8 lens, minimum of 0.05lux @F1.8(color) -0.001lux(B/W)-0 lux (IR on), IR 15m range, Local storage Micro SD card, PoE, 3-axis, PoE, two way built in mic and speaker, motorized 330degree and 67 degree tilt, IK08 vandal proof **Smart Feature: Corridor Mode, Rol**



D8210

2Megapixel P-Iris Motorized Outdoor Dome


Full HD 1080p, SONY CMOS sensor, P-iris, 2.8-12mm motorized lens with smart focus, 20m adaptive IR, SD card slot. IP66+IK10, PoE, 2 way Audio, H.264. **Smart features: Smart IR, ROI, and corridor mode.**

NVR Full HD real time 1080P Resolution



NVC-2080

Supports up to 8 channels
One-click setup for more than 100 brands of IP cameras
Full HD 1080p; 2bay x 4TB
HDMI and VGA dual video output
2-way audio and 8 alarm inputs, 2 alarm outputs
Linux embeded
Through output 80MBs



NVC-2160

Supports up to 16 channels
One-click setup for more than 100 brands of IP cameras
Full HD 1080p; 2bay x 4TB
HDMI and VGA dual video output
2-way audio and 8 alarm inputs, 2 alarm outputs
Linux embeded
Through output 80MBs

2 Megapixel Full HD (1920 x 1080) @ 60 FPS



B8220

2 Megapixel @60fps IP66 Bullet with - Remote focus
1/3" Megapixel CMOS Panasonic sensor, 2.8-12mm F1.6 Motorized P-iris lens, Smart Focus Control, H.265/H.264/MJPEG, 60fps@1920x1080, Two-way Audio , IR cut filter with Light Sensor, 40m Smart IR Range (with Power IR LEDs), SDXC Slot, PoE, Analog Video Output, 2 Alarm-in / 2 Alarm-out, IP66 and Built-in Fan & Heater, Operating conditions:-50~60°C (-58~140°F). Dimension: 383 x 152 x 243mm (incl. bracket), 64ch Software Bundled.
Smart Feature: Smart IR, Corridor Mode, Rol with different FPS, Edge Recording, defog detection Wide Dynamic Range: 120 dB



D8220

2 Megapixel @60fps IP66/IK10 Dome - Remote focus
1/3" Megapixel CMOS Panasonic sensor, 2.8-12mm F1.4 Motorized P-iris lens, H.265/H.264/MJPEG,60fps@1920x1080, Two-way Audio , IR cut filter with Light Sensor, 20m Smart IR Range (with Power IR LEDs),SDXC Slot, PoE, Analog Video Output, 1 Alarm-in / 1 Alarm-out, IP66 & IK10 and Built-in Fan, Operating conditions:-40~60°C (-40 ~140°F) Dimension: 125 x 165(φ) mm, 64ch Software Bundled
Smart Feature: Smart IR, Corridor Mode, Rol with different FPS, Edge Recording, defog detectionWide Dynamic Range: 120 dB

3 Megapixel Full HD (2304 x 1296) @ 30 FPS



B6320

3 Megapixel @30fps IP66 Bullet Fixed Lens
1/3" Megapixel CMOS sensor. H.265/H.264/MJPEG. 30fps@2304 x 1296, True WDR IR cut filter with Light Sensor, 20m IR Range, POE, IP 66 Rated Housing. Dimension:φ66 x 165 x 89mm, incl. bracket , 64ch Software Bundled. lense 2.8mm **Smart Feature: Corridor Mode / Rol with different FPS / defog detection Wide Dynamic Range: 90 dB**



B6330

3 Megapixel @30fps IP66 Motorized Bullet Camera
1/3" Megapixel CMOS sensor. H.265/H.264/MJPEG. 30fps@2048 x 1536, True WDR IR cut filter with Light Sensor, 30m IR Range, POE, IP 66 Rated Housing. Dimension:φ66 x 165 x 89mm, incl. bracket , 64ch Software Bundle lense 2.8-12mm motorized zoom, focus. SD card slot **Smart Feature: Corridor Mode / Rol with different FPS / defog detection**



D6320

3 Megapixel @30fps IP66 Eyeball camera Fixed Lens
1/3" Megapixel CMOS sensor. H.265/H.264/MJPEG. 30fps@2048 x1536, True WDR IR cut filter with Light Sensor, 25m IR Range, POE, IP 66 Rated Housing. Dimension:φ44 x 107.9 x 76.8mm, incl. bracket, 64 ch Software Bundled. lense 2.8mm. **Smart Feature: Corridor Mode/ Rol with different FPS / defog detection.Wide Dynamic Range: 90 dB**



D4320

3 Megapixel IR Mini Dome IP Camera

PoE; 1/3" CMOS, 2.8mm F1.8 lens, minimum of 0.05lux @F1.8 (color) - 0.001 lux (B/W) - 0 lux, 15m range IR, MicroSD card slot, PoE, 3-axis, PoE, two way built in mic and speaker, 3-axis, IK08 vandal proof.

IP66 Optional junction Box **Smart Feature: Corridor Mode, Rol**



D6330

3 Megapixel @30fps IP66 Motorized Dome Camera

1/2.8" Megapixel CMOS sensor. H.265/H.264/MJPEG. 30fps@ 2048 x 1536, True WDR IR cut filter with Light Sensor, 30m IR Range, POE, IP 66 Rated Housing. 64ch Software Bundle lense 2.8-12mm

motorized zoom, focus. SD card slot, IK08 **Smart Feature: Corridor Mode / Rol with different FPS / defog detection**

5 Megapixel (2560 x 1920) @ 30 FPS or (1920 x 1080) @ 60 FPS



B6520

3 Megapixel @30fps IP66 Bullet Fixed Lens

1/3" Megapixel CMOS sensor. **H.265/H.264/MJPEG. 30fps@2304 x 1296, True WDR** IR cut filter with Light Sensor, 20m IR Range, POE, IP 66 Rated Housing. Dimension:φ66 x 165 x 89mm, incl. bracket , 64ch Software Bundled. lense 2.8m **Smart Feature: Corridor Mode / Rol with different FPS / defog detection Wide Dynamic Range: 90 dB**



B6530

5 Megapixel@30fps IP66 Motorized Bullet Camera

1/3" Megapixel CMOS sensor. H.265/H.264/MJPEG. 30fps@2560 x 1920, True WDR IR cut filter with Light Sensor, 30m IR Range, POE, IP 66 Rated Housing. Dimension:φ66 x 165 x 89mm, incl. bracket , 64ch Software Bundle lense 3.6-10mm motorized zoom, focus. SD card slot **Smart Feature: Corridor Mode / Rol with different FPS / defog detection**



B8520

5 Megapixel@30fps IP66 Bullet - Motorized Varifocal Lens / P-Iris

1/1.8" Megapixel CMOS sensor, 3.6-10mm F1.6 **Motorized P-iris** lens, Smart Focus Control, **H.265 /H.264/MJPEG,30fps@2560x1920, 60fps@1920x1080**, Two-way Audio , IR cut filter with Light Sensor, **40m Smart IR Range** (with Power IR LEDs), SD Card Slot, **True WDR**, PoE, Analog Video O/ 2 Alarm-in / 2 Alarm-out, IP66 and **Built-in Fan & Heater**, Operating conditions:-50~60°C (-58~140°F). Dimension: 383 x 152 x 243mm (incl. bracket), 64ch Software Bundled.

Smart Feature: Smart IR, Corridor Mode, Rol with different FPS, Edge Recording, defog detection Wide Dynamic Range: 120 dB



D6520

5 Megapixel @30fps IP66 Eyeball camera Fixed Lens

1/3.2" Megapixel CMOS sensor. H.265/H.264/MJPEG. 30fps@2560x1920, True WDR IR cut filter with Light Sensor, 25m IR Range, POE, IP 66 Rated Housing. Dimension:φ44 x 107.9 x 76.8mm, incl. bracket , 64ch Software Bundled. lense 2.8mm. **Smart Feature: Corridor Mode / Rol with different FPS / defog detection.Wide Dynamic Range: 90 dB**



D4520

5Megapixel IR Mini Dome IP Camera

PoE; 1/3.2" CMOS, 2.8mm F1.8 lens, minimum of 0.05lux @F1.8 (color) - 0.001 lux (B/W) - 0 lux, 15m range IR, MicroSD card slot, PoE, 3-axis, PoE, two way built in mic and speaker, 3-axis, IK08 vandal proof **Smart Feature: Corridor Mode, Rol**



D6530

5 Megapixel@30fps IP66 Motorized Dome Camera

1/1.8" Megapixel CMOS sensor. H.265/H.264/MJPEG. 30fps@2560x1920, True WDR IR cut filter with Light Sensor, 30m IR Range, POE, IP 66, IK08. 64ch Software Bundle lense 3.6-10mm motorized zoom, focus. SD card slot **Smart Feature: Corridor Mode / Rol with different FPS / defog detection**



D8520

5 Megapixel@30fps IP66/IK10 Dome - Motorized Varifocal Lens

1/1.8" Megapixel CMOS sensor, 3.6-10mm F1.6 **Motorized P-iris lens**, Smart Focus Control, **H.265/H.264/MJPEG,30fps@2560x1920, 60fps@1920x1080**, Two-way Audio, IR cut filter with Light Sensor, 20m **Smart IR Range** (with Power IR LEDs), SD Card Slot, **True WDR** PoE, Analog Video Output, 1 Alarm-in / 1 Alarm-out, IP66 and **Built-in** Fan. Operating conditions:-40~60°C(-40 ~140°F) Dimension: 125 x 165(φ) mm, 64ch Software Bundled **Smart Feature: Smart IR, Corridor Mode, Rol with different FPS, Edge Recording, defog detection Wide Dynamic Range: 120 dB**



D4320

3 Megapixel @30fps Indoor Panoramic Fisheye IP Camera

1/3" 4 Megapixel CMOS sensor, H265/H264/MJPEG, 30fps@2048x1520, 1.05mm. F2.0 fisheye lens, True WDR, IRCut Filter, Digital in/output, SDXC Slot, RTC with built-in battery, Built-in Microphone. Dim: 54 x 115 (φ)mm, 64ch Software Bundled. **Smart Feature: Rol with different FPS / Edge Recording / defog detection Wide Dynamic Range: 90 dB**



D4520

5 Megapixel@30fps Indoor Panoramic Fisheye IP Camera

1/1.8" Megapixel CMOS sensor, H265/H264/MJPEG, 30fps@2560x1920, 1.49mm. F2.0 fisheye lens, True WDR, IRCut Filter, Digital in/output, SDXC Slot, RTC with built-in battery, Built-in Microphone. Dim: 54 x 115 (φ)mm, 64ch Software Bundled. **Smart Feature: Rol with different FPS / Edge Recording / defog detection Wide Dynamic Range: 120 dB**



Access Control

Rosslare-Access Control



AC-215

2 Door Controller Pannel, 5000 users incl. Power Supply without backup battery, MS access database



AC-225

2 Door Controller Pannel, 30.000 users incl. Power Supply without backup battery, SQL database



AC-225IP

2 Door Controller Pannel, 30.000 users incl. Power Supply without backup battery, SQL database, on board TCP/IP



AC-425

Two or Four-Door topology, networked up to 1023 panels to one PC. Full online/offline operation. 30,000 Users, 20,000 event history. Compatible with MD-IO84 IO 8 Input / 4 Output IO Expander and MD-D04 Four Door Expander. Advanced event-action logic engine.



AC-425IP

4-Door- IP Scalable Networked Access Controller – 230VAC



AC-225-4

4 Door Controller Pannel, 300.000 Users incl. Power supply without backup battery, SQL database



AC-225IP-4

4 Door Controller Pannel, 300.000 Users incl. Power supply without backup battery, SQL database



AC-425-8

8 Door Controller Pannel, 300.000 Users incl. Power supply without backup battery, SQL database, on board TCP/IP



AC-425IP-8


8 Door Controller Pannel, 300.000 Users incl. Power supply without backup battery, SQL database



AC-825IP


4-door networked access controller, The controller comes with one onboard expansion slot and can be further expanded by connecting up to 12 expansion boards via OSDP*, can handle to 58 doors and 60,000 users.

Expanse Elevator Controller

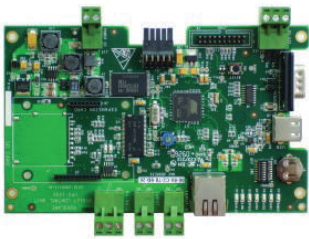


EXP 1302

Expanse Networked Controller




EXP 2016

16 Relay Elevator Control Unit



EXP 2024

Dual Reader Door Unit



EXP 2088

8-Inputs / 8-Outputs Interface



ME-00

9 Board Tray Cabinet Housing



ME-01-P14E

Single Board Self Powered Metal Enclosure -230 VAC



Single Board Self Powered Plastic Enclosure -230 VAC

ME-01-P14E



Compact Single Board Plastic Enclosure

ME-14

Reader



Single Door controller, 2400 users, up to 8 panels

AC-115



500 users Prox/Pin Standalone Controller, waterproof.

AC-F44



US Single Gang PROX Reader

AY-HR12



Mullion PROX Reader

AY-LR12



Micro Million Prox Reader

AY-KR12



Keypad & Prox Reader/Controller - Backlight Keypad

AYC-Q64B



Backlit PIN & Prox Reader / Controller

AYC-F64

Accessories



RS485/RS232 Interface Cable

MD-14




Serial to Ethernet Cable for AC-215

MD-N32



Serial to Ethernet Modem for AC-215

MD-N33



MP-D02

Expansion Board to 4 doors



MD-D04

4-Door Expansion Module for AC-425/425IP



MD-I084

8-Input & 4-Output Expansion Module for AC- 225/225IP/425/425IP/525



R-805

Board For AC-825IP, Relay Output Expansion Board(16 x 5A Form C Relays Outputs)



S-805

Board For AC-825IP, Supervised Input Expansion Board (16 x Supervised Analog Inputs)



D-805

Board For AC-825IP, Door Expansion Board (4 x Wiegand Readers, 4 x 5A Form C Relay Outputs,8 x Supervised Analog Inputs)



P-805

Board For AC-825IP, PLC I/O Expansion Board (16 x Supervised Analog Inputs, 8 x 5A Form C Relay Outputs)



ME-1505

ME-1505 Enclosure - Fits two R/S/D/P-805 Expansion Boards (same internal features as ME-1525 enclosure)

Proximity Cards



PC-080

EM Proximity Card 0.80 mm (thin)



PC-1.75

EM Proximity Card 1.75 mm (thick)

Power Supply



PS-C17

2A Power Supply without Backup Battery



EBL

Backup Battery 12VDC

Microdrive Magnetic Parking



M.Parking

Lane width max 3.5 m
Opening / closing time 1.8 s
Power consumption max. 35 W
Standard colours RAL 2000
Control unit MGC



M.Parking Pro

Lane width max 3.5 m
Opening / closing time 1.3 s
Power consumption max. 95 W
Standard colours freely selectable
Control unit MGC Pro



M.Parking Select

Lane width max 3.5 m
Opening / closing time 1.3 s
Power consumption max. 95 W
Standard colours 3 variants
Control unit MGC Pro



















Product Solution



















Evo Parking Solution

Entry

Object	Car			Motorcycle		
						
Device	Parking Gate	CCTV	Dispencer	UPS	Controller	RFID Reader
						
Tenant Guest	RFID Card	Conventional Entry		Manless Entry		
	 Ticket  <small>REKAMBI KAKIOT Di Pasir Putih (No. 42) - Bontol — RTANGHUT MOTOR Rp. 100.000.000.000.000 CART - 100.000.000.000.000 GARA - 10.000.000.000.000 Rp 1,000 KODE: 1 MOTOR / DAB 1 MOTOR / DAB 1 Tutupkan atau bongkar anda</small>					
Picture						

Exit

Object	Car	Motorcycle		Mini PC	QR Scanner	
						
Device	Parking Gate 	CCTV 	Dispencer 	UPS 	Controller 	RFID Reader 
Tenant Guest	RFID Card 	Ticket  <small>REKAMBI MOTOR Rp 1,000 PNS / DAB 1 MOTOR / DAB 1 Tutupkan atau bongkar anda</small>				
Picture						




Access Control Solution



Access Control Solution

- Access Door & Lock
- Visitor Management
- Elevator Controller
- Pedestrian Gate
- Parking Solution

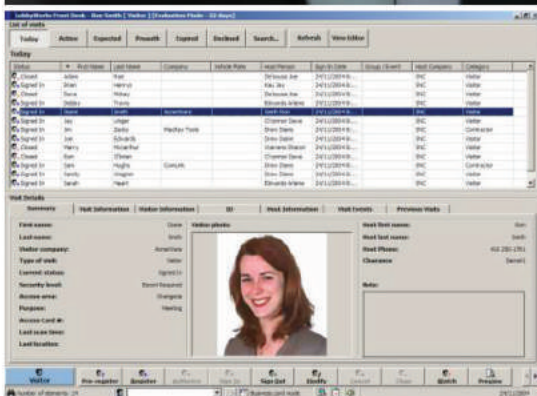

Burglar Alarm Solution



Alarm Systems Solution

- Door Sensor
- Motion Sensor
- Passive Infrared
- Photo beam
- Smoke detector






CCTV Solution

Analogue Camera

Network / IP Camera

Thermal Camera

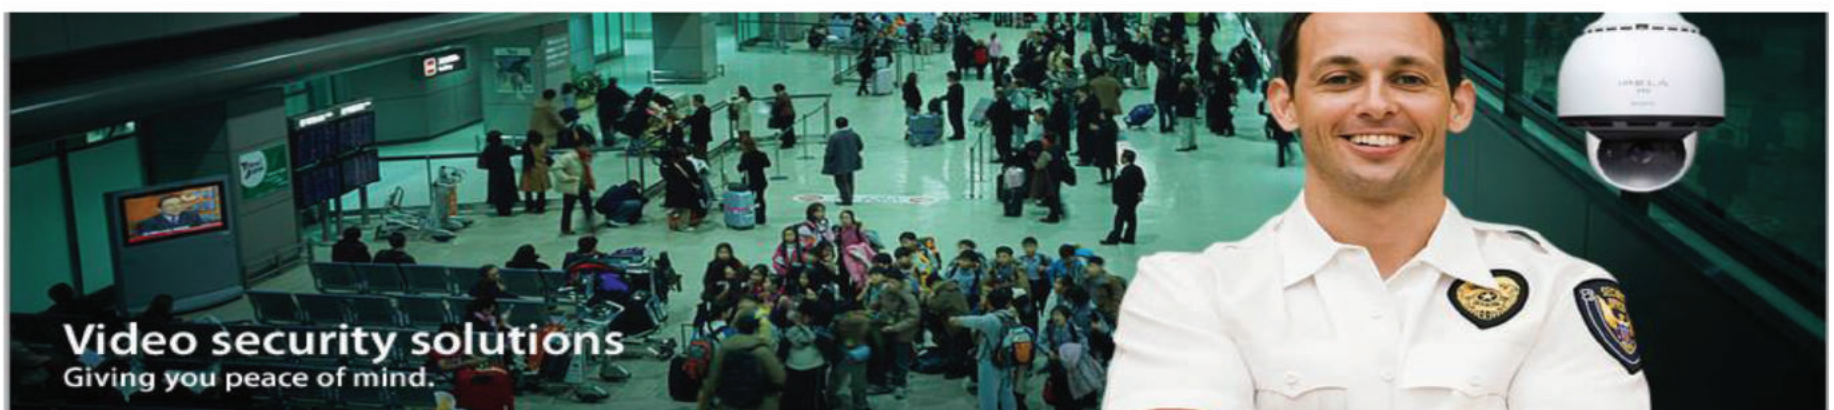

Cameras and Encoders

Recording Solutions


Accessories



Entrance / Perimeter Security System



UVSS




Parking Gate




Access Control



Detection System



Screening System

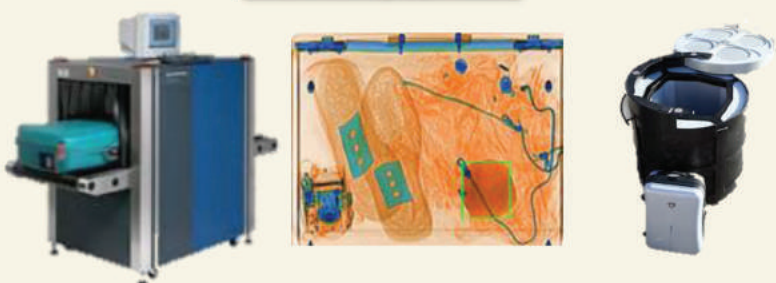

Security System



Alarm system

Surveillance

Guard Tour

Indoor Security System

Detection System



Access & Elevator Controller / Video Phone



Pedestrian Gate





Monitoring Systems



Alarm system / Door Monitoring

Key Management Systems

Security System

























Guard Tour














Visitor Management

Face server




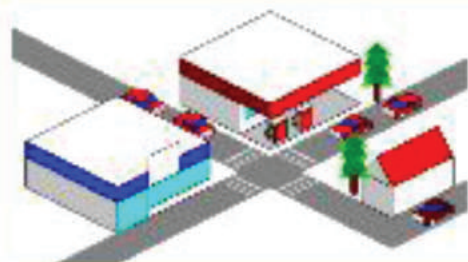







Entrance / Perimeter Security System

OBJECT						
DEVICE	<div>Under Vehicle Scanner</div>	<div>Boom Detector</div>	<div>Parking Gate</div>	<div>Road Blocker</div>	<div>Metal Detector</div>	<div>X-Ray Detection</div>
TENANT			<div>Access Card</div>		<div>Pass</div>	<div>Pass</div>
GUEST			<div>Ticket</div>			
PICTURE						

Indoor Security System

OBJECT				
DEVICE	<div>Visitor Management</div> 	<div>Passenger Gate</div> 	<div>Lift Call</div> 	<div>Lift Access</div> 
TENANT	<div>Pass</div> 		<div>Executive Lift</div> 	
GUEST				
PICTURE	<div></div>			

Surveillance System

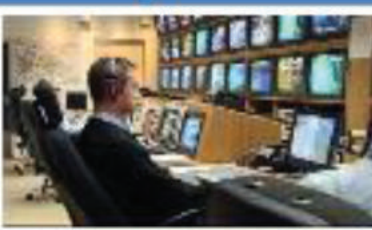OBJECT				
DEVICE				
TENANT				
GUEST				
PICTURE				



www.evoteks.co.id

halo@evoteks.co.id