

SOLID HOUSING SOLUTION (CA0247182-X)

(IBS-SIP System)

FIBER REINFORCE LIGHTWEIGHT CONCRETE

LICENSE / TRAINING / TECHNOLOGY TRANSFER

SUPERVISION & CONSULTATION

STAY IN PLACE FORMWORK

www.shss.my

SHS

Solid Housing Solution



New Construction Technology

Technical Description

SIP - Stay In Place is a formwork or mold system size 500mm x 1,000mm (0.5 m2 or 5.38sq ft per set) for house construction, cavity for concrete filling can be 100mm to 200mm. The SIP panel is 12mm thick and has 2 versions; one a ready set while another is with clip-on spacer to combine to be a set. This SIP set can also be made with finish surface such as wall tile, wallpaper or with colorful cemented finish so that when set up and concrete fill the wall is a ready finish wall with no further painting require.







Summary of Invention

SIP Patented system cast houses or high-rise walls with no need for columns or beams, no brick or blocks as well as no plastering. Simple to set-up and fill, can combine concrete at structured area with foam concrete. SIP system construct houses that are well insulated, fire-proof, sound-proof, cyclone-proof and earth-quake resistant houses, no need for skill workers such as carpenters and bricklayers and plasterers cheaper by at least 40% to 70%. Easy to be train and unskilled people can learn SIP and very fast way to build

SIP - Stay In Place formwork construction method is my invention of a greater way to built landed house with no need for columns and beams as it is already a structure as SIP method is to fill any chosen concrete grade into the cavity of the SIP sets, there is no need for brickworks and no plastering which is expensive plus labour consuming. Infilling of either concrete, mortar or lightweight concrete is better as it is going to be 100% fire-proof, sound-proof, cyclone-proof and earthquake resistant. SIP sets can even be set up and mortar patch well and no need for further concrete infillings into the cavity as can be hollow also or just with muds.



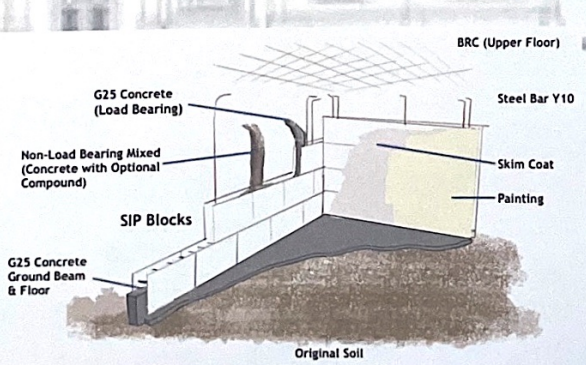


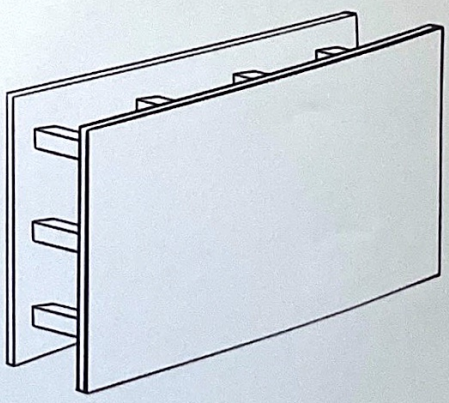





APPLICATIONS

- Building / Constructions
- Houses / Low Cost Houses
- Highway Constructions
- Trench Reinstatement
- Void Filling
- Footing
- Tunnel Lining
- Blinding
- Roof Insulation
- Block Panel
- etc

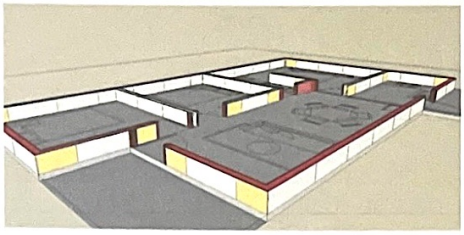

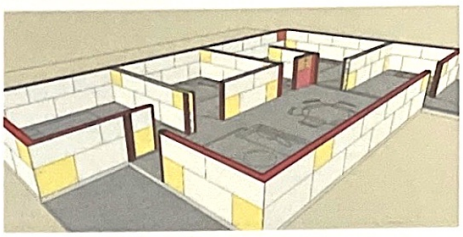

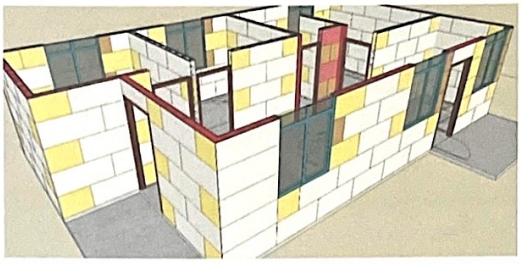


Density (kg/m3)	Applications
⩽ 300	Insulation boards infills similar to mineral-based and other man-made insulatoin boards such as polystyrene, polyurethane or mineral wool with no hazardous threat to health, enviroment or fire.
350-550	Thermal insulation or fire protection, block filling, roof-decking and void filling materials.
600-800	Void filling, such as in landscaping (above/underground construction), behind archways and refurbishing damaged sewerage systems, as well as producing masonry blocks and panels.
800-1000	Production of blocks, other non-load bearing building element such as balcony railings, partitions, parapets etc.
1100-1400	Prefabricated and cast in place walls, either load bearing or non-load bearing. It can be successfully used as floor screeds.
1500-1800	Recommended for slabs, foundations and other load-bearing building element where higher strength is obligatory










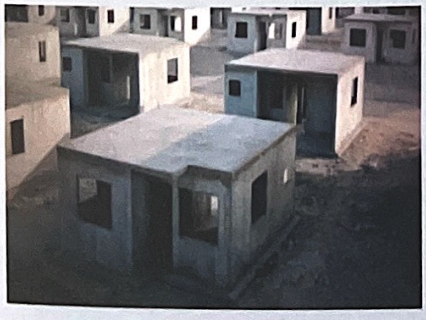

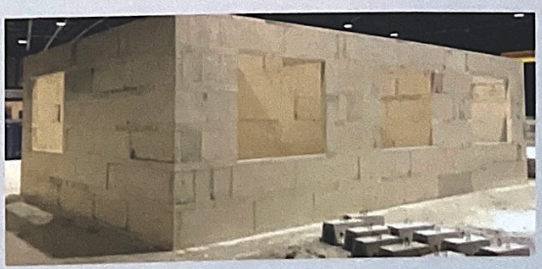












www.lcm.my
SHS
Solid Housing Solution Systems

SOLID HOUSING SOLUTION (IBS System)
(CA0247182-X)

www.lcm.my

A-658, Jalan Alor Akar,
25250 Kuantan, Pahang, Malaysia.

Mobile : +60 19-9160861
Fax : +60 9-5662913
Website : www.lcm.my
E-mail : lightweightconcrete@gmail.com
lightweightconcrete@yahoo.com

Foam - Concrete
Technology Transfer
Equipment, Foaming Agent
Training and Supervision





SIRIM TESTED
4 HOURS
FIRE RATING





