

RF MATCH + ANTENNA




MCU — nRF54L15-QFAA

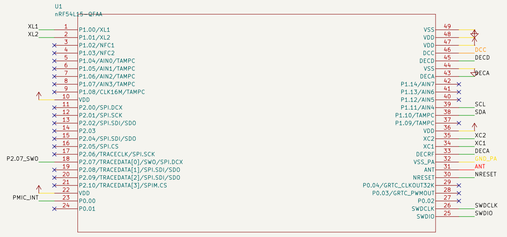

MCU SUPPORT (Nordic ref cfg 1)

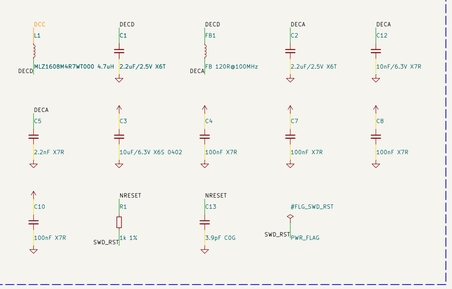

CLOCKS




SWD


PMIC — nPM1300 (charger / power path / ADC)

USB-C + SOLAR INPUT

BATTERY + CHARGE STATUS



SENSE FRONT END — FDC1004

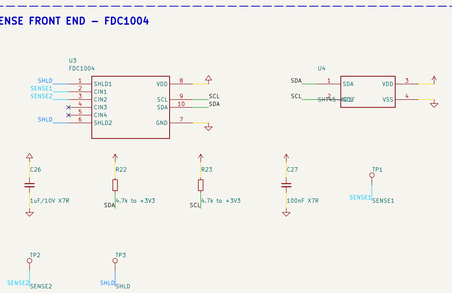

See HARDWARE.md for rationale, LAYOUT.md for the zone map
Rails are power symbols; labels are signals. Generated by tools_gen_sch.py
Block order is board order: antenna end top-left to probe tip bottom-right
nRF54L15-QFAA + nPM1300-QEAA + FDC1004 — BTHome v2 over BLE

Sheet: /
File: moisture-sensor-carrier.kicad_sch

Title: Indoor Capacitive Soil Moisture Sensor

Size: A1	Date: 2026-07-31	Rev: C
KiCad E.D.A. 10.0.5		Id: 1/1