




## 105 °C - 300 Volt - UL PLTC/ITC

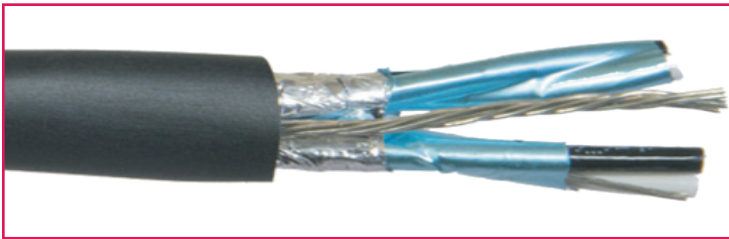

### Product Construction

#### Conductor:

- Annealed Bare Copper
- 7 Strands Class B

#### Insulation:

- Polyvinyl Chloride (PVC)

#### Pair Drain Wire:

- 7 Strand Tinned Copper

#### Individual Shield:

- FFE Aluminum Mylar - 100% coverage

#### Drain Wire:

- 7 Strand Tinned Copper

#### Overall Shield:

- Aluminum Mylar Tape - 100% coverage

#### Ripcord:

- Yes

### Applications

- Cable is suitable for use in Class I Division II hazardous locations
- Cable is UL approved for sunlight resistant and direct burial applications

### Standards

- UL listed as type PLTC & CL3 per UL standard 13 and as type ITC per UL standard 2250
- Meets CSA standard C22.2 #239 C(UL) CIC 300V 90°C
- IEEE 1202 available upon request
- All materials used in the manufacture of this cable is RoHS compliant

### COLOR CODE CHART

Cond. #	Color	13	Black, White & Numbered
1	Black, White & Numbered	14	Black, White & Numbered
2	Black, White & Numbered	15	Black, White & Numbered
3	Black, White & Numbered	16	Black, White & Numbered
4	Black, White & Numbered	17	Black, White & Numbered
5	Black, White & Numbered	18	Black, White & Numbered
6	Black, White & Numbered	19	Black, White & Numbered
7	Black, White & Numbered	20	Black, White & Numbered
8	Black, White & Numbered	21	Black, White & Numbered
9	Black, White & Numbered	22	Black, White & Numbered
10	Black, White & Numbered	23	Black, White & Numbered
11	Black, White & Numbered	24	Black, White & Numbered
12	Black, White & Numbered	25	Black, White & Numbered