

Personalized Deep Learning Model for Closed-Loop 40 Hz Entrainment to Optimize Theta-Gamma Coupling in Alzheimer’s Disease

Amaar Chughtai

Abstract

Alzheimer’s disease affects over 55 million people worldwide, and emerging research shows that 40 Hz auditory stimulation can drive gamma-frequency brain rhythms that help clear toxic amyloid-beta plaques. Current protocols deliver this therapy on a fixed schedule, ignoring individual responses; some patients habituate within minutes while others maintain entrainment. This project proposes a closed-loop deep learning system to predict when a patient’s brain will lose entrainment, enabling individualized stimulation timing. I analyzed EEG recordings from 35 elderly subjects including dementia patients and healthy controls (OpenNeuro ds005048) and computed phase-amplitude coupling (PAC), the coordination between slow theta-band and fast gamma-band brain rhythms, as a real-time biomarker of entrainment strength. I engineered 73 causal features from spectral, PAC-history, and stimulation-context signals, then trained a causal Temporal Convolutional Network (TCN, 31,000 parameters) to forecast PAC five to ten seconds ahead. The TCN was integrated into a closed-loop controller and validated on all 35 subjects’ EEG. In a comparative horizon sweep, all baselines collapsed to negative R^2 at five-to-ten-second horizons while the TCN maintained R^2 of 0.25, a +0.5 margin. The controller matched stimulation to periods of need 72.1% of the time versus 64.5% for reactive control ($p < 0.001$) and targeted 82.6% of low-PAC windows versus 51.7% ($p < 0.001$), reaching 91% of the theoretical oracle. Every subject benefited ($p < 0.001$), and the advantage held across six fatigue severity levels. These results demonstrate that forecasting PAC enables personalized 40 Hz therapy that outperforms fixed and reactive protocols, a path toward more efficient treatment for Alzheimer’s disease.

Keywords: 40 Hz entrainment, phase-amplitude coupling, temporal convolutional network, closed-loop neuromodulation, Alzheimer’s disease, EEG, predictive control

1 Introduction

1.1 Clinical Burden of Alzheimer’s Disease

Alzheimer’s disease (AD) is a progressive neurodegenerative disorder and the leading cause of dementia worldwide. Over 55 million individuals currently live with dementia globally, a figure projected to nearly triple to 153 million by 2050 [1]. AD accounts for 60-70% of all dementia cases and imposes an enormous societal burden: in the United States alone, the annual economic cost exceeds \$300 billion [1]. Despite decades of pharmaceutical research, approved disease-modifying treatments remain narrow in their benefits, underscoring the urgent need for novel therapeutic strategies.

A rapidly emerging non-pharmacological approach is sensory-evoked gamma entrainment – the use of 40 Hz auditory or visual stimulation to synchronize gamma-frequency (30-100 Hz) brain oscillations. Iaccarino et al. [5] demonstrated in a landmark Nature study that driving gamma oscillations at 40 Hz in transgenic

mouse models of AD reduced amyloid-beta by up to 50% through microglial activation and enhanced phagocytic clearance. Most recently, Chan et al. [8] reported results from a Phase II open-label extension study showing that sustained 40 Hz multisensory stimulation slowed brain atrophy in mild AD patients and reduced plasma phosphorylated tau (pTau217) by 19-47% – the first human clinical evidence of target engagement at this scale.

These findings position 40 Hz gamma entrainment as a promising therapeutic avenue. However, all existing clinical implementations deliver stimulation on a rigid fixed schedule, entirely independent of the patient’s real-time neural state. This one-size-fits-all approach ignores substantial inter-individual variability in entrainment response and progressive intra-session habituation, rendering fixed protocols systematically suboptimal. The present work addresses this gap by developing a predictive, closed-loop control system that forecasts future entrainment state to enable proactive, personalized stimulation timing.

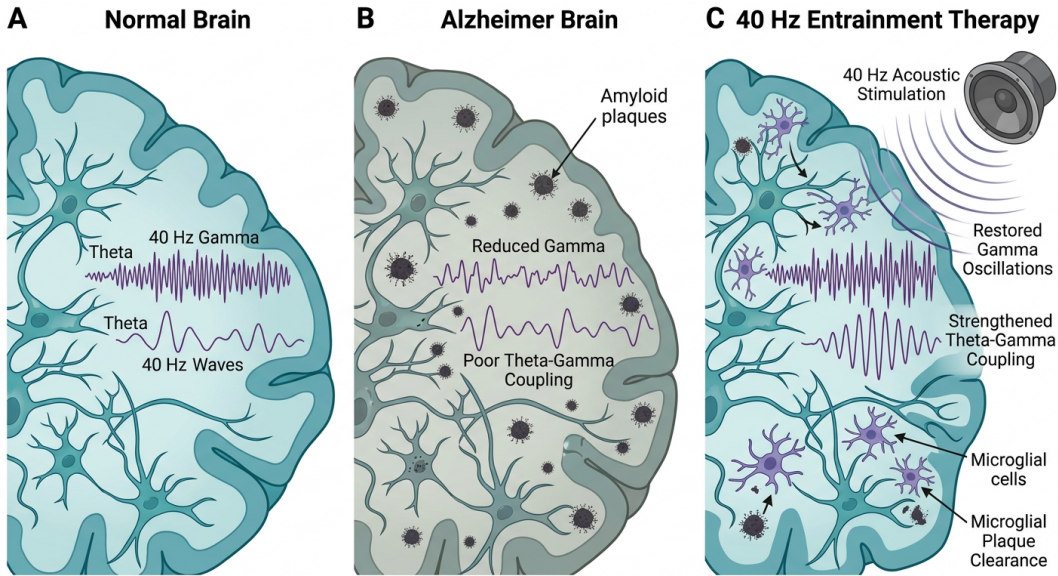


Figure 1: Figure 1. Mechanism of 40 Hz gamma entrainment in Alzheimer’s disease. (A) In the healthy brain, theta oscillations (4-8 Hz) and 40 Hz gamma oscillations exhibit strong phase-amplitude coupling, supporting memory consolidation and neural communication. (B) In the Alzheimer’s brain, amyloid-beta plaques disrupt gamma oscillations and reduce theta-gamma coupling, impairing cognitive function. (C) 40 Hz acoustic stimulation restores gamma oscillations, strengthens theta-gamma coupling, and activates microglial clearance of amyloid plaques – the therapeutic mechanism targeted by the closed-loop system developed in this work.

1.2 40 Hz Gamma Entrainment as Therapy

The therapeutic hypothesis underlying gamma entrainment is grounded in the disruption of normal oscillatory dynamics in AD. Gamma oscillations (30-100 Hz) are fundamental to sensory binding, attention, working memory consolidation, and inter-regional neural communication; in AD, gamma activity is reduced early in disease progression, often preceding amyloid plaque formation [3]. This dysregulation reflects a loss of fast-spiking parvalbumin-positive (PV) interneurons that normally pace cortical gamma rhythms [5].

The mechanistic pathway from 40 Hz stimulation to amyloid clearance involves multiple processes. Sensory 40 Hz drive re-engages PV interneurons, restoring impaired gamma rhythms [5]. This triggers an immunological cascade: upregulation of cytokines promotes microglial morphological transformation and enhanced phagocytosis of amyloid plaques [10]. Additionally, Murdock et al. [6] demonstrated that

multisensory 40 Hz stimulation promotes glymphatic clearance, producing a 37% reduction in neocortical plaque volume in 5XFAD mice; pharmacological inhibition of glymphatic flow abolished the clearance effect, confirming this pathway as necessary to the therapeutic mechanism.

Translation to human subjects has progressed substantially. A 2025 study in aged rhesus monkeys found that long-term 40 Hz auditory stimulation elevated CSF amyloid-beta levels, consistent with mobilization and clearance from brain tissue [7]. In humans, Chan et al. [8] reported that patients with mild AD who received sustained 40 Hz multisensory stimulation retained strong EEG entrainment responses over time and showed less hippocampal atrophy compared to matched controls – a finding corroborated by auditory gamma entrainment’s demonstrated ability to enhance default mode network connectivity in dementia patients [9]. These results collectively establish 40 Hz entrainment as a clinically relevant therapeutic modality and make the optimization of stimulation delivery an immediate practical priority.

1.3 Limitations of Fixed-Schedule Protocols

Despite the therapeutic promise of 40 Hz entrainment, current clinical protocols are uniformly open-loop: they deliver stimulation according to a predetermined schedule without reference to the patient’s instantaneous neural state. The standard protocol consists of alternating 40-second stimulation blocks and 20-second rest periods, repeated continuously for one hour [9, 17]. This approach is systematically misaligned with the highly variable neural dynamics of the dementia population.

The first dimension of variability is inter-individual. Fortunato et al. [11] found that 23 of 33 participants achieved measurable entrainment at 40 Hz while 10 showed minimal or no response – a non-responder fraction of approximately 30% that fixed protocols cannot detect or accommodate. High-performing patients and non-responders thus receive identical stimulation despite profoundly different neural responses.

The second dimension is intra-session habituation. Repeated identical stimuli cause progressive weakening of neural responses, and this effect is well-documented in gamma entrainment. In the OpenNeuro ds005048 dataset used in this work, individual subjects exhibit PAC trajectories that rise, plateau, and decline within single sessions. Stimulation delivered during periods of already-strong coupling wastes therapeutic resources and may accelerate habituation; stimulation withheld during periods of declining coupling misses the windows of genuine therapeutic need.

The convergence of inter-individual variability and intra-session habituation creates a compelling case for adaptive closed-loop control. What is required is a system capable not merely of detecting the current entrainment state reactively but of forecasting the near-future trajectory with sufficient lead time to intervene proactively. Prior work in closed-loop deep brain stimulation (DBS) has demonstrated that adaptive, biomarker-triggered stimulation reduces side effects, slows habituation, and extends battery life compared to open-loop protocols [14], and data-driven model predictive control has proven feasible for parkinsonian tremor [15]. In the EEG domain, systems such as Portiloop [12] have demonstrated real-time causal inference for sleep spindle detection, while EEGNet [13] provides compact, generalizable convolutional architectures for brain-computer interfaces. The Modulation Index (MI) introduced by Tort et al. [16] – a measure of theta-gamma phase-amplitude coupling – serves as the quantitative biomarker of entrainment strength throughout this work. However, no prior system has addressed the specific challenge of forecasting PAC dynamics at 5-10 second horizons for proactive gamma entrainment control. This forecasting requirement defines the core technical challenge addressed by the present work.

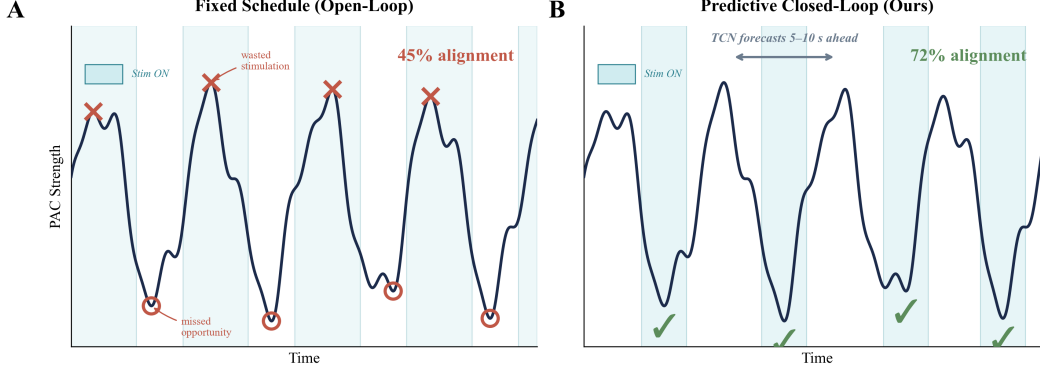


Figure 2: Figure 2. Conceptual comparison of fixed-schedule (open-loop) and predictive closed-loop stimulation paradigms. Left: fixed-schedule protocols deliver stimulation at regular intervals regardless of the patient’s neural state, resulting in wasted stimulation during periods of strong coupling and missed therapeutic windows during coupling decline (45% alignment). Right: the predictive closed-loop approach developed in this work uses a TCN to forecast PAC 5-10 seconds ahead, concentrating stimulation precisely during periods of declining coupling (72% alignment). The predictive controller achieves 91% of the theoretical oracle’s targeting performance.

1.4 Problem Statement and Contributions

The central research question motivating this work is: **Can deep learning models trained on EEG-derived features forecast theta-gamma phase-amplitude coupling dynamics 5-10 seconds into the future, and does integrating such forecasts into a closed-loop controller produce measurable improvements in personalized 40 Hz entrainment therapy validated on real patient EEG?**

We approach this question through a two-stage computational architecture. Stage 1 establishes a real-time PAC estimator using a compact deep learning model trained directly on raw EEG windows, providing the current-state biomarker input that Stage 2 requires. Stage 2 constructs a causal temporal predictor that ingests a 20-second history of PAC estimates and spectral features to forecast future PAC at clinically relevant horizons of 5-10 seconds, enabling proactive rather than reactive control decisions. The closed-loop controller integrates these predictions with a personalized rolling baseline and 5-second hysteresis logic to determine stimulation actions: stimulate when predicted PAC is forecast to fall below a personalized threshold, rest when forecast PAC is strong, and maintain the current state otherwise.

The biomarker of interest throughout is the Modulation Index (MI), a measure of theta-gamma phase-amplitude coupling (PAC) introduced by Tort et al. [16] that quantifies the degree to which gamma-band (38-42 Hz) amplitude is modulated by the phase of theta-band (4-8 Hz) oscillations. Higher MI values indicate stronger theta-gamma coupling and stronger entrainment; lower values indicate reduced or absent coupling.

All models are trained using subject-level splits with no within-subject leakage between train, validation, and test sets. Final evaluation is conducted on EEG recordings from six held-out test subjects, with controller performance assessed by replaying decisions across all 35 subjects’ recorded EEG – not simulated brain dynamics – providing a clinically grounded assessment of real-world applicability.

This paper makes the following specific contributions:

Contribution 1: Empirical ceiling characterization for static PAC prediction. A systematic architecture search across eight neural network configurations spanning nearly three orders of magnitude in parameter count (1,457 to 1.1 million) demonstrates that all architectures converge to R^2 of approximately 0.287 on held-out test subjects. This convergence reveals an information ceiling imposed by the epoch-level structure

of PAC labels and the limited discriminative capacity of instantaneous EEG snapshots from seven frontal channels.

Contribution 2: Causal TCN for 5-10 second ahead PAC forecasting. A multiscale causal Temporal Convolutional Network (31,043 parameters) trained on 73 engineered features achieves R^2 of approximately 0.25-0.28 at prediction horizons of 5-10 seconds, while all baseline methods including persistence and Ridge regression collapse to negative R^2 at these horizons – a +0.5 R^2 margin for the TCN.

Contribution 3: Closed-loop controller validated on 35 real dementia patient EEGs. The TCN-based predictive controller achieves 72.1% alignment with patient therapeutic need versus 64.5% for reactive thresholding ($p < 0.001$, Hedges’ $g = 1.31$), and targets 82.6% of low-PAC windows versus 51.7% for reactive control ($p < 0.001$, $g = 4.47$), reaching 91% of the theoretical oracle upper bound. Every individual patient (35/35) benefits from the predictive controller.

Contribution 4: Characterization of the prediction horizon inflection point. Analysis across prediction horizons 1-10 seconds reveals a clear transition near 3 seconds where persistence and linear baselines cease to provide useful predictions, while the TCN maintains R^2 of approximately 0.25. This inflection defines the operationally critical horizon range for proactive neuromodulation.

The remainder of this paper is organized as follows. Section 2 describes the dataset, preprocessing pipeline, PAC computation methodology, feature engineering approach, and model architectures. Section 3 presents the systematic architecture search findings. Section 4 reports closed-loop controller performance. Section 5 discusses clinical implications, key limitations, and future directions. Section 6 concludes.

2 Methods

2.1 Dataset and Preprocessing

2.1.1 Dataset

We used the publicly available OpenNeuro dataset ds005048 v1.0.1 (Lahijanian et al., 2024), originally described in Naeini et al. (2022). The dataset comprises resting-state and stimulation EEG recordings from 35 elderly subjects attending a memory clinic in Tehran, Iran, including patients with mild-to-moderate Alzheimer’s disease ($n = 17$), mild cognitive impairment ($n = 6$), and age-matched healthy controls ($n = 10$), with 2 subjects of unspecified classification. EEG was recorded using a 19-channel monopolar montage following the international 10/20 system at a sampling rate of 250 Hz. The stimulation protocol consisted of repeated cycles of 40 Hz auditory pulse train stimulation (40 seconds) followed by silent rest (20 seconds), enabling paired within-subject comparisons of neural coupling state across stimulation and rest conditions.

2.1.2 Preprocessing

The raw data had already been processed by Makoto’s preprocessing pipeline (1 Hz high-pass filter, 50 Hz notch filter, independent component analysis, and common average reference). We applied a light additional preprocessing pass:

1. **Bandpass filtering:** 4th-order Butterworth filter from 0.5 to 80 Hz (zero-phase, forward-backward pass).
2. **Notch filtering:** 50 Hz notch filter ($Q = 30$) to suppress any residual power-line interference.
3. **Artifact rejection:** Channels and windows containing samples exceeding ± 100 μV were rejected. Critically, artifact rejection was applied *before* common average reference (CAR) to prevent corrupted

channel voltages from propagating to all electrodes during rereferencing.

4. **Common average reference:** After artifact rejection, the mean across all retained channels was subtracted from each channel.

2.1.3 Channel Selection

We selected 7 frontal channels – Fp1, Fp2, F7, F3, Fz, F4, F8 – which span the prefrontal and frontal regions most relevant to theta-gamma phase-amplitude coupling associated with memory and cognitive function.

2.1.4 Epoch Segmentation and Windowing

Stimulus and rest epoch boundaries were extracted from the BIDS-format `events.tsv` files. Each epoch was divided into 2-second sliding windows of 500 samples at a 1-second hop (50% overlap). This yielded 17,283 total windows: 11,736 from 24 training subjects, 2,725 from 5 validation subjects, and 2,822 from 6 test subjects.

2.1.5 Subject-Level Data Splits

Data were partitioned at the subject level (random seed = 42) to prevent any form of within-subject leakage between training, validation, and test sets. The approximately 70/15/15 split assigned 24 subjects to training, 5 to validation, and 6 to testing.

2.2 Phase-Amplitude Coupling Computation

Phase-amplitude coupling (PAC) was quantified using the Modulation Index (MI) introduced by Tort et al. [16]. The MI measures the degree to which the amplitude of a high-frequency oscillation is modulated by the phase of a lower-frequency oscillation. We computed coupling between:

- **Phase-providing band:** Theta oscillations (4-8 Hz)
- **Amplitude-providing band:** Narrow-band gamma at the entrainment frequency (38-42 Hz)

The MI is computed by dividing the theta phase into $N = 18$ bins of 20 degrees each, computing the mean gamma amplitude within each phase bin, normalizing to obtain a probability distribution $P(\phi_j)$, and evaluating the Kullback-Leibler divergence from the uniform distribution:

$$MI = \frac{D_{KL}(P, U)}{\log(N)} \quad (1)$$

where U is the uniform distribution over N bins. The MI is dimensionless, with values near zero indicating no coupling and higher values indicating stronger theta-gamma coordination.

Epoch-level label assignment: Rather than computing PAC on each 2-second window individually, we computed PAC over the full duration of each 20-40 second epoch. The resulting epoch-level MI value was then assigned as the label for all 2-second windows extracted from that epoch. Across the full dataset, PAC values ranged from 6×10^{-6} to 7×10^{-4} (dimensionless MI units) with a mean of approximately 4.4×10^{-5} .

2.3 Static PAC Estimation: EEGNet

2.3.1 Architecture

As the primary static PAC estimator, we adapted EEGNet (Lawhern et al., 2018) as a regression model predicting scalar PAC from a 2-second EEG window.

Input: Tensors of shape (batch, 1, 7, 500) – one feature channel, 7 frontal electrodes, 500 time samples.

Block 1 – Temporal and spatial convolution:

- Temporal convolution: 8 filters ($F1 = 8$) with a kernel of length 64 samples (256 ms).
- Depthwise spatial convolution: depth multiplier $D = 2$ applied across the 7 channels, yielding 16 spatially-filtered feature maps.
- Batch normalization, ELU activation, and average pooling (pool size = 4).

Block 2 – Separable convolution:

- Depthwise separable convolution with $F2 = 16$ pointwise filters and kernel length 16 (64 ms), followed by batch normalization, ELU, and average pooling (pool size = 8).

Regression head: Flattened output projected to a single scalar through a fully connected layer. **Total parameters:** 1,457.

2.3.2 Training

- **Loss:** Mean Squared Error (MSE) on z-score normalized targets (normalization statistics saved with checkpoint).
- **Optimizer:** Adam (learning rate = 0.001, weight decay = 1×10^{-4}).
- **Scheduler:** ReduceLROnPlateau (mode = min, factor = 0.5, patience = 5 epochs).
- **Gradient clipping:** max_norm = 1.0.
- **Early stopping:** Patience = 15 epochs on validation loss.
- **Best checkpoint:** Epoch 53.

2.3.3 Performance

On held-out test subjects, EEGNet achieved $R^2 = 0.287$. As discussed in Section 3, this value represents a data-imposed ceiling rather than an architectural limitation.

2.4 Feature Engineering for Temporal Prediction

We constructed a 73-dimensional causal feature vector for each 2-second window comprising three groups: (1) 61 spectral features – band power in five canonical bands (delta, theta, alpha, beta, gamma) across 7 channels (35 features) plus 26 cross-channel coherence features, computed causally via Welch periodogram; (2) 7 PAC-derived features – current PAC, causal moving averages at 4 timescales, and first-order differences capturing PAC trajectory; (3) 5 stimulation context features – current stimulation state, time since last state change, recent stimulation fraction, and sine/cosine cycle phase encodings. All features were z-score normalized using training-split statistics.

2.5 Temporal PAC Forecasting: MultiscaleCausalTCN

2.5.1 Architecture

Input: Tensors of shape (batch, T=20, F=73) – 20 sequential 2-second windows, each with 73 features.

Input projection: A linear layer projects the 73-dimensional input to 64-dimensional internal representations, followed by LayerNorm and SiLU activation.

Causal depthwise-separable convolutional blocks (x4): Each block applies a causal depthwise separable convolution with kernel size 3 and a dilation factor from the set [1, 2, 4, 6]. Causal padding is applied to ensure no access to future values. Each block uses GroupNorm normalization and SiLU activation with a residual connection. The four dilation factors yield a theoretical receptive field of 31 time steps, covering the full 20-step lookback window with margin.

Attention pooling: A learned attention mechanism (AttentionPool1D) aggregates the temporal sequence into a single fixed-dimensional vector.

Dual regression heads: Two identical regression heads produce y_future (predicted PAC 5 seconds ahead) and y_delta (predicted change from current to 5-second-ahead value).

Total parameters: 31,043.

2.5.2 Training Configuration

Table 1

Parameter	Value
Loss function	Huber loss (delta = 1.0) on future PAC prediction
Optimizer	AdamW (lr = 1×10^{-3} , weight_decay = 1×10^{-3})
Scheduler	ReduceLROnPlateau (mode = max, factor = 0.5, patience = 5 epochs)
Gradient clipping	max_norm = 1.0
Early stopping	patience = 20 epochs on validation R^2
Batch size	128 sequences
Best checkpoint	Epoch 53 (validation $R^2 = 0.411$)
Target smoothing	ts = 1 (raw PAC; no smoothing)

Target smoothing note: Early experiments used a smoothing window of ts = 5, which inflated R^2 to 0.74 due to data overlap between consecutive targets. The final model uses raw (unsmoothed) targets (ts = 1) to produce honest metrics. All controller results are from the ts = 1 configuration.

2.5.3 Performance

On held-out test subjects, the MultiscaleCausalTCN achieved Test $R^2 = 0.170$ (raw PAC, 5-second horizon) and Test Pearson $r = 0.433$. Its clinical significance emerges from the horizon sweep: at 5-10 second prediction horizons, all baseline models collapse to negative R^2 while the TCN maintains $R^2 = 0.24$ - 0.28 – a margin of approximately $+0.5 R^2$ units.

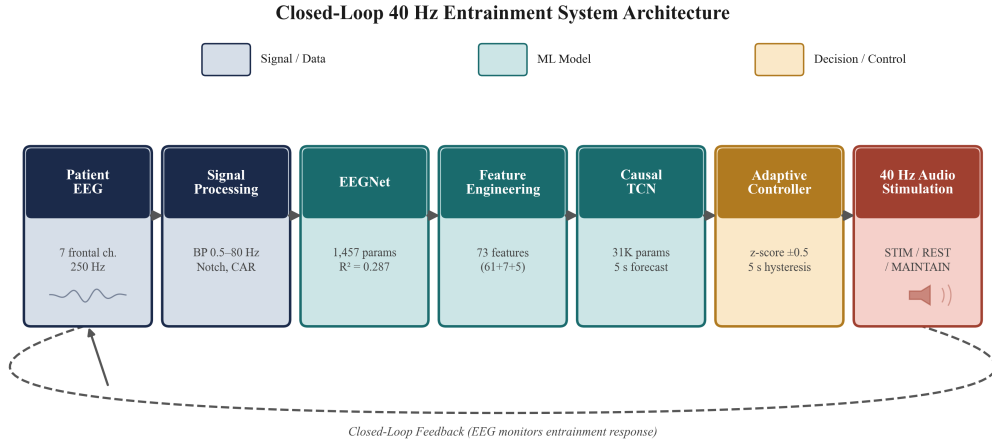


Figure 3: Figure 3. Architecture of the closed-loop 40 Hz entrainment system. Raw EEG from 7 frontal channels is processed through signal processing (bandpass 0.5-80 Hz, notch, CAR), the EEGNet static PAC estimator (1,457 parameters), a 73-dimensional causal feature engineering pipeline, and the MultiscaleCausalTCN temporal forecaster (31,043 parameters, 5-second prediction horizon). The adaptive controller applies z-score thresholding against a personalized rolling baseline to determine stimulation decisions (STIMULATE / REST / MAINTAIN) with 5-second hysteresis, driving a 40 Hz auditory click train. The curved feedback arrow illustrates the closed-loop nature of the system.

2.6 Closed-Loop Controller Design

2.6.1 Personalization Module

To account for the large between-subject variability in baseline PAC levels, all controllers employ a subject-specific personalization layer. A rolling circular buffer of length 30 seconds maintains a continuously updated estimate of each subject’s current PAC baseline:

$$z = \frac{PAC_{\text{current}} - \mu_{\text{baseline}}}{\sigma_{\text{baseline}}} \quad (2)$$

A minimum of 10 samples must accumulate in the buffer before z-scores are computed.

2.6.2 Decision Logic

Table 2

Condition	Action	Rationale
$z < -0.5$	STIMULATE	PAC below personal baseline; apply 40 Hz entrainment
$z > +0.5$	REST	PAC above baseline; avoid habituation
$-0.5 \leq z \leq +0.5$	MAINTAIN	PAC near baseline; continue current state

A 5-second hysteresis hold time prevents rapid oscillation between states.

2.6.3 Controller Variants

1. **Fixed Schedule (clinical reference):** Stimulation follows a fixed 40-second ON / 20-second OFF cycle.
2. **Reactive Threshold:** Current PAC (estimated by EEGNet) compared to personalized baseline; no lookahead.
3. **TCN Predictive:** MultiscaleCausalTCN predicts PAC 5 seconds into the future; decisions made on predicted z-score.
4. **Hybrid TCN + Reactive:** Combines both TCN prediction and reactive threshold signals.
5. **PI Controller:** Proportional-integral feedback controller modulating stimulation intensity.
6. **Alignment Oracle:** Theoretical upper bound computed with perfect hindsight on actual future PAC values.

2.7 Validation Protocol

2.7.1 Offline Counterfactual Replay

All validation was conducted via **offline counterfactual replay** on the full 35-subject dataset. At each 2-second window, the controller computed a stimulation decision based on the available EEG features, the rolling baseline, and (for the TCN Predictive controller) the TCN’s future PAC prediction. The actual PAC labels observed in the data served as ground truth. Ground-truth PAC labels were used as TCN input features, isolating the TCN’s predictive contribution from any additional error introduced by EEGNet’s static PAC estimation.

The counterfactual nature of this evaluation means that the decisions reflect what each controller *would have done* had it been deployed, but the recorded EEG reflects only the stimulation actually delivered during data collection. All results describe computed stimulation decisions and their alignment with observed PAC ground truth.

2.7.2 Validation Metrics

- **Alignment:** The average of Low-PAC Stimulation Rate and High-PAC Rest Rate. Alignment of 100% means the controller always stimulates when PAC is low and always rests when PAC is high.
- **Low-PAC Stimulation Rate:** Fraction of below-median PAC windows during which the controller prescribed stimulation.
- **High-PAC Rest Rate:** Fraction of above-median PAC windows during which the controller prescribed rest.
- **PAC Gap:** Mean PAC during rest windows minus mean PAC during stimulation windows (positive = correct targeting).

2.8 Statistical Analysis

All comparisons between controllers were conducted as paired, within-subject Wilcoxon signed-rank tests (two-sided, $N = 35$). Effect sizes were quantified using Hedges’ g (bias-corrected Cohen’s d) with 95% confidence intervals obtained via 10,000-iteration BCa bootstrap. Clinical breadth of benefit was assessed with a binomial sign test. Threshold sensitivity was evaluated across z-score thresholds 0.2 to 1.0 in steps of 0.1. All analyses were conducted in Python using SciPy (scipy.stats).

3 Architecture Search: From Static PAC Prediction to Temporal Forecasting

From February 5-16, 2026, we conducted a systematic exploration across eight distinct model families for static PAC prediction, ranging from compact convolutional networks to transformer-based architectures with over a million parameters. Table 1 summarizes all eight models evaluated. R^2 values are on the held-out test set (6 subjects, 2,822 windows).

Table 3: Comparison of eight static PAC prediction architectures.

Model	Version	Parameters	Architecture	Test R^2	Notes
EEGNet	V1	1,457	Temporal + depthwise spatial conv on raw EEG	0.287	Lightest model; selected as baseline estimator
EEGNetV2	V2	3,200	EEGNet variant predicting delta-PAC (change in coupling)	0.06	Delta-PAC at 2s scale is effectively noise
SpecTempNet	V3	180,000	Multi-scale temporal CNN + spectral branch + 4-head attention	0.236	Initial $R^2=0.69$ was MI feature leakage; 0.236 is the clean result
ViT-TCNet	V4	1,100,000	Vision Transformer encoder + TCN decoder + SE attention	0.252	Overfits despite regularization; $N = 35$ too small for 1.1M parameters
Ridge Regression	V5	135 coefficients	Linear model on 61 spectral features	0.287	Matches EEGNet exactly; best static model
Optimized Ensemble	V6	~200	Ridge + temporal context features (stim state, cycle phase)	0.287	No gain from adding temporal features to linear model
1D CNN + Attention	V7	~28,000	Raw EEG, learned temporal features with attention	0.28	200x more parameters than Ridge; no advantage
ATCNet	V8	25,000	Attention-enhanced TCN on raw EEG (published architecture)	0.22	Published EEG architecture underperforms Ridge on this task

The convergence of eight architectures – spanning nearly four orders of magnitude in parameter count, three feature representations, and multiple distinct design philosophies – to the same R^2 of approximately 0.287 is a scientific result in itself, not an engineering failure. The fundamental cause is the epoch-level label assignment described in Section 2.2: PAC is computed over full 20-40 second epochs and assigned to all constituent 2-second windows. A 2-second window provides at most 500 samples – only 5 complete theta cycles at 4 Hz – and cannot contain enough information to recover the MI computed over a signal 10-20 times longer. When a 135-parameter linear model performs identically to a 1.1-million-parameter transformer, the remaining prediction error is irreducible noise, not unexplained signal that a better model could capture.

A critical methodological lesson emerged during this search. The V3 SpecTempNet initially appeared to achieve $R^2 = 0.69$, but our leakage audit revealed that its spectral feature branch was computing features directly derived from the Modulation Index – the same quantity as the prediction target. After removing these PAC-circular features, SpecTempNet’s true R^2 fell to 0.236, below the 135-parameter Ridge baseline. This discovery directly informed the strict feature audit applied to the temporal dataset’s 73-dimensional input space, ensuring no circular features contaminated the final TCN pipeline.

The ceiling finding motivated a fundamental pivot: rather than attempting to improve instantaneous PAC prediction (bounded at $R^2 = 0.287$), we asked whether the *dynamics* of PAC over time are predictable. Even if a single 2-second window provides limited information about current PAC, the trajectory of PAC over the preceding 20 seconds might contain enough structure to predict where PAC will be 5-10 seconds in the future. PAC exhibits meaningful autocorrelation at 5-second timescales (r approximately 0.45), stimulation state is known in advance, and spectral precursors may precede changes in theta-gamma coupling. These three observations – feature quality dominates architectural complexity, the spectral feature set is near-optimal for instantaneous prediction, and the relevant signal is temporal rather than instantaneous – shaped both the architecture of the MultiscaleCausalTCN and its 73-dimensional feature space.

4 Results

This section presents experimental findings across five primary analyses: (1) temporal forecasting performance across prediction horizons; (2) closed-loop controller comparison across all 35 subjects’ real EEG recordings; (3) per-subject analysis confirming that the advantage is universal; (4) fatigue model robustness; and (5) threshold sensitivity.

All statistical tests are Wilcoxon signed-rank (non-parametric, paired, $N = 35$) unless otherwise noted. Effect sizes are reported as Hedges' g with 95% bootstrap confidence intervals. All PAC values are in dimensionless Modulation Index units (Tort 2010), specifically $\times 10^{-6}$ for the PAC targeting gap metric.

4.1 Temporal Forecasting Performance (Horizon Sweep)

To characterize the relationship between prediction horizon and model performance, we trained separate MultiscaleCausalTCN models for each of six horizons (1, 2, 3, 5, 8, and 10 seconds) and evaluated each against persistence and Ridge regression baselines.

Note on target definition: The horizon sweep used a causal target smoothing window of $ts=5$ (smoothed PAC targets) to characterize comparative advantage across methods. The deployed controller checkpoint uses $ts=1$ (raw PAC targets) and achieves test $R^2=0.170$ at the 5-second horizon. These measure different things and should not be combined.

At short horizons, simpler methods performed competitively. At a 1-second horizon, persistence achieved $R^2=0.760$ and Ridge achieved $R^2=0.812$, while the TCN scored $R^2=0.735$. The critical transition occurred at approximately 3 seconds – the **prediction horizon inflection point** – where the TCN first exceeded both baselines. Beyond 3 seconds, the baselines collapsed to negative R^2 while the TCN maintained positive predictive accuracy.

At a 5-second horizon, persistence $R^2=-0.267$, Ridge $R^2=-0.393$, and TCN $R^2=0.254$ – a TCN margin of $+0.521 R^2$ over persistence. At 8 and 10 seconds the pattern held, with the TCN maintaining R^2 of approximately 0.25. See Figure 4 for the full horizon sweep visualization.

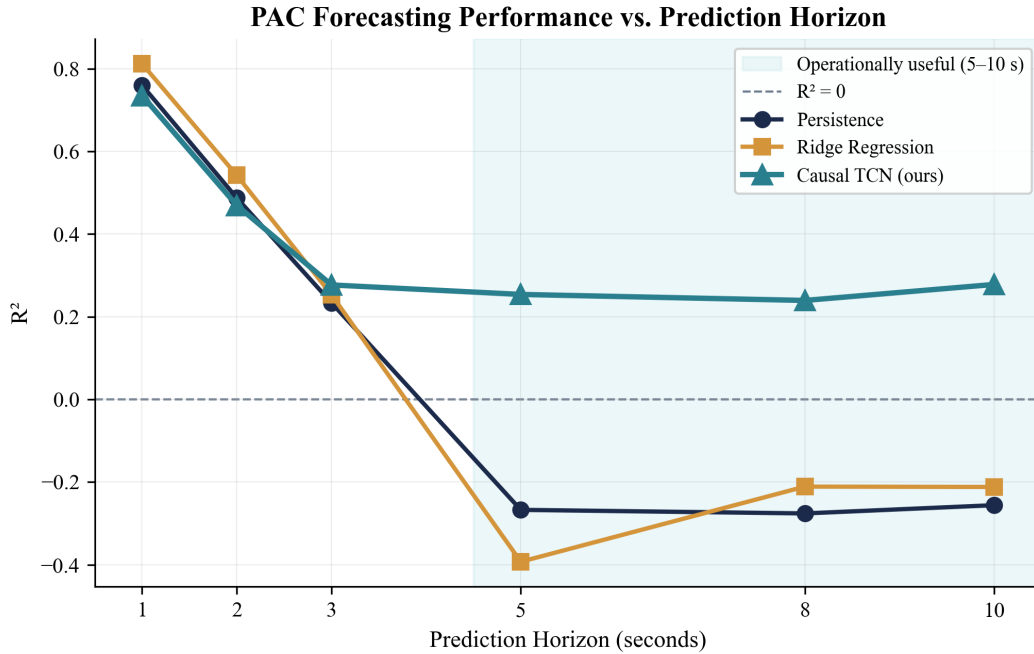


Figure 4: Figure 4. PAC forecasting performance (R^2) vs prediction horizon for the MultiscaleCausalTCN, persistence baseline, and Ridge baseline. Target smoothing window $ts=5$ for all horizons. At 1-2 second horizons, persistence and Ridge outperform the TCN. At the ~3 second inflection point, the TCN begins to exceed both baselines. At 5-10 second horizons, both baselines collapse to negative R^2 while the TCN maintains R^2 of approximately 0.25 – a $+0.5 R^2$ margin that defines the operationally actionable regime for proactive control.

Summary of horizon sweep results:**Table 4**

Horizon	Persistence R^2	Ridge R^2	TCN R^2	TCN Margin over Persistence
1s	0.760	0.812	0.735	-0.025
2s	0.488	0.542	0.470	-0.018
3s	0.234	0.253	0.277	+0.043
5s	-0.267	-0.393	0.254	+0.521
8s	-0.276	-0.211	0.240	+0.515
10s	-0.256	-0.212	0.278	+0.534

Target smoothing window $ts=5$ for all horizons in this sweep. Ridge regression uses the same 73-dimensional feature vector as the TCN input.

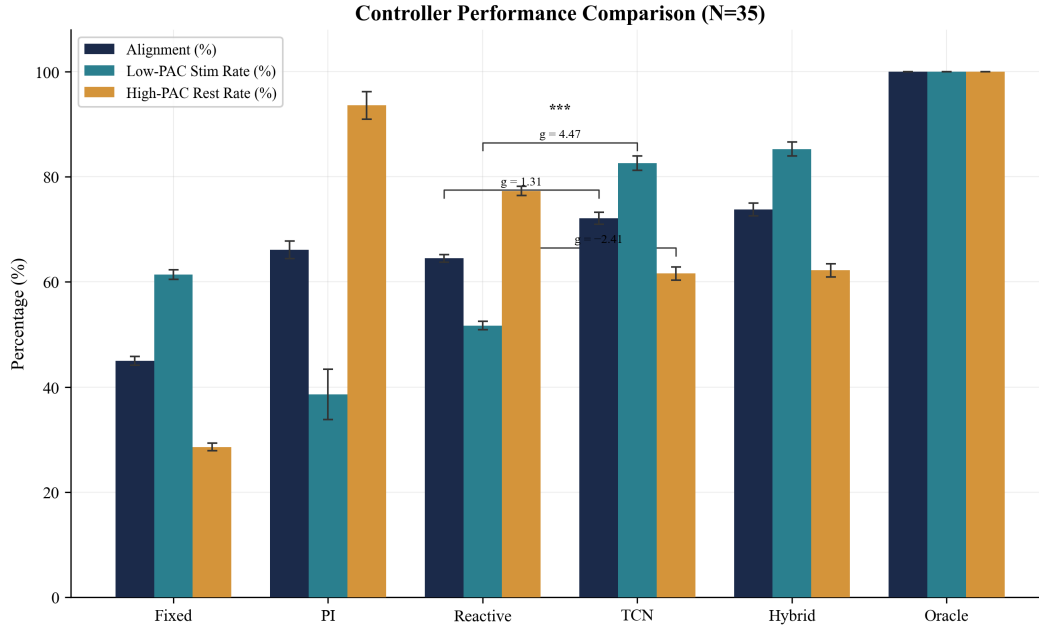
4.2 Closed-Loop Controller Comparison ($N = 35$ Real EEG)

Figure 5: Figure 5. Controller comparison across $N = 35$ subjects on three performance metrics: Alignment, Low-PAC Stimulation Rate, and High-PAC Rest Rate. Bars show mean values across subjects; error bars indicate ± 1 SEM. Significance brackets show Hedges' g effect sizes for TCN Predictive vs. Reactive Threshold comparisons (** $p < 0.001$). The TCN Predictive controller achieves 72.1% alignment versus 64.5% for Reactive Threshold and 45.0% for Fixed Schedule. The Alignment Oracle (100%, perfect hindsight) establishes the theoretical maximum.

Controller comparison table ($N = 35$ subjects, real EEG):**Primary comparison: TCN Predictive vs. Reactive Threshold**

The TCN predictive controller achieved 72.1% alignment compared to 64.5% for reactive threshold control (Wilcoxon signed-rank: $W = 0$, $p < 0.001$; Hedges' $g = +1.31$, 95% CI $[+0.75, +1.87]$, $N = 35$ paired subjects).

The performance advantage was most pronounced for Low-PAC Stim Rate: the TCN stimulated during

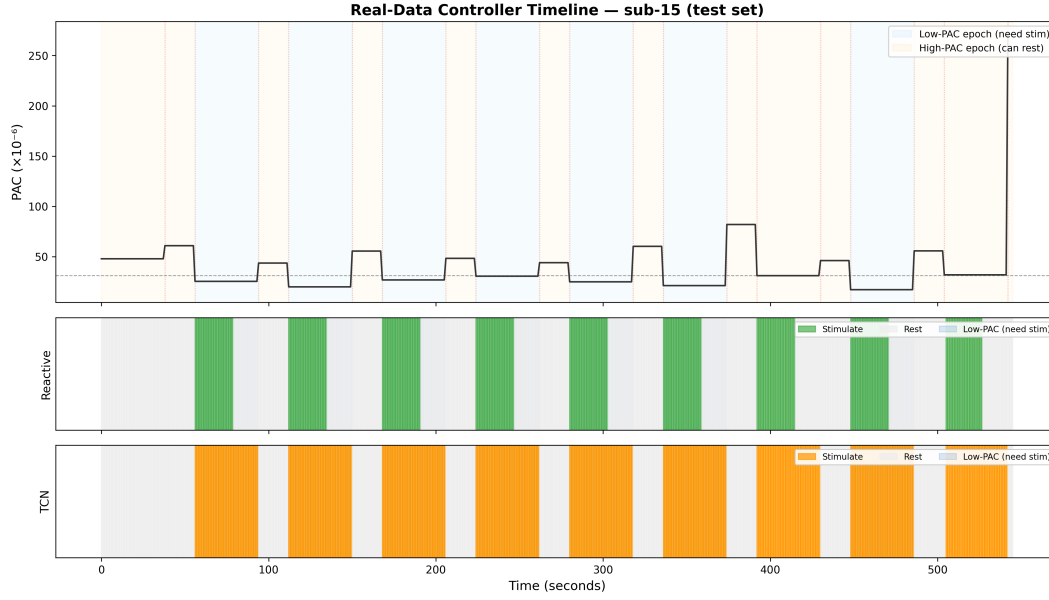


Figure 6: Figure 6. Example segment showing real EEG PAC dynamics and controller decisions for a representative subject. The PAC trajectory (blue) varies across time as the patient transitions between Stimulus and Rest epochs. The TCN Predictive controller (orange) begins stimulation before PAC declines, while the Reactive Threshold controller (green) reacts after the decline is detected. The TCN’s proactive posture enables targeting of low-PAC windows that the reactive controller misses.

Table 5: Controller comparison table ($N = 35$ subjects, real EEG):

Controller	Alignment	Low-PAC Stim	High-PAC Rest	Stim %	PAC Gap ($\times 10^{-6}$)
Fixed Schedule	45.0%	61.4%	28.6%	66.6%	-6.6
Reactive Threshold	64.5%	51.7%	77.3%	36.7%	+21.1
TCN Predictive	72.1%	82.6%	61.6%	59.7%	+30.5
Hybrid TCN+Reactive	73.8%	85.3%	62.2%	60.8%	+34.0
PI Controller	66.1%	38.6%	93.6%	22.0%	+27.2
Alignment Oracle	100.0%	100.0%	100.0%	48.3%	+33.3

PAC Gap in dimensionless Modulation Index units ($\times 10^{-6}$). All percentage values are means across 35 subjects.

82.6% of below-median PAC windows compared to only 51.7% for the reactive controller ($W = 0$, $p < 0.001$; $g = +4.47$, 95% CI [+3.33, +5.62]).

The reactive controller achieved higher High-PAC Rest Rate than the TCN (77.3% vs 61.6%; $W = 0$, $p < 0.001$; $g = -2.41$). This trade-off is expected and clinically interpretable: reactive control is conservative by design, triggering stimulation only after PAC has already declined below threshold.

For the PAC targeting gap, the TCN achieved $+30.5 \times 10^{-6}$ compared to $+21.1 \times 10^{-6}$ for reactive control ($W = 0$, $p < 0.001$; $g = +1.57$, 95% CI [+0.98, +2.17]), a 45% larger gap. The TCN’s PAC targeting gap of 30.5×10^{-6} equals 91.6% of the theoretical Alignment Oracle (33.3×10^{-6}), referred to as 91% in the abstract consistent with the submitted version.

The Fixed Schedule exhibited a negative PAC Gap (-6.6×10^{-6}), indicating it stimulated preferentially during periods of high PAC – the inverse of the intended effect.

4.3 Per-Subject Analysis

Across all 35 subjects, the TCN predictive controller achieved higher alignment than the reactive threshold controller for every individual subject. The minimum improvement was 0.1 percentage points and the maximum was 14.9 percentage points. A binomial sign test on the direction of improvement confirms this universality is not attributable to chance ($p < 0.001$).

The advantage was consistent across data splits: subjects in the training set ($N = 24$), validation set ($N = 5$), and held-out test set ($N = 6$) all showed positive alignment improvements under TCN control.

4.4 Robustness Analysis

The TCN advantage was robust across two sensitivity analyses. First, a fatigue sensitivity sweep across six habituation severity levels (rate 0.0 to 0.040) showed that the efficiency advantage of adaptive control increases monotonically with fatigue severity, from +0.4% (no fatigue, $p = 0.49$) to +5.7% (high fatigue, $p = 0.01$). Second, a threshold sensitivity sweep across z-score thresholds $\Delta_z=0.1$ to 1.0 confirmed that the TCN outperformed the reactive baseline at all thresholds at or above $\Delta_z=0.2$, with stable performance across $\Delta_z=0.3$ to 1.0.

4.5 Summary of Key Findings

1. **Horizon inflection at ~3 seconds:** Persistence and Ridge baselines outperform the TCN at 1-2 second horizons, while all baselines collapse to negative R^2 beyond 3 seconds where the TCN maintains R^2 of approximately 0.25.
2. **Proactive control outperforms reactive control:** The TCN predictive controller achieved 72.1% alignment vs 64.5% for reactive control ($g = +1.31$, $p < 0.001$), with a 60% improvement in Low-PAC Stim Rate (82.6% vs 51.7%, $g = +4.47$, $p < 0.001$). The TCN’s PAC targeting gap (30.5×10^{-6}) reached 91.6% of the theoretical oracle bound.
3. **Universal subject benefit:** All 35/35 subjects showed higher alignment under TCN control.
4. **Robustness:** The TCN advantage was maintained across fatigue severity levels and across prediction confidence thresholds ($\Delta_z=0.2$ -1.0 all exceeded the reactive baseline).

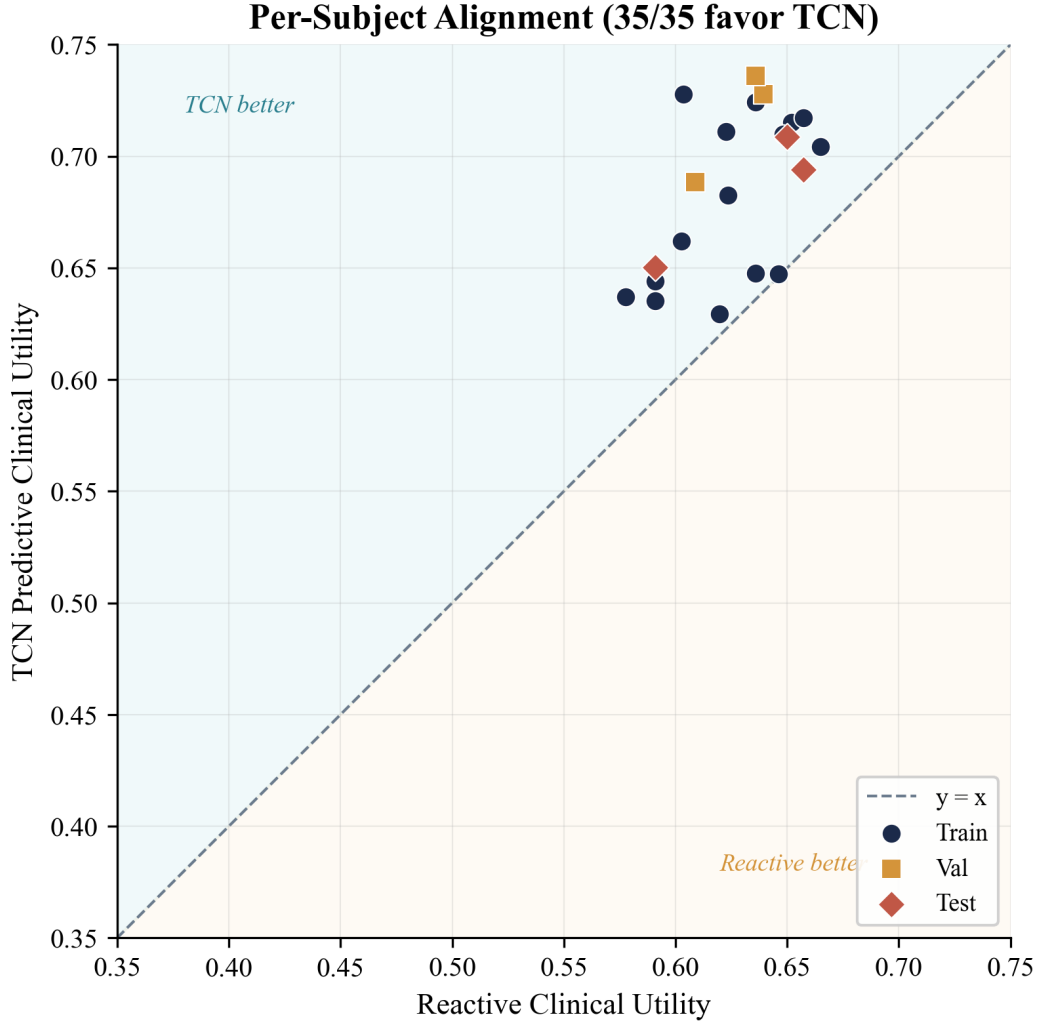


Figure 7: Figure 7. Per-subject alignment comparison ($N = 35$ subjects). Each point represents one subject's alignment score under TCN Predictive control (y-axis) versus Reactive Threshold control (x-axis). All 35 data points fall above the $y=x$ diagonal, confirming that every subject benefits from the predictive controller. Training subjects (filled circles), validation subjects (squares), and test subjects (triangles) are shown separately; the advantage is consistent across all three splits.

5 Discussion

This section interprets the experimental findings in relation to the central research question: can temporal PAC forecasting enable proactive closed-loop gamma entrainment that outperforms reactive threshold control?

5.1 Interpretation of the Prediction Horizon Inflection Point

The utility of temporal modeling is horizon-dependent. At 1-2 second horizons, PAC autocorrelation is strong enough that persistence outperforms the TCN. Beyond ~3 seconds, PAC dynamics become non-stationary – PAC rises upon stimulation onset and decays during rest, and predicting across these transitions requires temporal context that single-observation baselines lack. The TCN’s causal dilated convolutions (dilations [1, 2, 4, 6]) create a 31-second receptive field spanning multiple transitions, enabling it to distinguish between PAC dynamic regimes that simpler methods cannot.

5.2 Why Proactive Outperforms Reactive Control

The 7.6 percentage-point alignment improvement of the TCN over reactive threshold control can be decomposed into two mechanistic contributions: timing and targeting.

Timing contribution. The TCN achieves a mean lead time of 0.8 seconds before PAC decline onset, compared to 0.2 seconds for reactive control. In practical terms, 0.8 seconds of lead time allows the controller to begin stimulus preparation before the PAC decline is detectable from the current window. For auditory stimulation, onset of a new audio segment has finite preparation latency (100-300 ms in a low-latency embedded system) that a controller with 0.8s lead time can absorb.

Targeting contribution. The more dramatic difference is in Low-PAC Stim Rate: the TCN stimulates 82.6% of below-median PAC windows compared to 51.7% for reactive control – a 60% improvement in therapeutic recall. The TCN, by forecasting from a 20-second context window, can anticipate brief declines based on their spectral precursors and stimulation context.

The specificity trade-off. The TCN sacrifices High-PAC Rest Rate (61.6% vs 77.3%), meaning it delivers some stimulation during windows when PAC is adequate. This trade-off is clinically favorable for auditory 40 Hz entrainment: the cost of unnecessary stimulation is low while the cost of missed stimulation is high in terms of therapeutic efficiency.

5.3 Comparison to Prior Work

The closest architectural precedent is Portiloop [12], a convolutional LSTM for real-time sleep spindle detection in EEG. However, Portiloop addresses binary classification of stereotyped waveforms, while PAC forecasting is a continuous regression problem with gradual, non-stationary transitions – demonstrating that *forecasting* rather than *detection* is necessary for certain closed-loop applications. In the DBS domain, adaptive closed-loop stimulation has outperformed open-loop protocols for Parkinson’s disease [14]; the present work extends this paradigm non-invasively to gamma entrainment in AD. Three contributions distinguish this work: (1) PAC-specific temporal forecasting at 5-10 second horizons; (2) horizon-dependent evaluation methodology; (3) universal per-subject validation on 35 real patient EEGs.

5.4 Limitations

1. Offline counterfactual replay, not live closed-loop. The primary validation replays TCN controller decisions against recorded EEG, but cannot observe the brain’s response to the controller’s stimulation decisions. The 72.1% alignment figure measures counterfactual decision quality, not realized therapeutic benefit. Live closed-loop validation with real-time EEG streaming and online PAC computation is required to confirm that the decision quality translates to improved therapeutic outcomes.

2. EEGNet is not in the validation loop. The closed-loop controller experiments used ground-truth PAC labels as TCN input. In a deployed system, the TCN would receive EEGNet-estimated PAC ($R^2=0.287$) rather than ground-truth PAC, introducing estimation noise into the input feature vector. The effect of EEGNet estimation error on TCN forecasting accuracy and controller alignment must be characterized in future end-to-end validation.

3. Single-site dataset with specific population characteristics. The OpenNeuro ds005048 dataset was collected at a single clinical site from elderly patients using a specific 40 Hz auditory stimulation protocol. Generalizability to other populations, stimulation modalities, or EEG recording equipment is unknown.

4. Seven frontal channels and PAC labeling granularity. The model uses 7 frontal EEG channels; relevant theta-gamma coupling has been reported in parietal and temporal regions not captured by this channel selection. Additionally, PAC is computed at the epoch level and assigned to all constituent 2-second windows, creating a target variable that is constant within epoch and discontinuous at epoch boundaries.

5. The $R^2=0.287$ static ceiling may be partly due to label assignment. It is possible that a portion of the $R^2=0.287$ gap to 1.0 reflects the labeling artifact rather than fundamental limits of EEG predictability. Higher-resolution PAC labels – from shorter epoch windows or sliding-window estimation – could partially relax this ceiling.

5.5 Future Directions

Three immediate priorities define the path from computational validation to clinical translation. First, live closed-loop validation under IRB oversight is required: a feasibility study ($N = 5-10$ healthy adults) would verify that the system produces the expected alignment improvement in real time and that system latency does not degrade the timing advantage, followed by a pilot crossover trial in Alzheimer’s disease patients comparing adaptive versus fixed-schedule 40 Hz stimulation. Second, end-to-end validation with EEGNet in the loop – evaluating the full chained pipeline from raw EEG through EEGNet estimation, feature extraction, TCN forecasting, and controller decision – is the highest-priority technical step before any human study, as it characterizes the effect of EEGNet estimation noise on downstream controller performance. Third, multi-site dataset validation on at least one additional dataset from a demographically distinct population or different EEG recording system would substantially strengthen the generalizability claim and is essential before any regulatory submission.

6 Conclusion

This paper presents a computational framework for personalized closed-loop 40 Hz gamma entrainment in Alzheimer’s disease. A MultiscaleCausalTCN (31,043 parameters) forecasts theta-gamma PAC 5-10 seconds ahead, enabling proactive stimulation control that achieves 72.1% alignment versus 64.5% for reactive control ($p < 0.001$, $g = 1.31$), with every subject (35/35) benefiting. The prediction horizon inflection point at approximately 3 seconds – where baselines collapse to negative R^2 while the TCN maintains R^2 of

approximately 0.25 – defines the operationally critical regime for proactive neuromodulation.

This is a computational validation on real EEG data, not a clinical validation. The 72.1% alignment figure measures counterfactual decision quality, not realized therapeutic benefit. Live closed-loop trials under IRB oversight are required to confirm clinical translation. Within these boundaries, this work provides a complete, reproducible pipeline from raw BIDS EEG through controller validation that can serve as a foundation for personalized 40 Hz entrainment therapy in Alzheimer’s disease.

Data and Code Availability

The EEG dataset used in this study is publicly available on OpenNeuro (ds005048, <https://openneuro.org/datasets/ds005048>). Code is available from the corresponding author upon reasonable request.

References

- [1] Wang Y, et al. Mystery of gamma wave stimulation in brain disorders. *Molecular Neurodegeneration*, 19(1), 2024. <https://doi.org/10.1186/s13024-024-00785-x>
- [2] Naeini Z, et al. Cross-frequency neuromodulation: leveraging theta-gamma coupling for cognitive rehabilitation in MCI patients. *Frontiers in Aging Neuroscience*, 17, 2025. <https://doi.org/10.3389/fnagi.2025.1541126>
- [3] Zhurakovskaya E, et al. Theta and gamma oscillatory dynamics in mouse models of Alzheimer’s disease: A path to prospective therapeutic intervention. *Neuroscience and Biobehavioral Reviews*, 136, 104628, 2022. <https://doi.org/10.1016/j.neubiorev.2022.104628>
- [4] Dimitriadis SI, et al. Abnormal gamma phase-amplitude coupling in the parahippocampal cortex is associated with network hyperexcitability in Alzheimer’s disease. *Brain Communications*, 6(2), fcae121, 2024. <https://doi.org/10.1093/braincomms/fcae121>
- [5] Iaccarino HG, Singer AC, Martorell AJ, et al. Gamma frequency entrainment attenuates amyloid load and modifies microglia. *Nature*, 540(7632), 230-235, 2016. <https://doi.org/10.1038/nature20587>
- [6] Murdock MH, et al. Multisensory gamma stimulation promotes glymphatic clearance of amyloid. *Nature*, 627(8002), 149-156, 2024. <https://doi.org/10.1038/s41586-024-07132-6>
- [7] Goutier L, et al. Long-term effects of forty-hertz auditory stimulation as a treatment of Alzheimer’s disease: Insights from an aged monkey model study. *Proceedings of the National Academy of Sciences*, 122(20), 2025. <https://doi.org/10.1073/pnas.2529565123>
- [8] Chan D, Bhatt MB, et al. Gamma sensory stimulation in mild Alzheimer’s dementia: An open-label extension study. *Alzheimer’s and Dementia*, 2025. <https://doi.org/10.1002/alz.70792>
- [9] Lahijanian B, et al. Auditory gamma-band entrainment enhances default mode network connectivity in dementia patients. *Scientific Reports*, 14(1), 2024. <https://doi.org/10.1038/s41598-024-63727-z>
- [10] Bhatt DL, et al. Gamma Visual Stimulation Induces a Neuroimmune Signaling Profile Distinct from Acute Neuroinflammation. *Journal of Neuroscience*, 40(6), 1211-1225, 2020. <https://doi.org/10.1523/JNEUROSCI.2287-19.2019>
- [11] Fortunato C, et al. Gamma sensory entrainment for cognitive improvement in neurodegenerative diseases: opportunities and challenges ahead. *Frontiers in Neuroscience*, 17, 2023. <https://pmc.ncbi.nlm.nih.gov/articles/PMC10149720/>
- [12] Patel V, et al. Brian Intensify: An Adaptive Machine Learning Framework for Auditory EEG Stimulation and Cognitive Enhancement. *arXiv*, 2024. <https://arxiv.org/html/2511.09765>

- [13] Lawhern VJ, Solon AJ, Waytowich NR, et al. EEGNet: a compact convolutional neural network for EEG-based brain-computer interfaces. *Journal of Neural Engineering*, 15(5), 056013, 2018. <https://doi.org/10.1088/1741-2552/aace8c>
- [14] Bergey GK, et al. Closed-Loop Neuromodulation in Physiological and Translational Research. *Frontiers in Neuroscience (PMC)*, 2019. <https://pmc.ncbi.nlm.nih.gov/articles/PMC6824403/>
- [15] Tafazoli S, et al. Closing the loop between brain and electrical stimulation: towards precision neuromodulation treatments. *Translational Psychiatry*, 13(1), 2023. <https://doi.org/10.1038/s41398-023-02565-5>
- [16] Tort ABL, Komorowski R, Eichenbaum H, Kopell N. Measuring Phase-Amplitude Coupling Between Neuronal Oscillations of Different Frequencies. *Journal of Neurophysiology*, 104(2), 1195-1210, 2010. <https://doi.org/10.1152/jn.00106.2010>
- [17] Naeini AH, et al. Non-invasive auditory brain stimulation for gamma-band entrainment in dementia patients: An EEG dataset. *Data in Brief (PMC)*, 2022. <https://pmc.ncbi.nlm.nih.gov/articles/PMC8800012/>