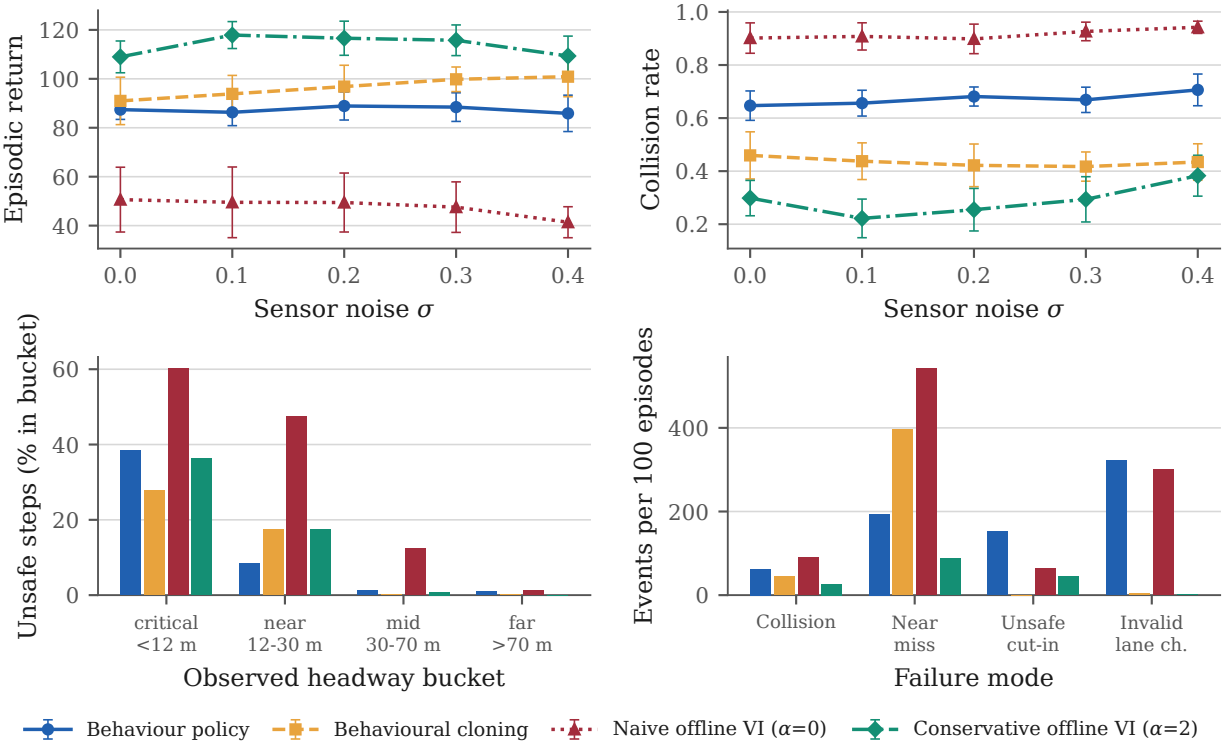
Episodic return
120
100
80
60
40
0.0
0.1
0.2
0.3
0.4
Sensor noise σ
Collision rate
1.0
0.8
0.6
0.4
0.2
0.0
0.1
0.2
0.3
0.4
Sensor noise σ
Unsafe steps (% in bucket)
60
40
20
0
critical
<12 m
near
12-30 m
mid
30-70 m
far
>70 m
Observed headway bucket
Events per 100 episodes
400
200
0
Collision
Near
miss
Unsafe
cut-in
Invalid
lane ch.
Failure mode
Behaviour policy
Behavioural cloning
Naive offline VI (α=0)
Conservative offline VI (α=2)